



2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA

## TECHNICAL DATA SHEET

**PE15A3259**

PE15A3259 is a Broadband High Gain GaAs PHEMT MMIC-based coaxial Low Noise Amplifier, operating in the 6 to 18 GHz frequency range. The amplifier offers 2.5 dB Noise Figure, +22 dBm of P1dB and 38 dB small signal gain, with the gain flatness of  $\pm 2.0$  dB, along with +30 dBm of IP3 performance. This low noise amplifier requires only a single positive DC supply, unconditionally stable, operates over the temperature range of  $-40^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$ , and characterized by a light weight (25 g) and small size (1.2"x1.0"x0.4").

### Features

- 6 to 18 GHz Frequency Range
- Noise Figure: 2.5dB typ
- Small Signal Gain: 38 dB
- Gain Flatness:  $\pm 2.0$  dB
- Gain Variation Over the Temperature Range:  $\pm 2.0$  dB
- P1dB: +22 dBm
- IP3: +30 dBm
- 50 Ohm Input and Output Matched
- $-40$  to  $+75^{\circ}\text{C}$  Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in DC Voltage Regulator
- Small Size & Light Weight

### Applications

- Laboratory Applications
- R&D Labs
- Electronic Warfare
- Telecom Infrastructure
- Test Instrumentation
- Military & Space
- Communication Systems
- Satellite Communications
- Wireless Communications
- Unmanned Systems
- Microwave Radio Systems
- Low Noise Amplifier
- General Purpose Amplification
- RF Front Ends

### Electrical Specifications (TA= 25°C, VDC = 12 Vdc)

Description	Minimum	Typical	Maximum	Units
Frequency Range	6		18	GHz
Gain	35	38	41	dB
Gain Flatness		$\pm 2$	$\pm 2.5$	dB
Gain Variation over OTR*		$\pm 2$		dB
Output at 1 dB Compression Point	+20	+22		dBm
Output 3 <sup>rd</sup> Intercept Point	+27	+30		dBm
Reverse Isolation	40	45		dB
Spurious			-60	dBc
Noise Figure		2.5	3	dB
Input VSWR		1.8:1	2.5:1	
Output VSWR		1.8:1	2.5:1	
Operating DC Voltage	10	12	15	Vdc
Operating DC Current at Quiescent	250	280	320	mA

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA PE15A3259](#)



2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise  
Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA

**TECHNICAL DATA SHEET**

**PE15A3259**

Operating DC Current at P1dB	300	380	mA
Operating Temperature Range (OTR)	-40	+75	°C

\*OTR= Base Plate Operating Temperature Range

**Mechanical Specifications**

**Size**

Length	1.5 in [38.1 mm]
Width	1 in [25.4 mm]
Height	0.4 in [10.16 mm]
Weight	0.071 lbs [32.21 g]
Input Connector	SMA Female
Output Connector	SMA Female

**Environmental Specifications**

**Temperature**

Operating Range	-40 to +75 deg C
Storage Range	-55 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA PE15A3259](#)





2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise  
Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA

**TECHNICAL DATA SHEET**

**PE15A3259**

**Typical Performance Data**

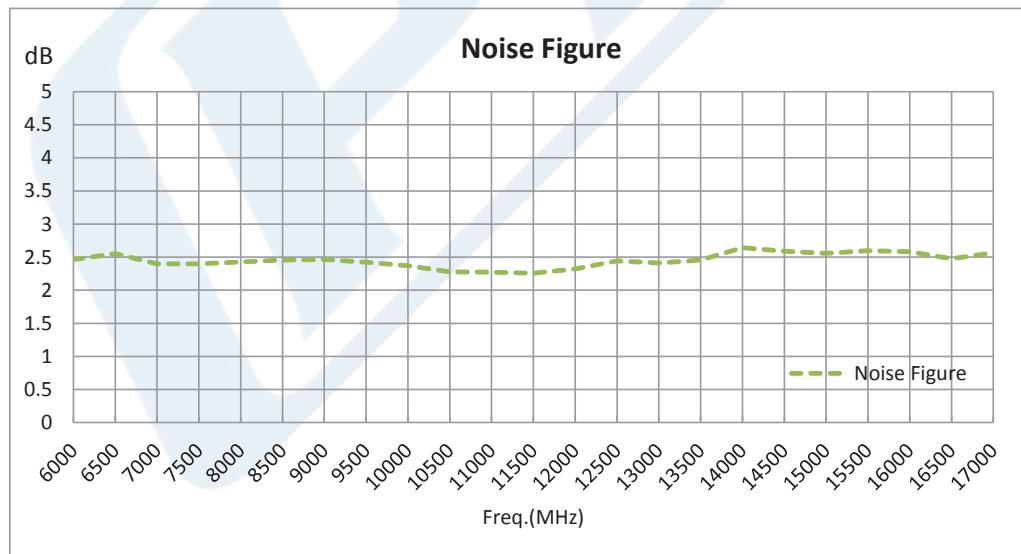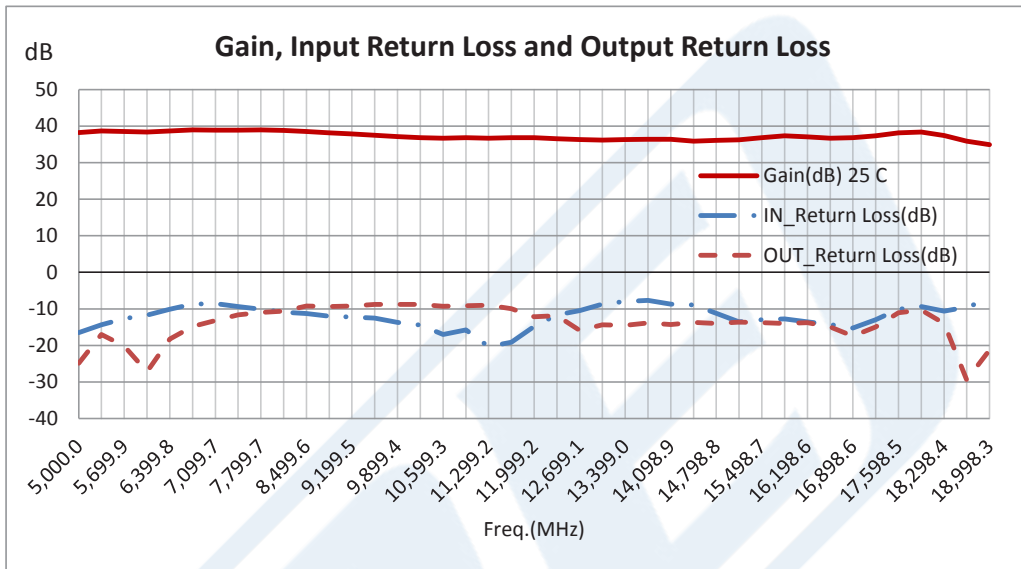

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA PE15A3259](#)



2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise  
Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA

## TECHNICAL DATA SHEET

**PE15A3259**

2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA PE15A3259](https://www.pasternack.com/3-db-18-ghz-low-noise-broadband-amplifier-38-db-gain-sma-pe15a3259-p.aspx)

URL: <https://www.pasternack.com/3-db-18-ghz-low-noise-broadband-amplifier-38-db-gain-sma-pe15a3259-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE15A3259 CAD Drawing

2.5 dB NF, 22 dBm P1dB, 6 GHz to 18 GHz, Low Noise  
Broadband Amplifier, 38 dB Gain, 30 dBm IP3, SMA

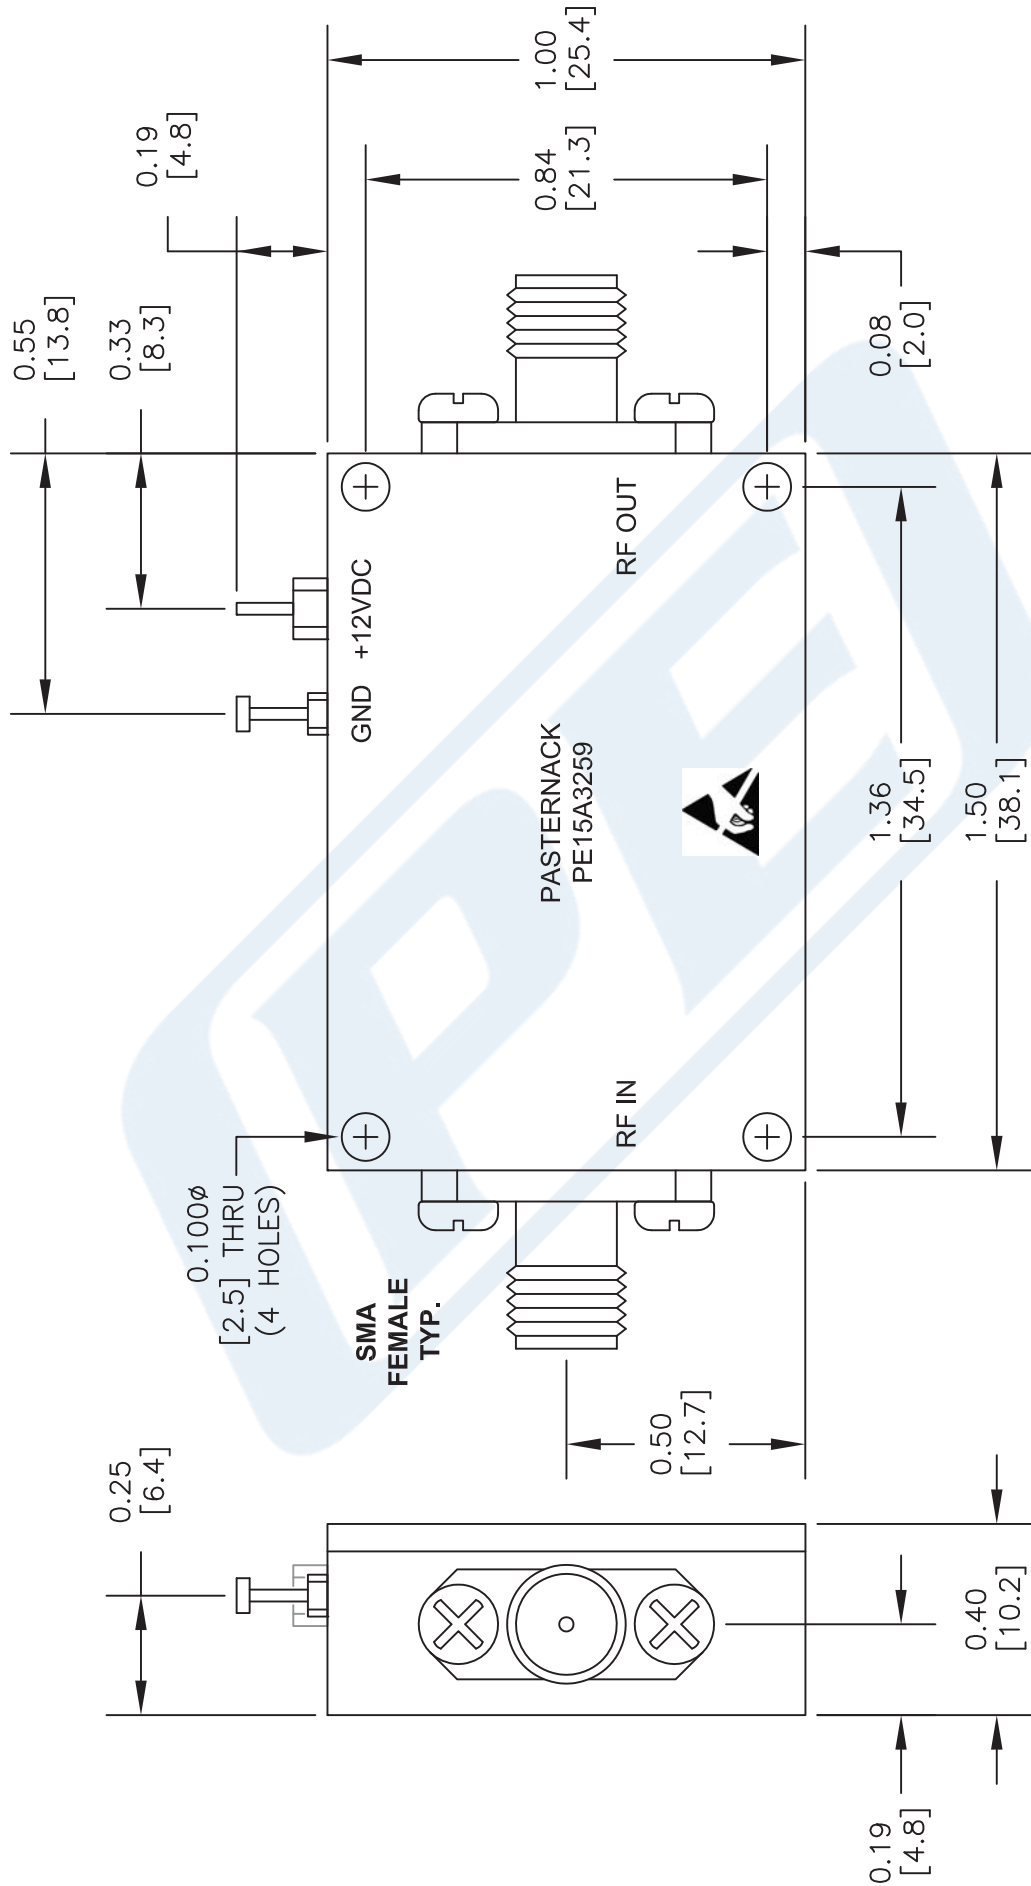

NOTE:  
HEAT SINK REQUIRED FOR PROPER OPERATION,  
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

**PE15A3259**

FSCM NO. 53919

CAD FILE 041114

SCALE N/A

SIZE A

2233



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com