

3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3296

The PE15A3296 is a broadband coaxial low noise amplifier, operating in the 12 to 18 GHz frequency range. The amplifier offers +13 dBm of P1dB min and 18 dB small signal gain min, with a Noise Figure of 3.5 dB. This low noise amplifier requires only a positive DC supply, in unconditionally stable, operates over the temperature range of -20°C to 85°C, and is Hermetically sealed.

Features

- 12 to 18 GHz Frequency Range
- P1dB: +13 dBm min
- Small Signal Gain: 18 dB min
- Noise Figure: 3.5 dB max
- 50 Ohm Input and Output Matched
- -20 to +85°C Operating Temperature
- Unconditionally Stable
- DC Positive Supply

Applications

- Laboratory Applications
- R&D Labs
- Test Instrumentation
- Military & Space
- Communication Systems
- Satellite Communications
- Wireless Communications
- Unmanned Systems
- Microwave Radio Systems
- Low Noise Amplifier
- General Purpose Amplification
- RF Front Ends


Electrical Specifications (TA= 25°C, VDC1 = 12 Vdc)

Description	Minimum	Typical	Maximum	Units
Frequency Range	12		18	GHz
Gain	18			dB
Output at 1 dB Compression Point	+13			dBm
Noise Figure		3.5		dB
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Voltage 1	11	12	13	Volts
Operating DC Current		100		mA
Operating Temperature Range (OTR)	-40		+80	°C

Mechanical Specifications

Weight	0.068 lbs [30.84 g]
Input Connector	SMA Female
Output Connector	SMA Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA PE15A3296](#)



3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low
Noise Broadband Amplifier, 18 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3296

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA PE15A3296](#)




3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA


TECHNICAL DATA SHEET

PE15A3296

Typical Performance Data

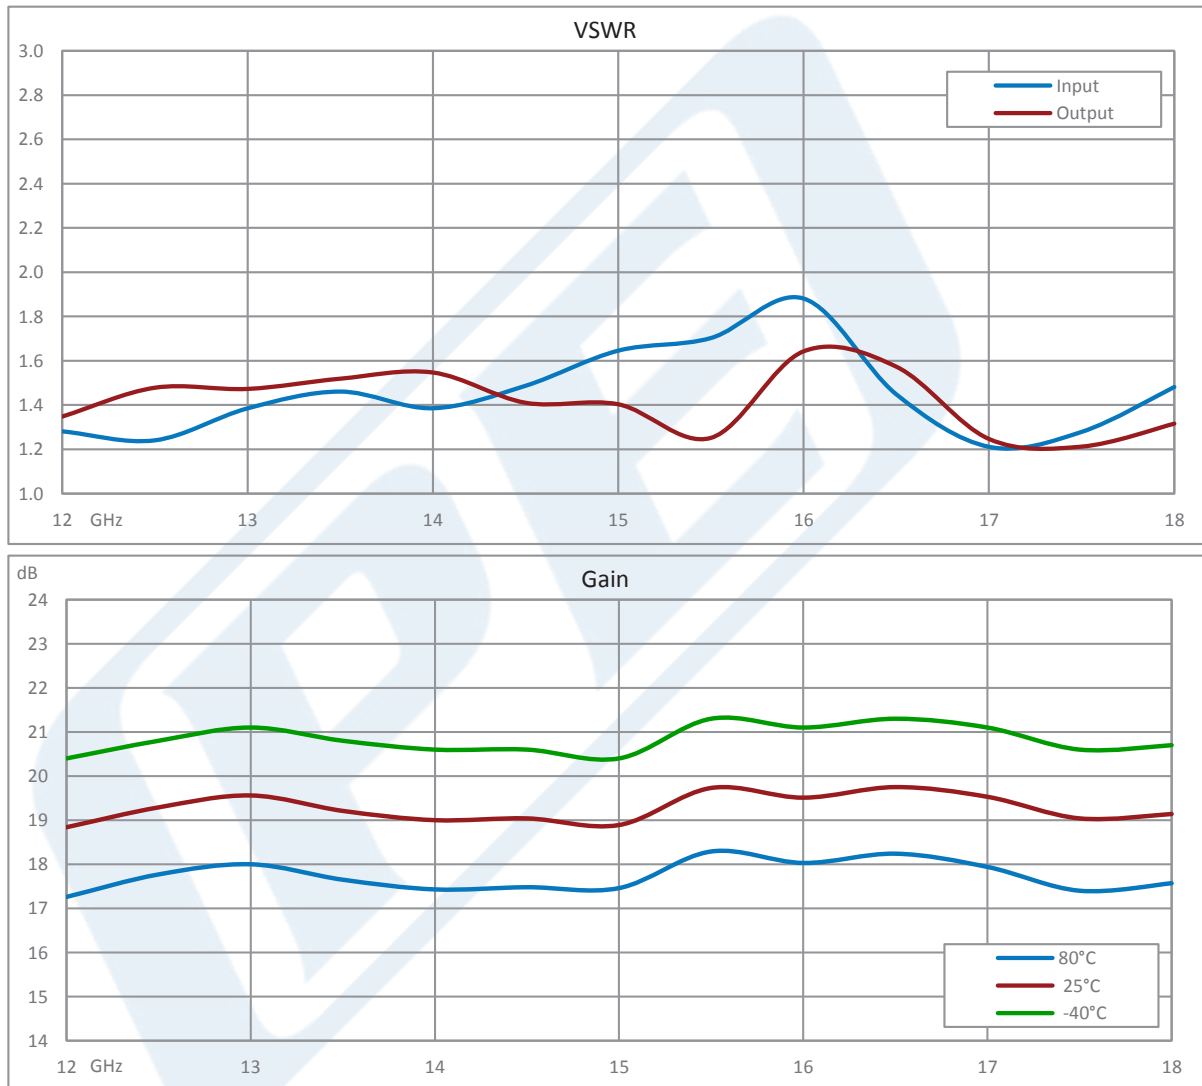


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA PE15A3296](#)




3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3296

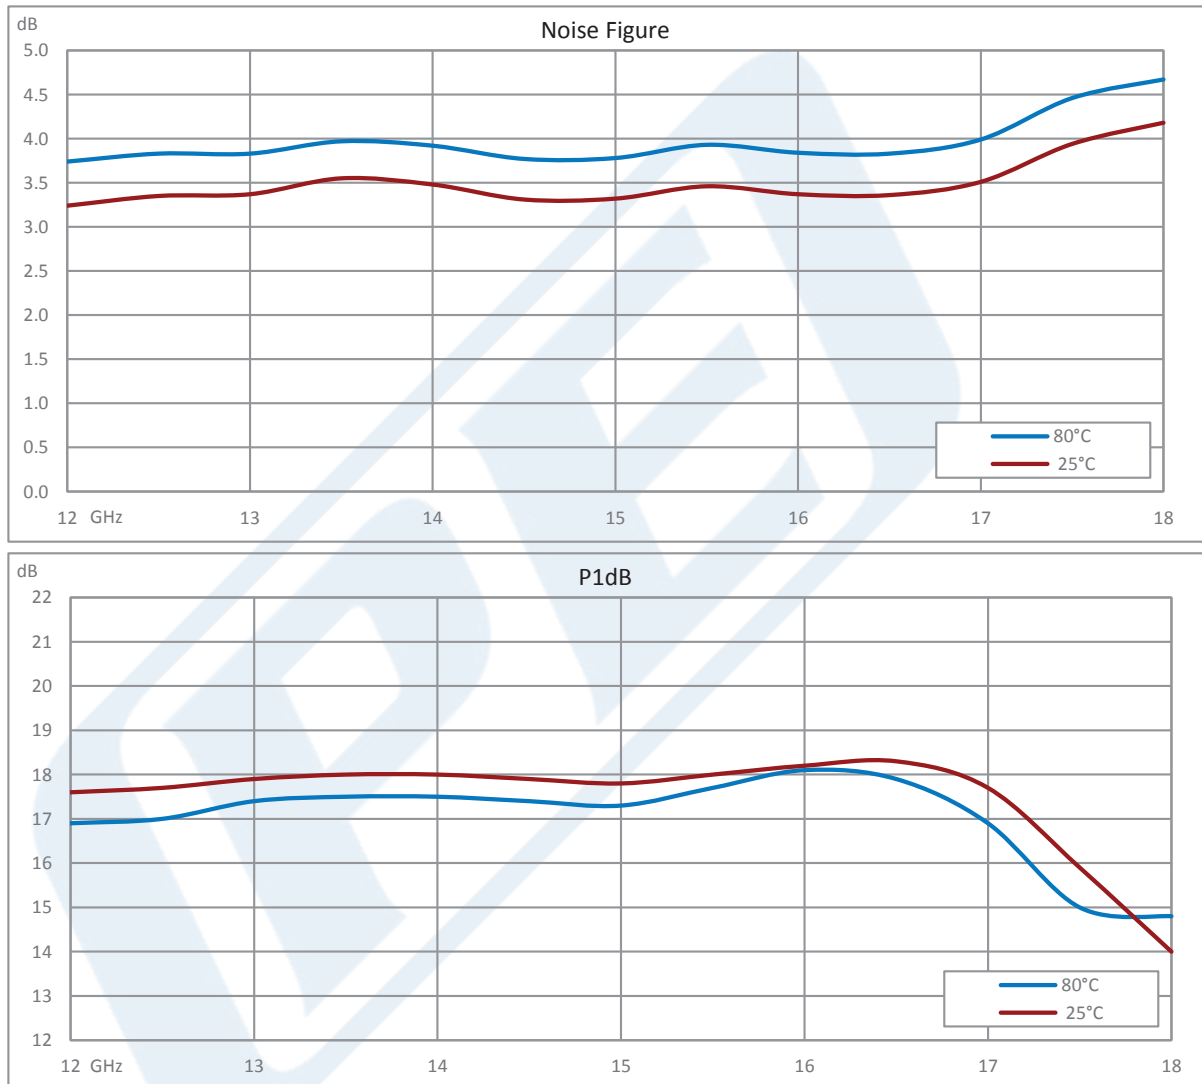

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA PE15A3296](#)



3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low
Noise Broadband Amplifier, 18 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3296

3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise Broadband Amplifier, 18 dB Gain, SMA PE15A3296](https://www.pasternack.com/3.5-db-18-ghz-low-noise-broadband-amplifier-18-db-gain-sma-pe15a3296-p.aspx)

URL: <https://www.pasternack.com/3.5-db-18-ghz-low-noise-broadband-amplifier-18-db-gain-sma-pe15a3296-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A3296 CAD Drawing

3.5 dB NF, 13 dBm P1dB, 12 GHz to 18 GHz, Low Noise
Broadband Amplifier, 18 dB Gain, SMA

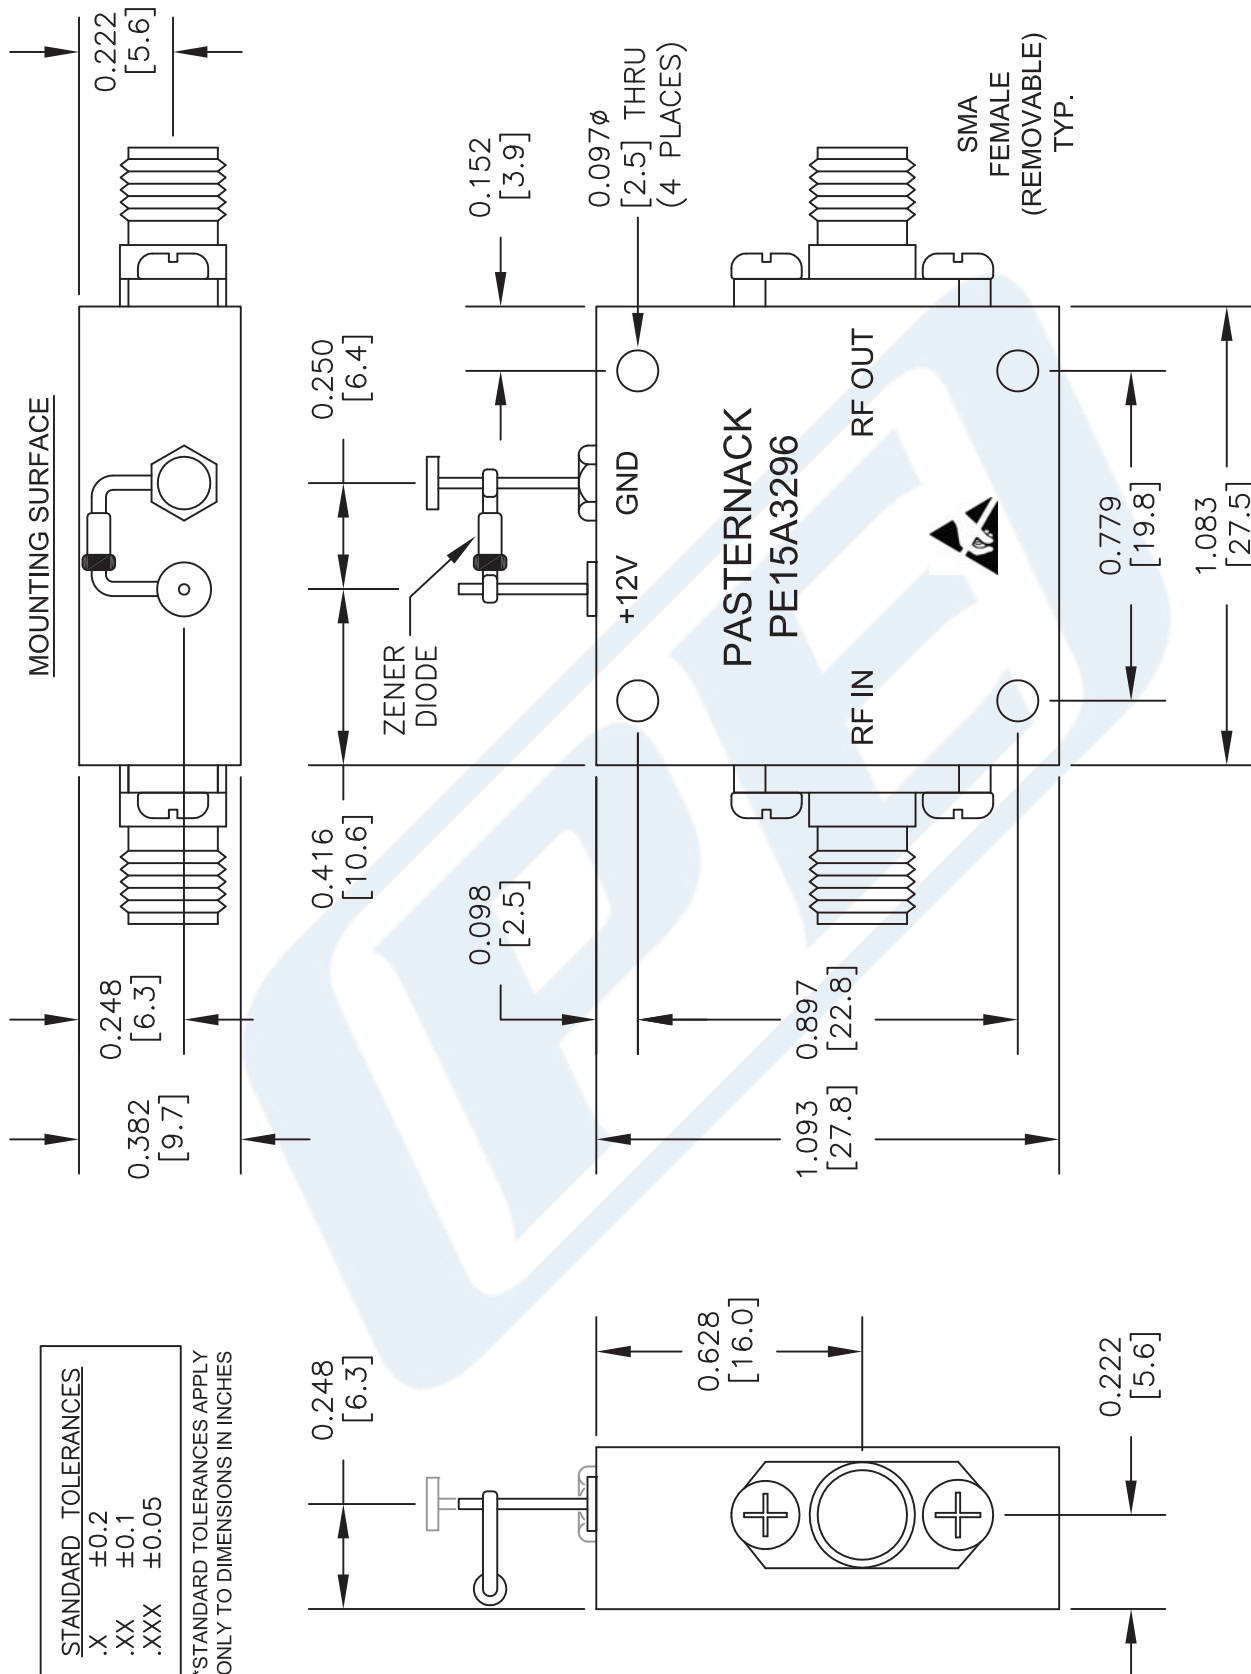

DWG TITLE

PE15A3296

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAGE CODE 53919

CAD FILE 121616

SCALE N/A

SIZE A

2233