



Voltage Controlled Oscillator, 1070 MHz to 1210 MHz, Pout +1.5 dBm, Phase Noise of -109 dBc/Hz, 0.5V to 4.5V Tuning Range, SMA

Voltage Control Oscillators Technical Data Sheet

PE1V31020

Features

- Voltage Controlled Oscillator
- 1070 MHz to 1210 MHz
- 0.5V to 4.5V Tuning Voltage
- Pout: +1.5 dBm
- Phase Noise: -109 dBc/Hz
- 2nd Harmonic Suppression: -16 dBc typ
- Tuning Sensitivity: 37 MHz/V
- +12 Volt DC Bias
- SMA Female Connectors
- -40°C to +85°C Operating Temperature
- 50 Ohm Design
- Internal Voltage Regulation
- Reverse DC Protection
- Rugged Package Design meets Mil-STD-202 Test Conditions

Applications

- Phase Locked Loop
- Function Generators
- Frequency Synthesizers
- Receivers
- Electronic Jamming Equipment
- Local Oscillators
- Wireless Communications
- SATCOM
- Optical Communications
- Military Electronic Systems
- Medical Equipment
- Test & Measurement

Description

The PE1V31020 is highly reliable low noise Voltage Controlled Oscillator (VCO) that operates across 1070 MHz to 1210 MHz with a tuning voltage range from 0.5V to 4.5V. Impressive typical performance includes generated output power of +1.5 dBm, 2nd Harmonic Suppression of -16 dBc, phase noise of -109 dBc/Hz @ 10 KHz offset, and tuning sensitivity of 37 MHz/V. The design incorporates internal voltage regulation and reverse DC protection, with a bias voltage range from +7V to +15V. The rugged and compact coaxial package assembly supports SMA female connectors, RFI and ground pins. The VCO has an operational temperature range of -40°C to +85°C and is designed to meet a variety of MIL-STD-202 test conditions including shock, vibration, altitude, and humidity.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	1.07		1.21	GHz
Tuning Voltage	0.5		4.5	Vdc
Supply Voltage (DC)	7	12	15	Vdc
Supply Current (DC)		20		mA
Phase Noise @ 10kHz Offset		-109		dBc/Hz
Output Power	-1	+1.5	+4	dBm
Tuning Sensitivity (Kvco)		37		MHz/V
Pulling (pk-pk)		1		MHz
Tuning Port Capacitance		100		pF
Load Impedance		50		Ohms
2nd Harmonics		-16		dBc

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator, 1070 MHz to 1210 MHz, Pout +1.5 dBm, Phase Noise of -109 dBc/Hz, 0.5V to 4.5V Tuning Range, SMA PE1V31020](#)



Voltage Controlled Oscillator, 1070 MHz to 1210 MHz, Pout +1.5 dBm, Phase Noise of -109 dBc/Hz, 0.5V to 4.5V Tuning Range, SMA

Voltage Control Oscillators Technical Data Sheet

PE1V31020

Mechanical Specifications

Size

Length	1.25 in [31.75 mm]
Width	1.25 in [31.75 mm]
Height	0.563 in [14.3 mm]
Weight	0.1 lbs [45.36 g]
Design	Commercial
Connector Option	Standard
Output Connector	SMA Female

Environmental Specifications

Temperature


Operating Range	-40 to +85 deg C
Storage Range	-55 to +100 deg C

Humidity	MIL-STD-202, Method 103B, Condition B
Shock	MIL-STD-202F, Method 213B, Condition B
Vibration	MIL-STD-202F, Method 204D, Condition B
Altitude	MIL-STD-202F, Method 105C, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Typical Performance Data

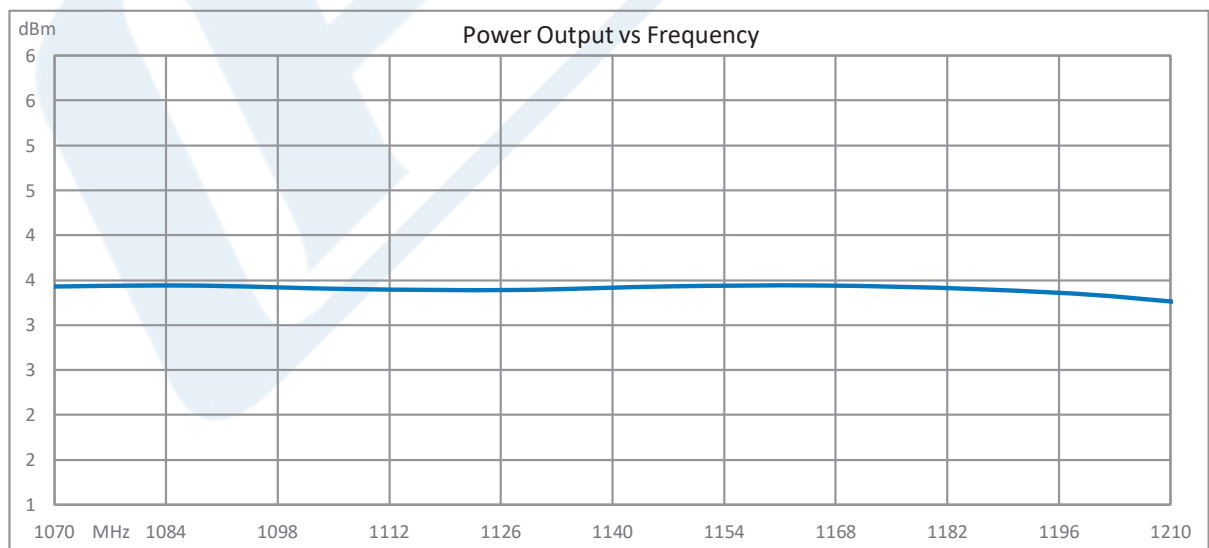


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator, 1070 MHz to 1210 MHz, Pout +1.5 dBm, Phase Noise of -109 dBc/Hz, 0.5V to 4.5V Tuning Range, SMA PE1V31020](#)



Voltage Controlled Oscillator, 1070 MHz to 1210 MHz, Pout +1.5 dBm, Phase Noise of -109 dBc/Hz, 0.5V to 4.5V Tuning Range, SMA

Voltage Control Oscillators Technical Data Sheet

PE1V31020

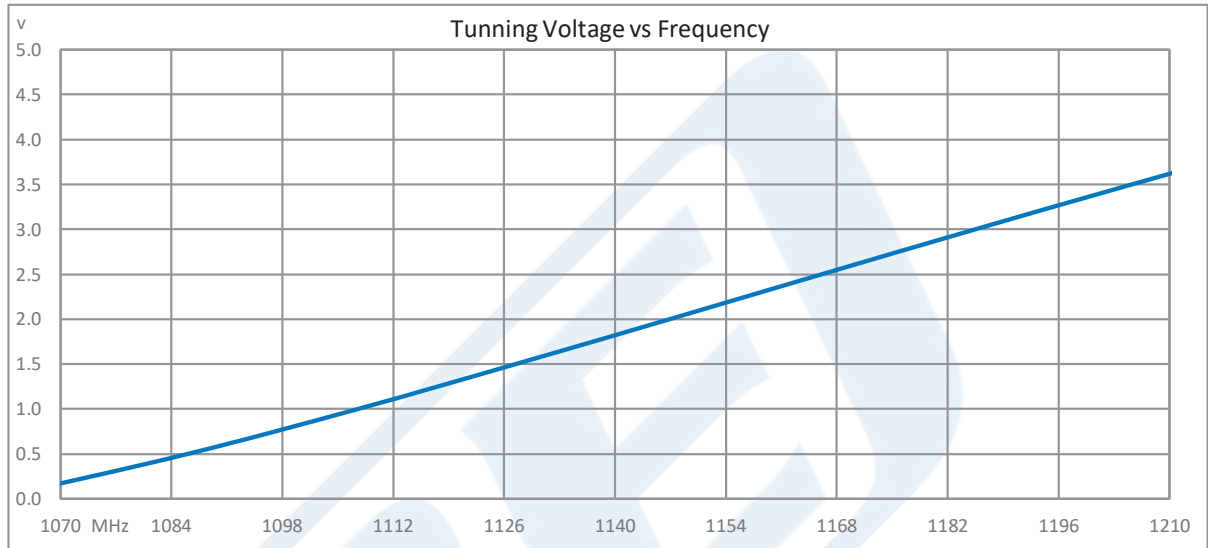

Voltage Controlled Oscillator, 1070 MHz to 1210 MHz, Pout +1.5 dBm, Phase Noise of -109 dBc/Hz, 0.5V to 4.5V Tuning Range, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Voltage Controlled Oscillator, 1070 MHz to 1210 MHz, Pout +1.5 dBm, Phase Noise of -109 dBc/Hz, 0.5V to 4.5V Tuning Range, SMA PE1V31020](#)


URL: <https://www.pasternack.com/voltage-controlled-oscillator-vco-1.21-ghz-pe1v31020-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE1V31020 CAD Drawing

Voltage Controlled Oscillator, 1070 MHz to 1210 MHz, Pout +1.5 dBm,
Phase Noise of -109 dBc/Hz, 0.5V to 4.5V Tuning Range, SMA

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	03-01-2021
		APPROVED
		TGALLA

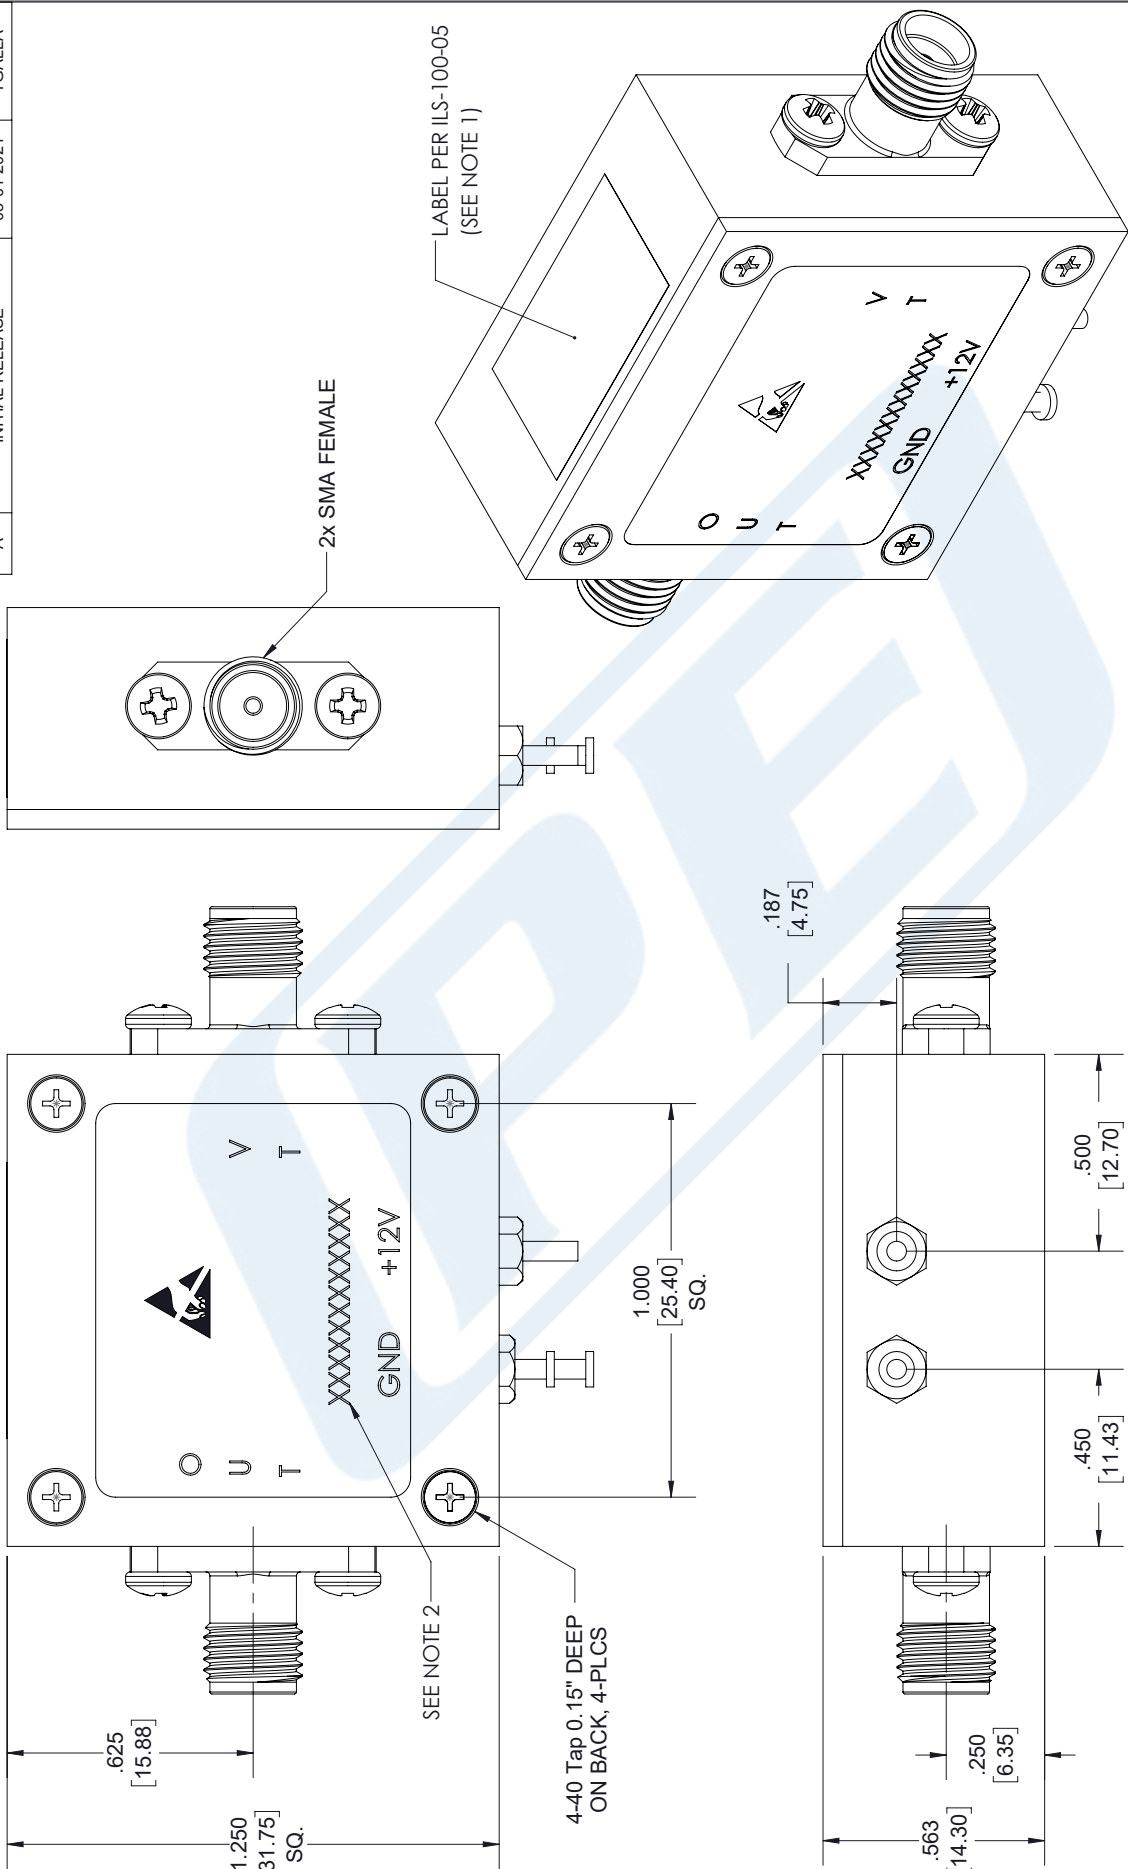

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

PE PASTERNAK
an INFINITE brand

Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2	[5.08]	FRACTIONS
.XX = ±.02	[.51]	± 1/32
.XXX = ±.005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L = +5%L / -0	

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

ITEM NO. PE1V31020

53919 MVEERAPPAN

53919 MVEERAPPAN

53919 MVEERAPPAN

- NOTES:**
- LABEL PER ILS-100-05. FOR INTERNAL REFERENCE ONLY. LABEL LOCATION SHOULD BE SAME AS SHOWN.
 - SERIAL NUMBER AND DATE CODE ARE COMBINED. EX: 202008280001.
- THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.