



## 4 Way Broadband Combiner from 2 GHz to 6 GHz Type N

### RF Combiners Technical Data Sheet

PE20S0017

#### Features

- 2000 to 6000 MHz Frequency
- 400 watt max power
- Insertion Loss: < 0.80 dB
- Phase Balance:  $\pm 5$  degrees
- Amplitude Balance:  $\pm 0.30$  dB
- High Power Handling Capability

#### Applications

- Communications Systems
- Power Combining
- PCS,GSM,LTE, Cellular
- Amplifier Systems
- Amplifier Power Combining
- Wireless Infrastructures
- Defence Applications

#### Description

PE20S0017 is a passive 4 way High Power Broadband RF Combiner with 50 ohm N connectors operating from 2000 to 6000 MHz, with max power at 400 watts. The PE20S0017 has a less than 0.80 dB typical low insertion loss and a Max VSWR of 1.30:1; along with a phase balance of  $\pm 5$  degrees and an amplitude balance of  $\pm 0.3$  dB. The RF Combiner operates in a temperature range from -55°C to 85°C, with a foot print of 4.51"x2.96"x1.10".

#### Electrical Specifications

Design	Reactive
Number of Input Ports	4

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		6	GHz
Impedance		50		Ohms
Output VSWR			1.3:1	
Insertion Loss			0.8	dB
Amplitude Balance		$\pm 0.3$		dB
Phase Balance		$\pm 5$		Degrees
Power Handling (CW)			400	Watts

\*\*See Electrical Notes

Electrical Specification Notes:  
The device is intended for coherent signal combining.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way Broadband Combiner from 2 GHz to 6 GHz Type N PE20S0017](#)



## 4 Way Broadband Combiner from 2 GHz to 6 GHz Type N

### RF Combiners Technical Data Sheet

PE20S0017

#### Mechanical Specifications

##### Size

Length	2.96 in [75.18 mm]
Width	4.51 in [114.55 mm]
Height	1.1 in [27.94 mm]
Weight	1.223 lbs [554.74 g]

Housing Material and Plating Aluminum Alloy

##### Configuration

Input Connector	N Female
Output Connectors	N Female

#### Environmental Specifications

##### Temperature

Operating Range	-55 to +85 deg C
-----------------	------------------

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way Broadband Combiner from 2 GHz to 6 GHz Type N PE20S0017](#)




4 Way Broadband Combiner from 2 GHz to 6 GHz Type N

RF Combiners Technical Data Sheet

PE20S0017

Typical Performance Data

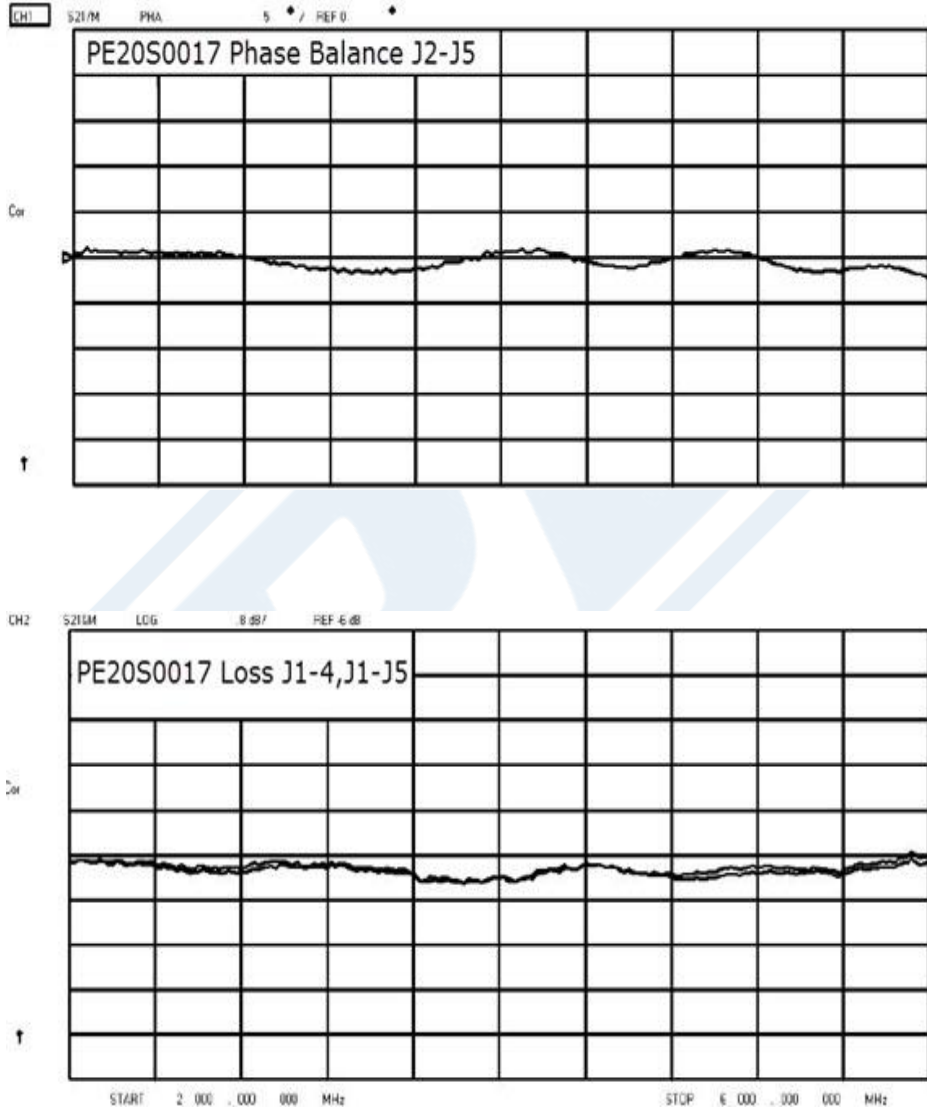


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way Broadband Combiner from 2 GHz to 6 GHz Type N PE20S0017](#)



4 Way Broadband Combiner from 2 GHz to 6 GHz Type N

RF Combiners Technical Data Sheet

PE20S0017

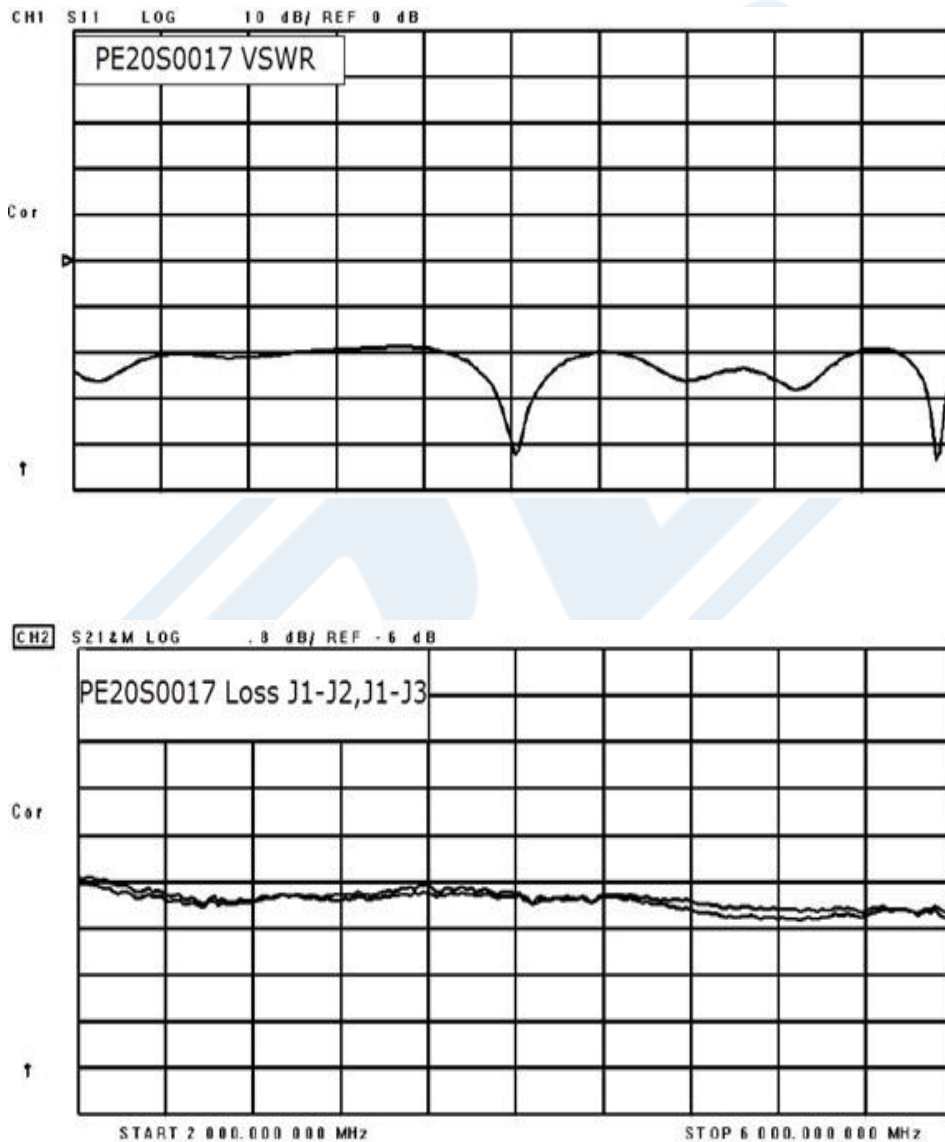



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way Broadband Combiner from 2 GHz to 6 GHz Type N PE20S0017](#)



4 Way Broadband Combiner from 2 GHz to 6 GHz Type N

RF Combiners Technical Data Sheet

PE20S0017

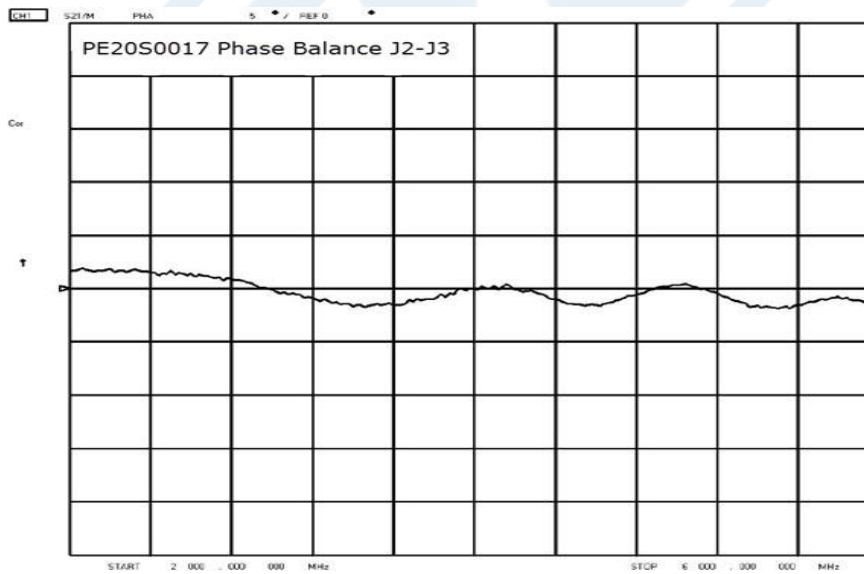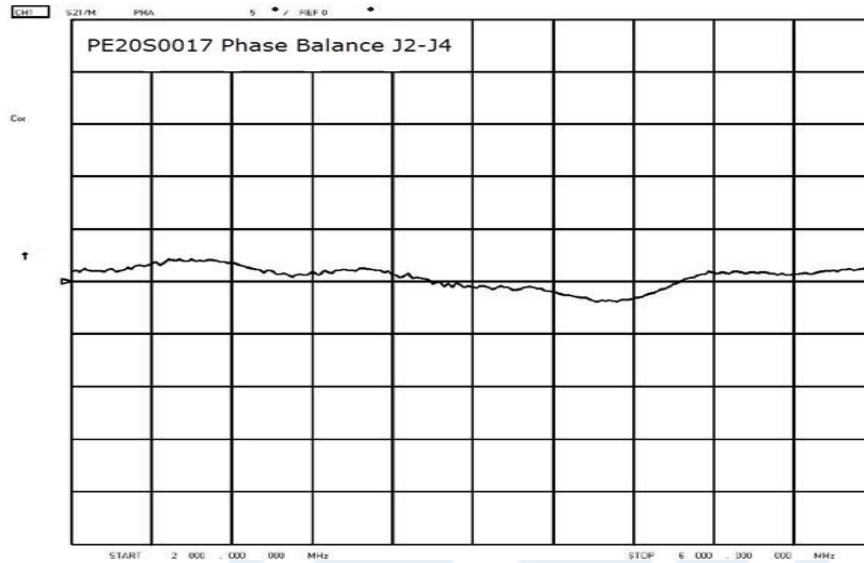

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way Broadband Combiner from 2 GHz to 6 GHz Type N PE20S0017](#)



## 4 Way Broadband Combiner from 2 GHz to 6 GHz Type N

### RF Combiners Technical Data Sheet

PE20S0017

4 Way Broadband Combiner from 2 GHz to 6 GHz Type N from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way Broadband Combiner from 2 GHz to 6 GHz Type N PE20S0017](https://www.pasternack.com/4-way-n-broadband-power-combiner-2-6-ghz-400-watts-pe20s0017-p.aspx)

URL: <https://www.pasternack.com/4-way-n-broadband-power-combiner-2-6-ghz-400-watts-pe20s0017-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE20S0017 CAD Drawing

4 Way Broadband Combiner from 2 GHz to 6 GHz Type N

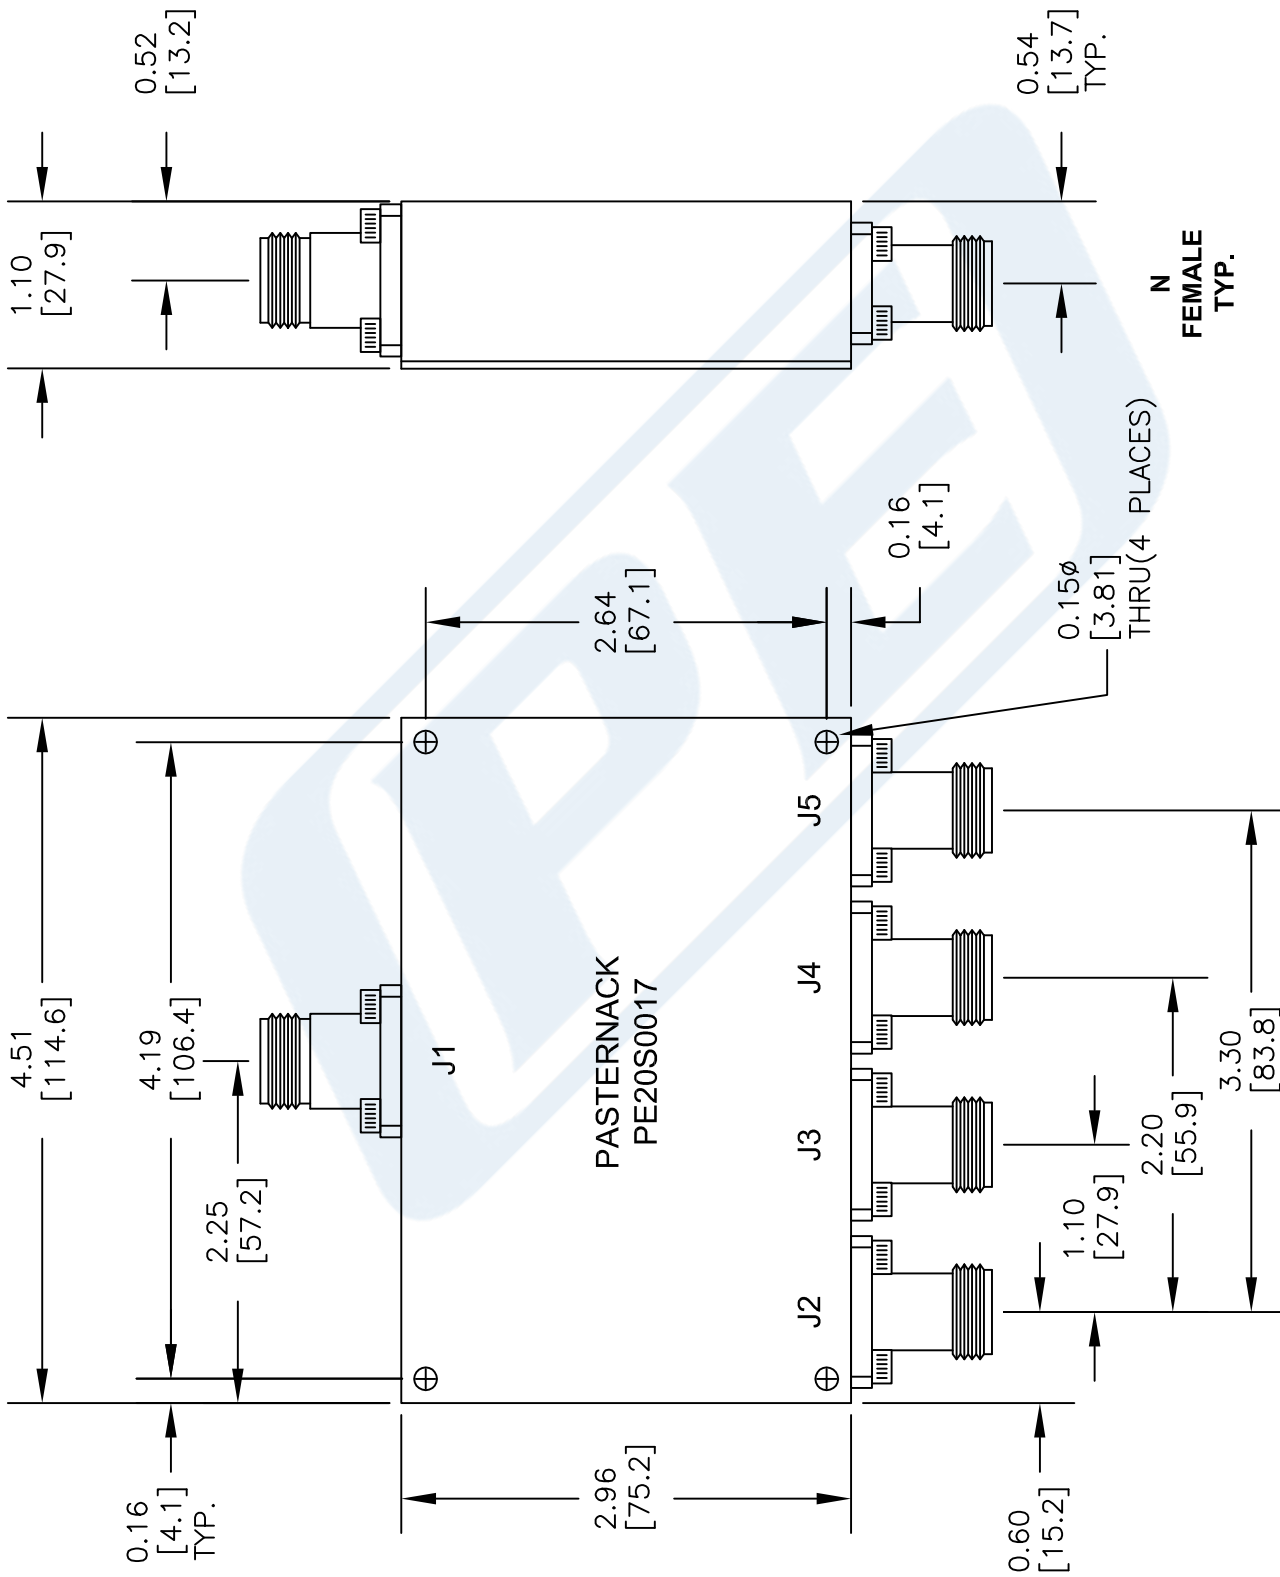

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE20S0017**

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 071614

SCALE N/A

SIZE A

150