

## HN Male to SHV Plug Cable Using RG213 Coax





### PE3148

#### Configuration

- Connector 1: HN Male
- Connector 2: SHV Plug
- Cable Type: RG213
- Coax Flex Type: Flexible

#### Features

- Max Frequency 300 MHz
- 66% Phase Velocity
- PVC Jacket

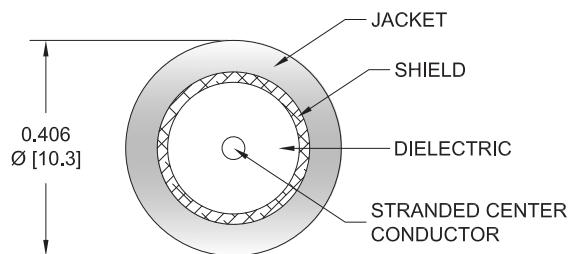

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3148 HN male to SHV plug cable using RG213 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack HN to SHV cable assembly has a male to plug gender configuration with 50 ohm flexible RG213 coax. The PE3148 HN male to SHV plug cable assembly operates to 300 MHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

#### Specifications by Frequency

## HN Male to SHV Plug Cable Using RG213 Coax



### PE3148

Part Number	Length	Description	F1	F2	F3	F4	Units MHz	Weight (lbs)
		Frequency	50	100	250	300		
PE3148	Custom Lengths Available	Insertion Loss (Typ.)	0.011	0.022	0.03	0.036	dB/ft	
			0.04	0.08	0.1	0.12	dB/m	
PE3148-24	24 inch	Insertion Loss (Typ.)	0.23	0.25	0.26	0.28	dB	0.368
PE3148-36	36 inch	Insertion Loss (Typ.)	0.24	0.27	0.29	0.31	dB	0.469
PE3148-48	48 inch	Insertion Loss (Typ.)	0.25	0.29	0.32	0.35	dB	0.57
PE3148-60	60 inch	Insertion Loss (Typ.)	0.26	0.31	0.35	0.38	dB	0.671
PE3148-72	72 inch	Insertion Loss (Typ.)	0.27	0.34	0.38	0.42	dB	0.772

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
Loss due to Connector 2: 0.1 dB  
Base Weight: 0.266 pounds  
Additional Weight per Inch: 0.00842 pounds

## Mechanical Specifications

### Cable Assembly

Weight 0.266 lbs [120.66 g]

### Cable

Cable Type	RG213
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.405 in [10.29 mm]
Repeated Minimum Bend Radius	1.6 in [40.64 mm]

## HN Male to SHV Plug Cable Using RG213 Coax



### PE3148

#### Connectors

Description	Connector 1	Connector 2
Type	HN Male	SHV Plug
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30µ in. minimum	30µ in. minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100µ in. minimum	100µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100µ in. minimum	

#### Environmental Specifications

Operating Range Temperature

-25 to +75 deg C

#### Compliance Certifications (see product page for current document)

#### Plotted and Other Data


Notes:

Values at 25°C, sea level.

## HN Male to SHV Plug Cable Using RG213 Coax

**PE3148****Typical Performance Data****How to Order**

Part Number Configuration:

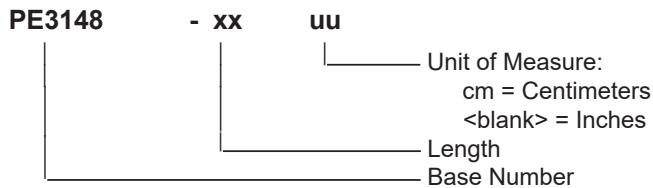

Example: PE3148-12 = 12 inches long cable  
PE3148-100cm = 100 cm long cable

HN Male to SHV Plug Cable Using RG213 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [HN Male to SHV Plug Cable Using RG213 Coax PE3148](#)

URL: <https://www.pasternack.com/hn-male-to-shv-plug-cable-using-rg213-pe3148-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3148 CAD Drawing

HN Male to SHV Plug Cable Using RG213 Coax

