



SMA Male to N Female 4 Hole Flange
Cable Using PE-SR402FL Coax

TECHNICAL DATA SHEET


PE33404

Configuration

- Connector 1: SMA Male
- Connector 2: N Female 4 Hole Flange
- Cable Type: PE-SR402FL
- Coax Flex Type: Formable

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity

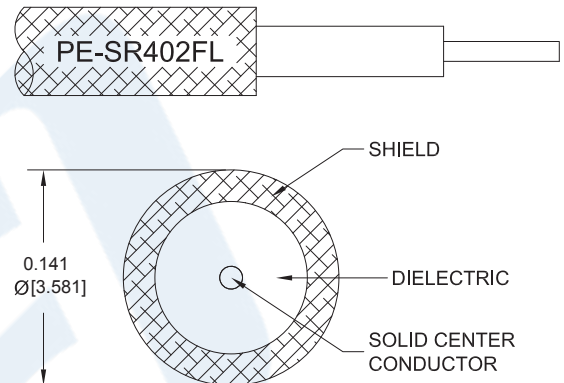

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE33404 SMA male to type N female 4 hole flange cable using PE-SR402FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to type N cable assembly has a male to female gender configuration with 50 ohm formable PE-SR402FL coax. The PE33404 SMA male to type N female cable assembly operates to 3 GHz. Our RF cable assembly with type N 4 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female 4 Hole Flange Cable Using PE-SR402FL Coax PE33404](#)



SMA Male to N Female 4 Hole Flange Cable Using PE-SR402FL Coax

TECHNICAL DATA SHEET

PE33404

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	500	1000	3000	0	0	MHz	
PE33404	Custom Lengths Available	Insertion Loss (Typ.)	0.08	0.12	0.2	0	0	dB/ft	
			0.27	0.4	0.66	0	0	dB/m	
PE33404-6	6 inch	Insertion Loss (Typ.)	0.24	0.26	0.3	0	0	dB	0.117
PE33404-9	9 inch	Insertion Loss (Typ.)	0.26	0.29	0.35	0	0	dB	0.123
PE33404-12	12 inch	Insertion Loss (Typ.)	0.28	0.32	0.4	0	0	dB	0.129
PE33404-18	18 inch	Insertion Loss (Typ.)	0.32	0.38	0.5	0	0	dB	0.142
PE33404-24	24 inch	Insertion Loss (Typ.)	0.36	0.44	0.6	0	0	dB	0.155

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.129 pounds
Additional Weight per Inch:	0.00209 pounds

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight	0.129 lbs [58.51 g]
--------	---------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female 4 Hole Flange Cable Using PE-SR402FL Coax PE33404](#)



SMA Male to N Female 4 Hole Flange Cable Using PE-SR402FL Coax

TECHNICAL DATA SHEET

PE33404

Cable

Cable Type	PE-SR402FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.57 in [39.88 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Threaded	N Female 4 Hole Flange Threaded
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	50µ in. minimum	
Dielectric Type	Teflon	
Body Material and Plating	Stainless Steel, Gold	Brass, Nickel
Body Plating Specification	10µ in. minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100µ in. minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female 4 Hole Flange Cable Using PE-SR402FL Coax PE33404](#)



SMA Male to N Female 4 Hole Flange
Cable Using PE-SR402FL Coax

TECHNICAL DATA SHEET

PE33404

How to Order

Part Number Configuration:

PE33404

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE33404-12 = 12 inches long cable
PE33404-100cm = 100 cm long cable

SMA Male to N Female 4 Hole Flange Cable Using PE-SR402FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female 4 Hole Flange Cable Using PE-SR402FL Coax PE33404](#)

URL: <https://www.pasternack.com/sma-male-to-n-female-4-hole-flange-cable-using-pe-sr402fl-pe33404-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE33404 CAD Drawing

SMA Male to N Female 4 Hole Flange Cable Using PE-SR402FL Coax

