

BNC Male Right Angle to BNC Male Right Angle Cable Using RG188 Coax with 180 Deg. Clock





PE3351/PH180

Configuration

- Connector 1: BNC Male Right Angle
- Connector 2: BNC Male Right Angle
- Cable Type: RG188
- Coax Flex Type: Flexible

Features

- Max Frequency 2 GHz
- PTFE Jacket

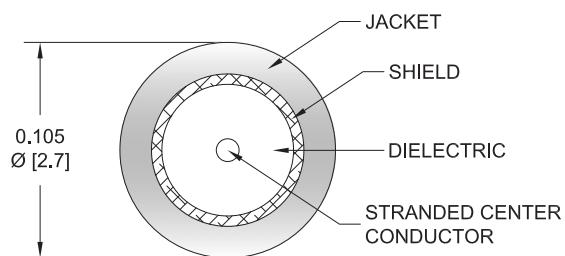

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3351/PH180 BNC male right angle to BNC male right angle cable using RG188 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG188 coax. The PE3351/PH180 BNC male to BNC male cable assembly operates to 2 GHz. The right angle BNC interfaces on the RG188 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.4:1	

Mechanical Specifications

Cable Assembly	
Weight	0.114 lbs [51.71 g]
Cable	
Cable Type	RG188
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE

BNC Male Right Angle to BNC Male Right Angle Cable Using RG188 Coax with 180 Deg. Clock



PE3351/PH180

Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.11 in [2.79 mm]

Connectors

Description	Connector 1	Connector 2
Type	BNC Male Right Angle	BNC Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in minimum

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

BNC Male Right Angle to BNC Male Right Angle Cable Using RG188 Coax with 180 Deg. Clock



PE3351/PH180

Typical Performance Data

How to Order

Part Number Configuration:

PE3351/PH180 - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE3351/PH180-12 = 12 inches long cable
PE3351/PH180-100cm = 100 cm long cable

BNC Male Right Angle to BNC Male Right Angle Cable Using RG188 Coax with 180 Deg. Clock from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to BNC Male Right Angle Cable Using RG188 Coax with 180 Deg. Clock PE3351/PH180](#)

URL: <https://www.pasternack.com/bnc-male-right-angle-to-bnc-male-cable-using-rg188-with-180-deg.-clock-pe3351-ph180-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3351/PH180 CAD Drawing

BNC Male Right Angle to BNC Male Right Angle Cable Using RG188 Coax with 180 Deg. Clock

