

MCX Plug Right Angle to BNC Female Bulkhead Cable Using RG316 Coax





PE33764

Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: BNC Female Bulkhead
- Cable Type: RG316
- Coax Flex Type: Flexible

Features

- Max Frequency 1 GHz
- FEP Jacket

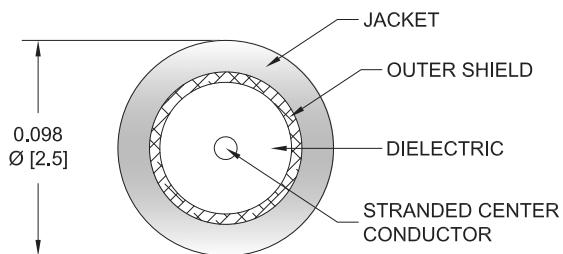

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE33764 MCX plug right angle to BNC female bulkhead cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to BNC cable assembly has a plug to female gender configuration with 50 ohm flexible RG316 coax. The PE33764 MCX plug to BNC female cable assembly operates to 1 GHz. The right angle MCX interface on the RG316 cable allows for easier connections in tight spaces. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Capacitance		32 [104.99]		pF/ft [pF/m]

Specifications by Frequency

MCX Plug Right Angle to BNC Female Bulkhead Cable Using RG316 Coax



PE33764

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	50	100	250	500	1000	MHz	
PE33764	Custom Lengths Available	Insertion Loss (Typ.)	0.07	0.11	0.16	0.23	0.38	dB/ft	
			0.23	0.37	0.53	0.76	1.25	dB/m	
PE33764-12	12 inch	Insertion Loss (Typ.)	0.37	0.41	0.46	0.53	0.68	dB	0.064
PE33764-24	24 inch	Insertion Loss (Typ.)	0.44	0.52	0.62	0.76	1.06	dB	0.075
PE33764-36	36 inch	Insertion Loss (Typ.)	0.51	0.63	0.78	0.99	1.44	dB	0.085
PE33764-48	48 inch	Insertion Loss (Typ.)	0.58	0.74	0.94	1.22	1.82	dB	0.095
PE33764-72	72 inch	Insertion Loss (Typ.)	0.72	0.96	1.26	1.68	2.58	dB	0.115

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.2 dB

Base Weight: 0.064 pounds

Additional Weight per Inch: 0.00084 pounds

Mechanical Specifications

Cable Assembly

Weight 0.064 lbs [29.03 g]

Cable

Cable Type RG316
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.098 in [2.49 mm]

Connectors

Description	Connector 1	Connector 2
Type	MCX Plug Right Angle	BNC Female Bulkhead
Specification	CECC 22220	
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum

MCX Plug Right Angle to BNC Female Bulkhead Cable Using RG316 Coax



PE33764

Environmental Specifications

Operating Range Temperature

-40 to +60 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:

Values at 25°C, sea level.

Typical Performance Data

How to Order

Part Number Configuration:

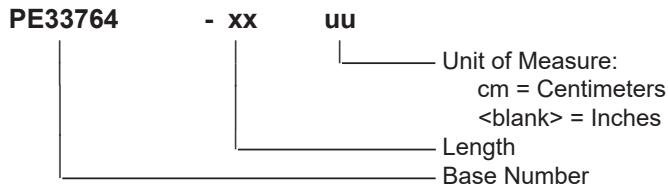

Example: PE33764-12 = 12 inches long cable
PE33764-100cm = 100 cm long cable

MCX Plug Right Angle to BNC Female Bulkhead Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to BNC Female Bulkhead Cable Using RG316 Coax PE33764](#)

URL: <https://www.pasternack.com/mcx-plug-right-angle-to-bnc-female-bulkhead-cable-using-rg316-pe33764-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE33764 CAD Drawing

MCX Plug Right Angle to BNC Female Bulkhead Cable Using RG316 Coax

