

MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder



RF Cable Assemblies Technical Data Sheet



PE33795LF/HS

Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: SMA Female
- Cable Type: RG316
- Coax Flex Type: Flexible

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

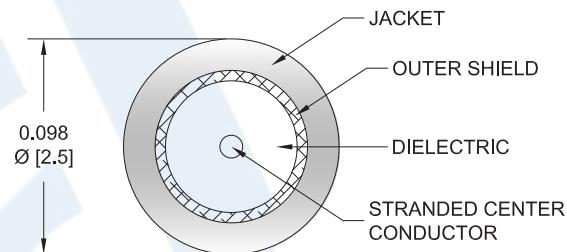

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE33795LF/HS MCX plug right angle to SMA female cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to SMA cable assembly has a plug to female gender configuration with 50 ohm flexible RG316 coax. The PE33795LF/HS MCX plug to SMA female cable assembly operates to 3 GHz. The right angle MCX interface on the RG316 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder PE33795LF/HS](#)



MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE33795LF/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Capacitance		32 [104.99]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.11	0.16	0.238	0.38	0.58	dB/ft
	0.36	0.52	0.78	1.25	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the SMA connector and 0.2 dB for the MCX connector.

Mechanical Specifications

Cable Assembly

Weight 0.026 lbs [11.79 g]

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.098 in [2.49 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder PE33795LF/HS](#)



MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE33795LF/HS

Connectors

Description	Connector 1	Connector 2
Type	MCX Plug Right Angle	SMA Female
Specification	CECC 22220	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Mating Cycles		100
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	30 μ in minimum	
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder PE33795LF/HS](#)

MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder



RF Cable Assemblies Technical Data Sheet

PE33795LF/HS

How to Order

Part Number Configuration:

PE33795LF/HS - xx**uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length
Base Number

Example: PE33795LF/HS-12 = 12 inches long cable
PE33795LF/HS-100cm = 100 cm long cable

MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMA Female Cable Using RG316 Coax with HeatShrink, LF Solder PE33795LF/HS](#)

URL: <https://www.pasternack.com/mcx-plug-right-angle-to-sma-female-cable-using-rg316-with-heatshrink-lf-solder-pe33795lf-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE33795LF/HS CAD Drawing
MCX Plug Right Angle to SMA Female Cable Using
RG316 Coax with HeatShrink, LF Solder

