

SMA Male to N Male Right Angle Cable Using RG142 Coax




PE3426

Configuration

- Connector 1: SMA Male
- Connector 2: N Male Right Angle
- Cable Type: RG142
- Coax Flex Type: Flexible

Features

- Max Frequency 1 GHz
- Shielding Effectivity > 90 dB
- 69.2% Phase Velocity
- Double Shielded
- FEP Jacket

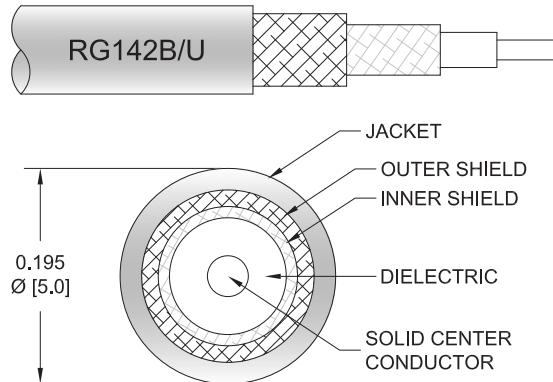

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3426 SMA male to type N male right angle cable using RG142 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG142 coax. The PE3426 SMA male to type N male cable assembly operates to 1 GHz. The right angle type N interface on the RG142 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		69.2		%
RF Shielding	90			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Specifications by Frequency

SMA Male to N Male Right Angle Cable Using RG142 Coax



PE3426

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	50	100	250	500	1000	MHz	
PE3426	Custom Lengths Available	Insertion Loss (Typ.)	0.02	0.039	0.059	0.087	0.129	dB/ft	
			0.07	0.13	0.2	0.29	0.43	dB/m	
PE3426-12	12 inch	Insertion Loss (Typ.)	0.32	0.34	0.36	0.39	0.43	dB	0.184
PE3426-24	24 inch	Insertion Loss (Typ.)	0.34	0.38	0.42	0.48	0.56	dB	0.226
PE3426-36	36 inch	Insertion Loss (Typ.)	0.36	0.42	0.48	0.57	0.69	dB	0.268
PE3426-48	48 inch	Insertion Loss (Typ.)	0.38	0.46	0.54	0.65	0.82	dB	0.31
PE3426-60	60 inch	Insertion Loss (Typ.)	0.4	0.5	0.6	0.74	0.95	dB	0.352

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
 Loss due to Connector 2: 0.2 dB
 Base Weight: 0.184 pounds
 Additional Weight per Inch: 0.0035 pounds

Mechanical Specifications

Cable Assembly

Weight 0.184 lbs [83.46 g]

Cable

Cable Type RG142
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.195 in [4.95 mm]
 One Time Minimum Bend Radius 0.984 in [24.99 mm]
 Repeated Minimum Bend Radius 2 in [50.8 mm]

SMA Male to N Male Right Angle Cable Using RG142 Coax

PE3426



Connectors

Description	Connector 1	Connector 2
Type	SMA Male	N Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	
Hex Size	5/16 in	
Torque	5 in-lbs 0.57 Nm	

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications

(see [product page](#) for current document)


Plotted and Other Data

Notes:
Values at 25°C, sea level.

SMA Male to N Male Right Angle Cable Using RG142 Coax

**PE3426****Typical Performance Data****How to Order**

Part Number Configuration:

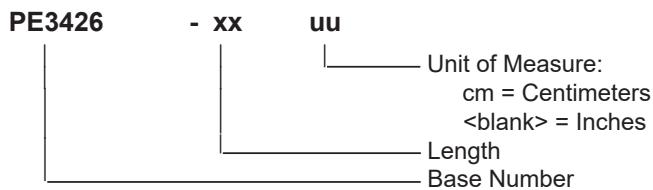

Example: PE3426-12 = 12 inches long cable
PE3426-100cm = 100 cm long cable

SMA Male to N Male Right Angle Cable Using RG142 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Right Angle Cable Using RG142 Coax PE3426](#)

URL: <https://www.pasternack.com/sma-male-to-n-male-cable-using-rg142-pe3426-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3426 CAD Drawing

SMA Male to N Male Right Angle Cable Using RG142 Coax

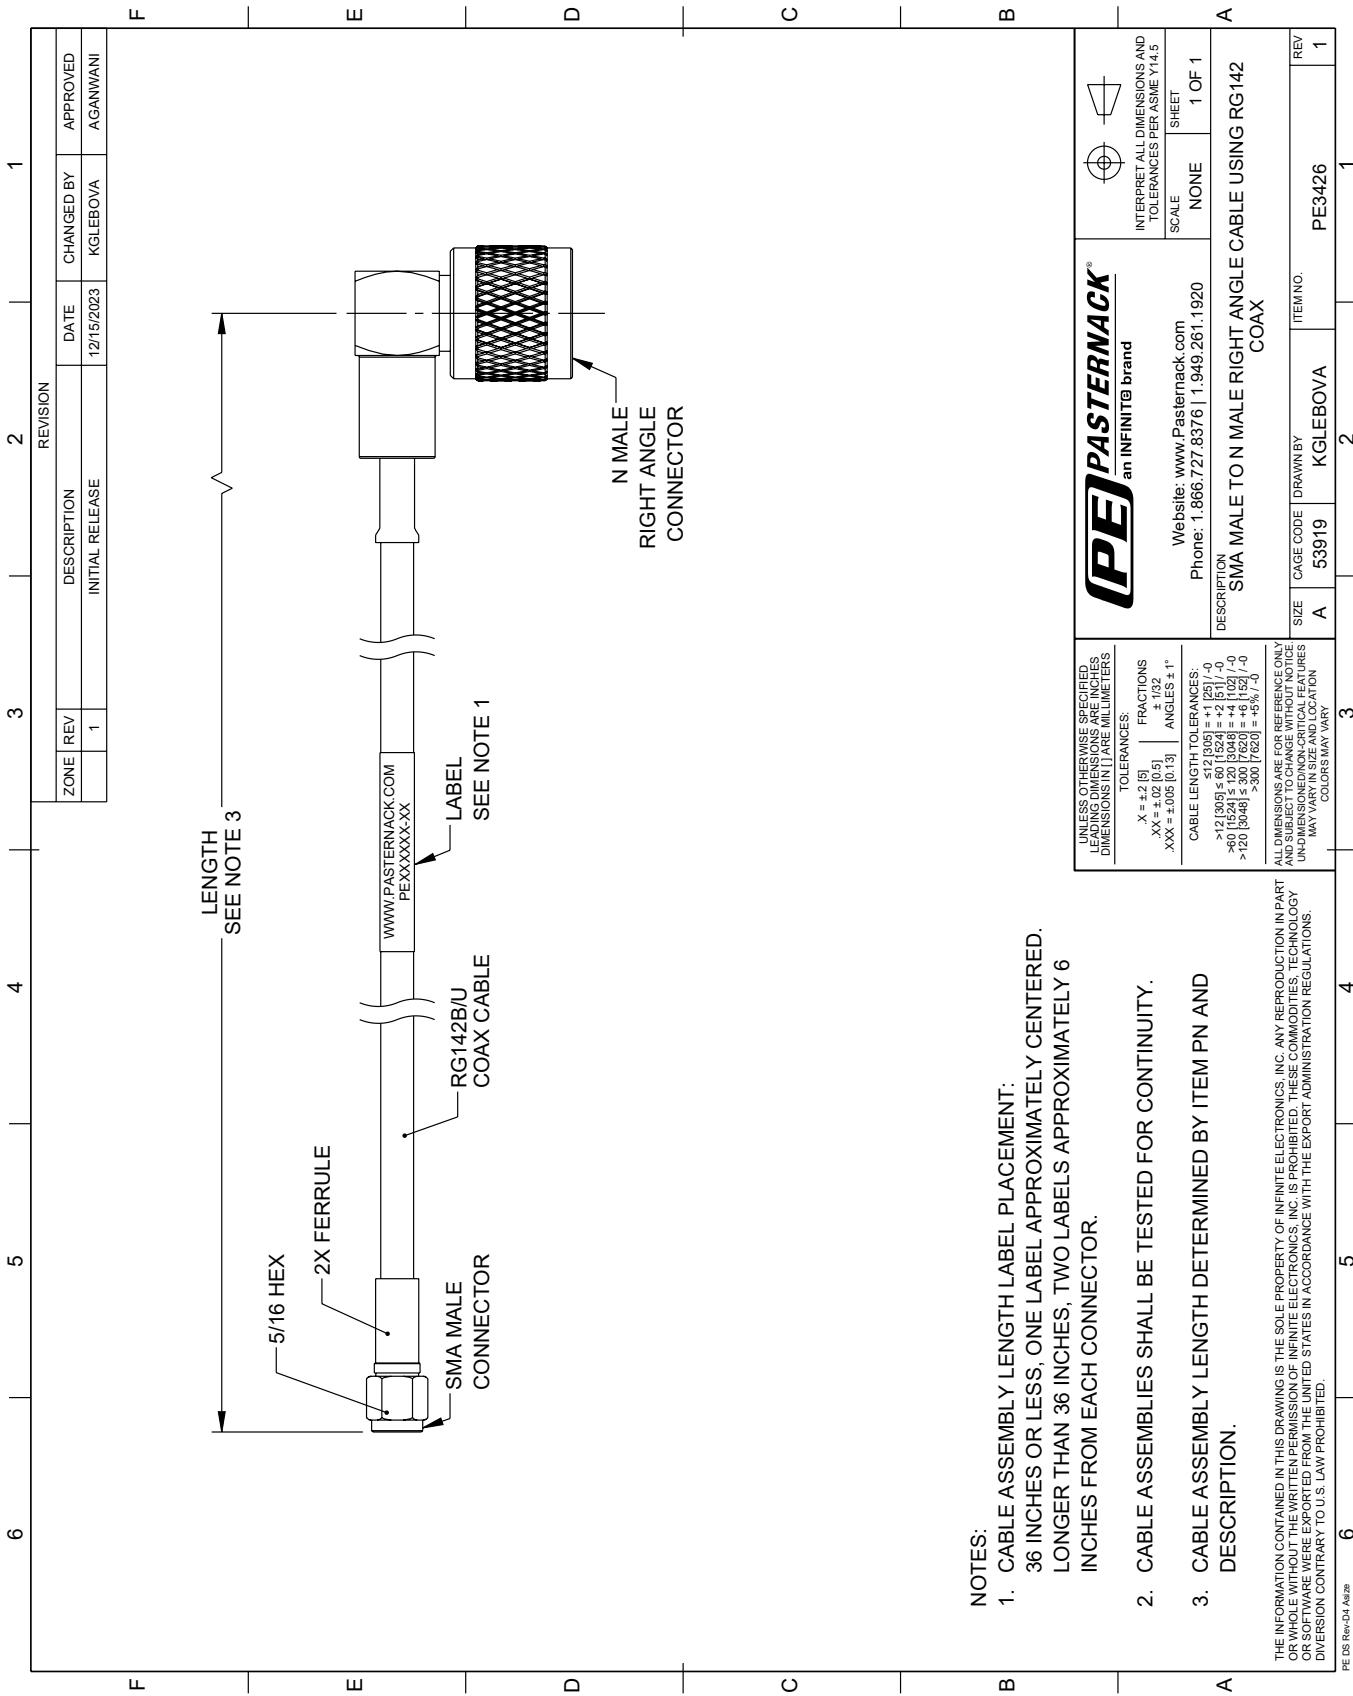

NOTES:
1. CABL 36 INCHES LONG

2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF [REDACTED] INC. AND ANY REPRODUCTION IN PART OR WHOLE, OR THE DISCLOSURE OF THE CONTENTS HEREIN, TO PERSONS NOT AUTHORIZED THEREFOR, IN WHOLE OR IN PART, IS PROHIBITED. THIS DRAWING IS THE PROPERTY OF [REDACTED] INC. AND IS PROTECTED BY UNITED STATES AND INTERNATIONAL COPYRIGHT LAWS. THIS DRAWING IS FOR THE USE OF [REDACTED] INC. AND IS NOT TO BE COPIED, REPRODUCED, OR DISCLOSED EXCEPT AS AUTHORIZED IN WRITING BY [REDACTED] INC. THIS DRAWING IS NOT TO BE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

CORN			
ALL DIMENSIONS ARE IN INCHES EXCEPT LENGTH WHICH IS IN FEET. REPEAT EACH LINE AS NECESSARY.			
ALL DIMENSIONS ARE IN INCHES EXCEPT LENGTH WHICH IS IN FEET. REPEAT EACH LINE AS NECESSARY.			
ITEM NO.	PE3426	REV	1
DRAWN BY	KGLEBOVA		
CAGE CODE	53919		
SIZE	A		
		1	1
		2	2
		3	3

© 2023 Infinite Electronics, Inc. Pasternack is a registered trademark of Infinite Electronics, Inc.

+1 (866) 558-2786 | sales@pasternack.com | pasternack.com