

## SMA Male to BNC Male Right Angle Cable Using RG188 Coax

### PE3464




#### Configuration

- Connector 1: SMA Male
- Connector 2: BNC Male Right Angle
- Cable Type: RG188
- Coax Flex Type: Flexible

#### Features

- Max Frequency 2 GHz
- PTFE Jacket

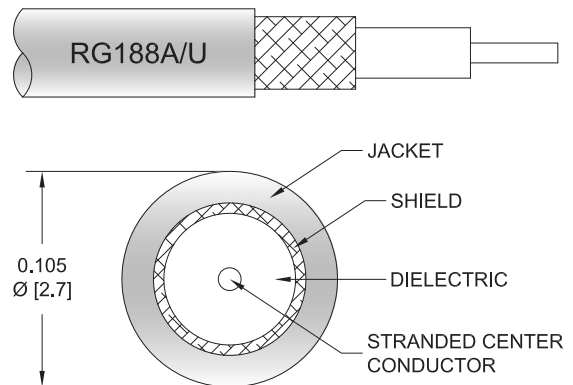

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3464 SMA male to BNC male right angle cable using RG188 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG188 coax. The PE3464 SMA male to BNC male cable assembly operates to 2 GHz. The right angle BNC interface on the RG188 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.4:1	

#### Mechanical Specifications

##### Cable Assembly

Weight 0.074 lbs [33.57 g]

##### Cable

Cable Type	RG188
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1

## SMA Male to BNC Male Right Angle Cable Using RG188 Coax



### PE3464

Shield Layer 1	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.11 in [2.79 mm]

### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	BNC Male Right Angle
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum
Hex Size	5/16 in	
Torque	5 in-lbs 0.57 Nm	

### Environmental Specifications

Operating Range Temperature	-55 to +165 deg C
-----------------------------	-------------------

### Compliance Certifications (see [product page](#) for current document)

### Plotted and Other Data

Notes:  
Values at 25°C, sea level.

## SMA Male to BNC Male Right Angle Cable Using RG188 Coax

### PE3464



#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE3464**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length  
Base Number

Example: PE3464-12 = 12 inches long cable  
PE3464-100cm = 100 cm long cable

SMA Male to BNC Male Right Angle Cable Using RG188 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Right Angle Cable Using RG188 Coax PE3464](#)

URL: <https://www.pasternack.com/sma-male-to-bnc-male-cable-using-rg188-pe3464-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3464 CAD Drawing
SMA Male to BNC Male Right Angle Cable Using RG188 Coax

