

SMA Male Right Angle to MMCX Plug Right Angle
Cable Using RG316 Coax with 90 Deg. Clock



RF Cable Assemblies Technical Data Sheet


PE34730/PH90

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: MMCX Plug Right Angle
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

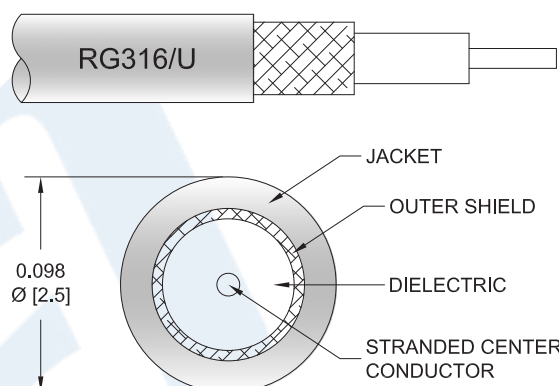

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE34730/PH90 SMA male right angle to MMCX plug right angle cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to MMCX cable assembly has a male to plug gender configuration with 50 ohm flexible RG316 coax. The PE34730/PH90 SMA male to MMCX plug cable assembly operates to 3 GHz. The right angle SMA and right angle MMCX interfaces on the RG316 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316 Coax with 90 Deg. Clock PE34730/PH90](#)



SMA Male Right Angle to MMCX Plug Right Angle
Cable Using RG316 Coax with 90 Deg. Clock

RF Cable Assemblies Technical Data Sheet

PE34730/PH90

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			250	Vrms
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.11	0.16	0.238	0.38	0.58	dB/ft
	0.36	0.52	0.78	1.25	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.033 lbs [14.97 g]

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316 Coax with 90 Deg. Clock PE34730/PH90](#)



SMA Male Right Angle to MMCX Plug Right Angle
Cable Using RG316 Coax with 90 Deg. Clock

RF Cable Assemblies Technical Data Sheet

PE34730/PH90

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	MMCX Plug Right Angle
Specification	MIL-STD-348A	BS EN 122340
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Gold
Body Plating Specification	100 µin minimum	3 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	
Hex Size	5/16 inch	
Torque	3 in-lbs [0.34 Nm]	

Environmental Specifications

Temperature

Operating Range -55 to +155 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316 Coax with 90 Deg. Clock PE34730/PH90](#)



SMA Male Right Angle to MMCX Plug Right Angle
Cable Using RG316 Coax with 90 Deg. Clock

RF Cable Assemblies Technical Data Sheet

PE34730/PH90

How to Order

Part Number Configuration:

PE34730/PH90

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34730/PH90-12 = 12 inches long cable
PE34730/PH90-100cm = 100 cm long cable

SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316 Coax with 90 Deg. Clock from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316 Coax with 90 Deg. Clock PE34730/PH90](https://www.pasternack.com/sma-male-right-angle-to-mmcx-plug-right-angle-cable-using-rg316-with-90-deg.-clock-pe34730-ph90-p.aspx)

URL: <https://www.pasternack.com/sma-male-right-angle-to-mmcx-plug-right-angle-cable-using-rg316-with-90-deg.-clock-pe34730-ph90-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34730/PH90 CAD Drawing

SMA Male Right Angle to MMCX Plug Right Angle Cable
Using RG316 Coax with 90 Deg. Clock

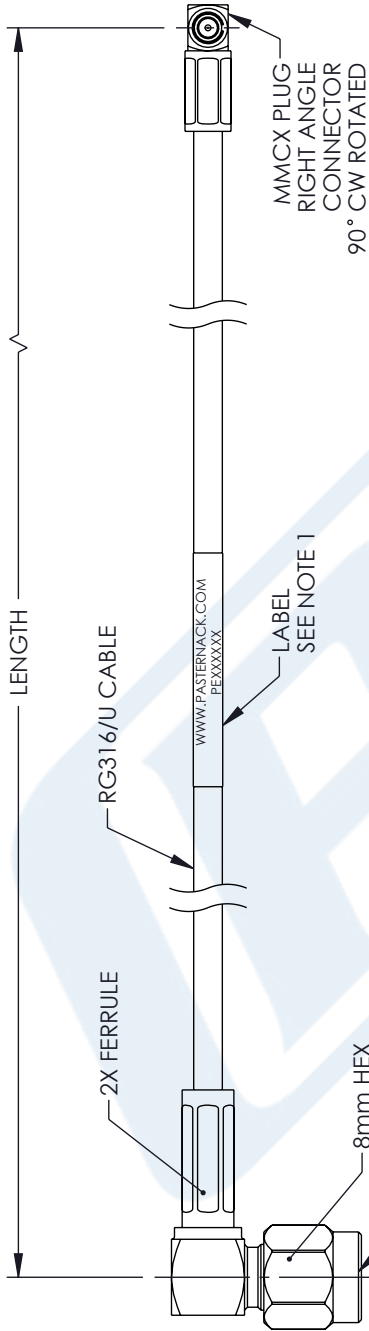

NOTES:

- CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES
FROM EACH CONNECTOR.
- CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PASTERNAK an INFINITE brand		
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		SCALE: NONE SHEET: 1 OF 1
DESCRIPTION: SMA MALE RIGHT ANGLE TO MMCX PLUG RIGHT ANGLE CABLE USING RG316 COAX WITH 90 DEG. CLOCK		REV: A
SIZE: A	CAGE CODE: 53919	DRAWN BY: KGLEBOVA ITEM NO.: PE34730/PH90

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES: .X = ±.2 [.5] .XX = ±.02 [.5] .XXX = ±.005 [.13]	FRACTIONS: ± 1/32 ANGLES ± 1°
CABLE LENGTH TOLERANCES: ≤12 [305] = ±1 [25] / -0 >12 [305] ≤ 60 [1524] = ±2 [51] / -0 >60 [1524] ≤ 120 [3048] = ±4 [102] / -0 >120 [3048] ≤ 300 [7620] = ±6 [152] / -0 >300 [7620] = ±5% / -0	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.	