



SMA Male to SMA Male Right Angle Low Loss Cable
24 Inch Length Using PE-P141 Coax, RoHS

TECHNICAL DATA SHEET

PE351-24

Configuration

Connector 1	SMA Male
Connector 2	SMA Male Right Angle
Cable Type	PE-P141

Electrical Specifications

Frequency Range	DC to 18 GHz
Impedance	50 Ohms
Maximum VSWR	1.4:1
Maximum Insertion Loss	1 dB
Velocity of Propagation	70 %
RF Shielding	110 dB

Typical Performance by Frequency

Frequency 1

Frequency	6 GHz
VSWR	1.15:1
Insertion Loss,	0.8 dB

Frequency 2

Frequency	12 GHz
VSWR	1.3:1
Insertion Loss	1.2 dB

Frequency 3

Frequency	18 GHz
VSWR	1.4:1
Insertion Loss	1.5 dB

Mechanical Specifications

Temperature

Temperature Operating Range	-55 to +200 deg C
-----------------------------	-------------------

Size

Length	24 in [609.6 mm]
Diameter	0.74 in [18.8 mm]
Cable Color	Blue
One Time Minimum Bend Radius	0.8 in [20.32 mm]

Cable

Cable Type	PE-P141
Inner Conductor Type	Solid
Cable Inner Conductor	Copper Clad Steel, Silver
No of Shields	2
Cable Outer Conductor	Copper, Silver
Dielectric Type	PTFE

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Low Loss Cable 24 Inch Length Using PE-P141 Coax, RoHS PE351-24](#)



SMA Male to SMA Male Right Angle Low Loss Cable 24 Inch Length Using PE-P141 Coax, RoHS

TECHNICAL DATA SHEET

PE351-24

Jacket Material	FEP
Jacket Diameter	0.163 in [4.14 mm]
Connector 1	
Type	SMA Male
Configuration	Straight
Inner Conductor Material and Plating	Beryllium Copper, Gold
Coupling Nut Material and Plating	Passivated Stainless Steel
Hex Size	5/16 inch
Torque	8 in-lbs [0.9 Nm]
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	PTFE
Connector 2	
Type	SMA Male Right Angle
Configuration	Right Angle
Inner Conductor Material and Plating	Beryllium Copper, Gold
Coupling Nut Material and Plating	Passivated Stainless Steel
Hex Size	5/16 inch
Torque	8 in-lbs [0.9 Nm]
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
Notes:	
• Values at +25 °C, sea level	

SMA Male to SMA Male Right Angle Low Loss Cable 24 Inch Length Using PE-P141 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Low Loss Cable 24 Inch Length Using PE-P141 Coax, RoHS PE351-24](http://www.pasternack.com/sma-male-sma-male-pe-p141-cable-assembly-pe351-24-p.aspx)

URL: <http://www.pasternack.com/sma-male-sma-male-pe-p141-cable-assembly-pe351-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE351-24 CAD Drawing

SMA Male to SMA Male Right Angle Low Loss Cable
24 Inch Length Using PE-P141 Coax, RoHS

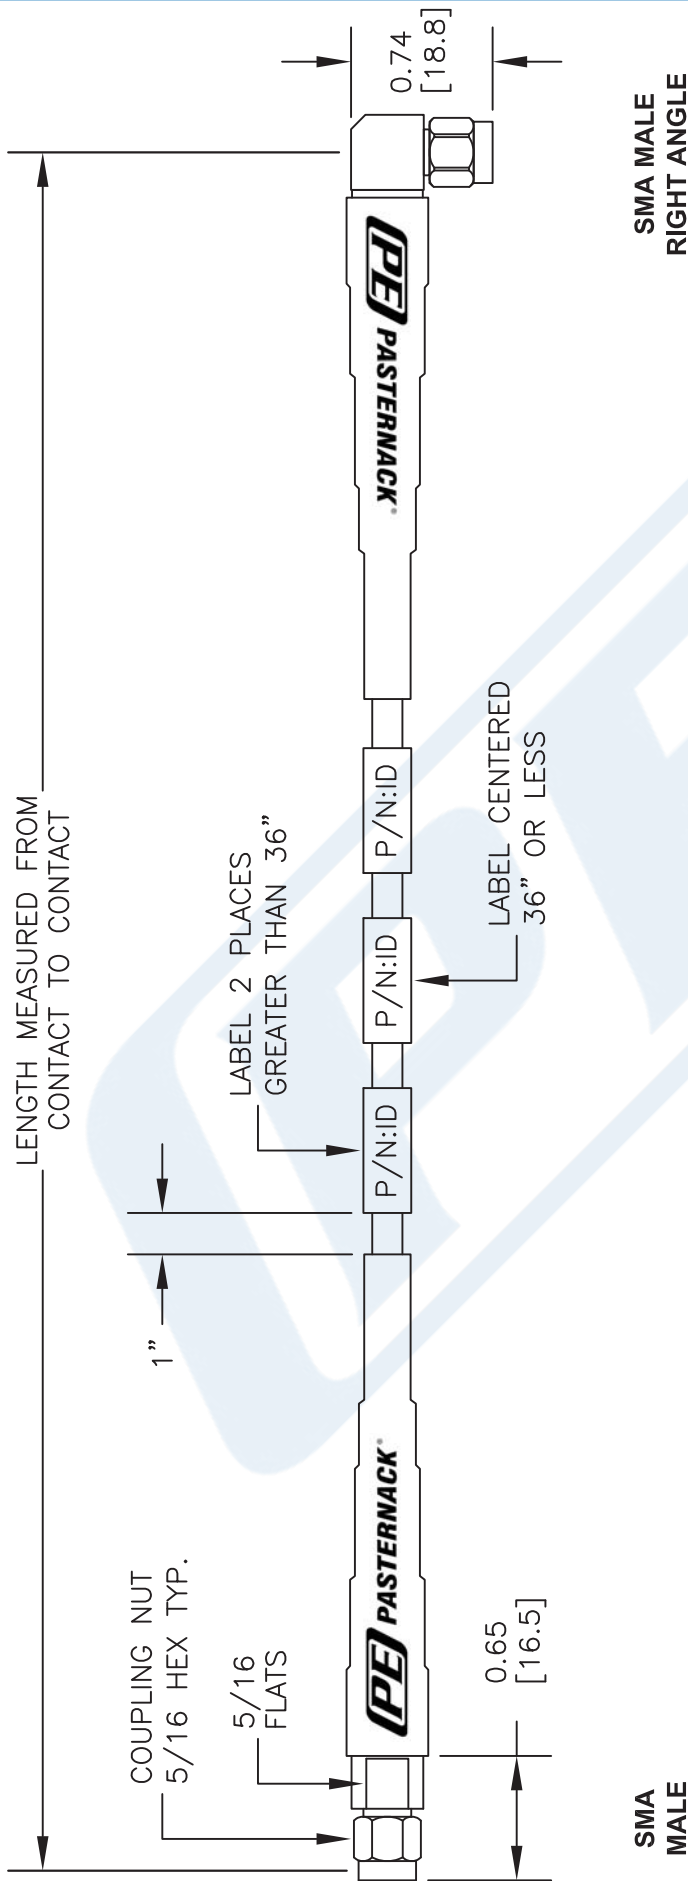

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
PE3	zzz yv - xx uu	-12	12"	-25CM	25Cm
00 - 99999	LF = RoHS Compliant < Blank > = Standard	-24	24"	-50CM	50Cm
	Note: LF applies only to RF cables	-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-xx	Custom Length	-xxCM	Custom Length

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE351

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919	CAD FILE 041814	SCALE N/A	SIZE A	2233
----------------	-----------------	-----------	--------	------