




## SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable 6 Inch Length Using PE-SR047FL Coax

### RF Cable Assemblies Technical Data Sheet

PE35112-6


#### Configuration

- Connector 1: SMA Female 4 Hole Flange
- Connector 2: SMA Female 4 Hole Flange
- Cable Type: PE-SR047FL



#### Features

- Max Frequency 12.4 GHz

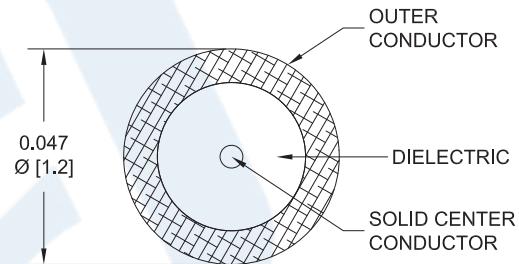

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE35112-6 SMA female 4 hole flange to SMA female 4 hole flange 6 inch cable using PE-SR047FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a female to female gender configuration with 50 ohm formable PE-SR047FL coax. The PE35112-6 SMA female to SMA female cable assembly operates to 12.4 GHz. Our RF cable assembly with SMA 4 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable 6 Inch Length Using PE-SR047FL Coax PE35112-6](#)



## SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable 6 Inch Length Using PE-SR047FL Coax

### RF Cable Assemblies Technical Data Sheet

**PE35112-6**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.4:1	
Capacitance	32 [104.99]			pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	3	5	10	12.4	GHz
Insertion Loss (Typ.)	0.379	0.524	0.629	0.839	0.92	dB

#### Mechanical Specifications

##### Cable Assembly

Length\* 6 in [152.4 mm]

Weight 0.015 lbs [6.8 g]

##### Cable

Cable Type PE-SR047FL  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Shield Layer 1 Tinned Copper Braid  
Jacket Diameter 0.047 in [1.19 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Female 4 Hole Flange	SMA Female 4 Hole Flange
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable 6 Inch Length Using PE-SR047FL Coax PE35112-6](#)



## SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable 6 Inch Length Using PE-SR047FL Coax

### RF Cable Assemblies Technical Data Sheet

PE35112-6

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

#### How to Order

Part Number Configuration:



Example: PE35112-12 = 12 inches long cable  
PE35112-100cm = 100 cm long cable

SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable 6 Inch Length Using PE-SR047FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable 6 Inch Length Using PE-SR047FL Coax PE35112-6](#)

URL: <https://www.pasternack.com/sma-female-sma-female-pe-sr047fl-cable-assembly-pe35112-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE35112-6 CAD Drawing**  
 SMA Female 4 Hole Flange to SMA Female 4 Hole Flange  
 Cable 6 Inch Length Using PE-SR047FL Coax

REVISIONS				
REV.	DESCRIPTION	DATE	APPROVED	
A	PCR PE35112-6 20200827	09/15/20	SRAUTUS	

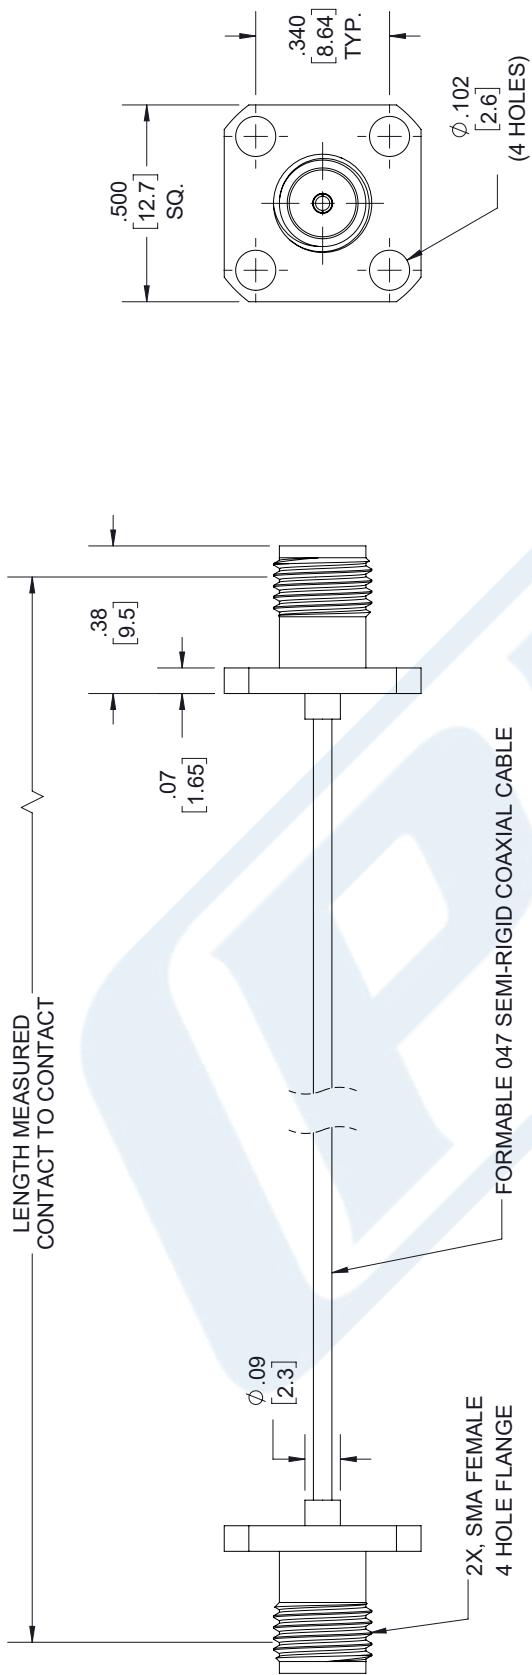

**LENGTH TOLERANCE**

LENGTH(INCH)	TOLERANCE(INCH)
2 - 5.9	±.125
6 - 11.9	±.187
12 - 23.9	±.250
24 - 35.9	±.313

<b>PE PASTERNACK</b> an INFINITE brand	
THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNACK CORPORATION ALL RIGHTS RESERVED.	SHEET 1 OF 1
Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920   1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com	SCALE N/A
SIZE A	ITEM NO. PE35112
REV A	

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS TOLERANCES:	
X = ± .2 [5.08]	FRACTIONS XX = ± .02 [ .51 ]
XXX = ± .005 [ .13 ]	± 1/32
CABLE LENGTH(L) TOLERANCES:	ANGLES ± 1°
L ≤ 12 [305] = +1 [25] / -0	L ≤ 12 [305] < L ≤ 60 [1524] = +2 [51] / -0
12 [305] < L ≤ 120 [3048] = +4 [102] / -0	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +5%L / -0	300 [7620] < L = +5%L / -0
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE  
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION, CONTRARY TO U.S. LAW PROHIBITED.