



SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE35112LF

Configuration

- Connector 1: SMA Female 4 Hole Flange
- Connector 2: SMA Female 4 Hole Flange
- Cable Type: PE-SR047FL

Features

- Max Frequency 12.4 GHz


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE35112LF SMA female 4 hole flange to SMA female 4 hole flange cable using PE-SR047FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a female to female gender configuration with 50 ohm formable PE-SR047FL coax. The PE35112LF SMA female to SMA female cable assembly operates to 12.4 GHz. Our RF cable assembly with SMA 4 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

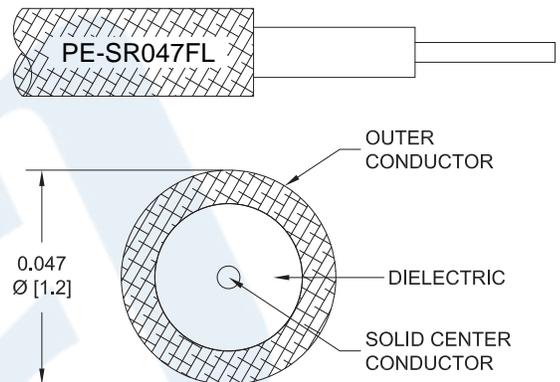

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS PE35112LF](#)



SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE35112LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.4:1	
Capacitance		32 [104.99]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	3	5	10	12.4	GHz
Insertion Loss (Typ.)	0.36	0.65	0.86	1.28	1.44	dB/ft
	1.18	2.13	2.82	4.2	4.72	

Mechanical Specifications

Cable Assembly

Diameter	0.5 in [12.7 mm]
Weight	0.019 lbs [8.62 g]

Cable

Cable Type	PE-SR047FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Diameter	0.047 in [1.19 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS PE35112LF](#)



SMA Female 4 Hole Flange to SMA Female 4 Hole
Flange Cable Using PE-SR047FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE35112LF

Connectors

Description	Connector 1	Connector 2
Type	SMA Female 4 Hole Flange	SMA Female 4 Hole Flange
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204, Type II, Class 2	MIL-G-45204, Type II, Class 2
Dielectric Type	Teflon	Teflon
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	MIL-G-45204	MIL-G-45204

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS PE35112LF](#)



SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE35112LF

How to Order

Part Number Configuration:

PE35112LF - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE35112LF-12 = 12 inches long cable
PE35112LF-100cm = 100 cm long cable

SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS PE35112LF](#)


URL: <https://www.pasternack.com/sma-female-sma-female-pe-sr047fl-cable-assembly-pe35112lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE35112LF CAD Drawing

SMA Female 4 Hole Flange to SMA Female 4 Hole Flange Cable Using PE-SR047FL Coax, RoHS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PCR PE35112-6 20200827	09/15/20	SRAUTUS

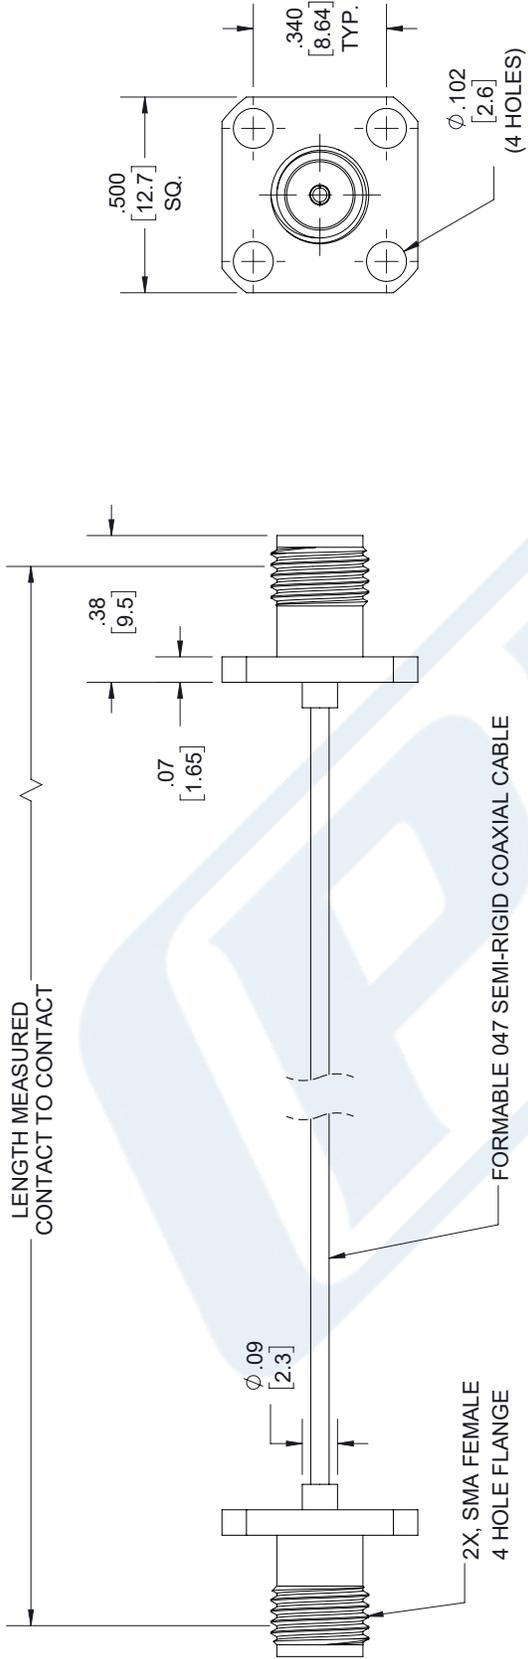

LENGTH TOLERANCE

LENGTH(INCH)	TOLERANCE(INCH)
2 - 5.9	±.125
6 - 11.9	±.187
12 - 23.9	±.250
24 - 35.9	±.313

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08] FRACTIONS ± 1/32
.XX = ±.02 [.51] ANGLES ± 1°
.XXX = ±.005 [.13]

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0
12 [305] < L ≤ 60 [1524] = +2 [51] / -0
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +5%L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PASTERNAK
an INFINITE brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	SLI	PE35112LF

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN ARE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET	1	OF	1
SCALE	N/A		

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.