

N Male to MHV Male Cable Using RG393 Coax

PE35296




Configuration

- Connector 1: N Male
- Connector 2: MHV Male
- Cable Type: RG393
- Coax Flex Type: Flexible

Features

- Max Frequency 300 MHz
- Double Shielded
- FEP Jacket

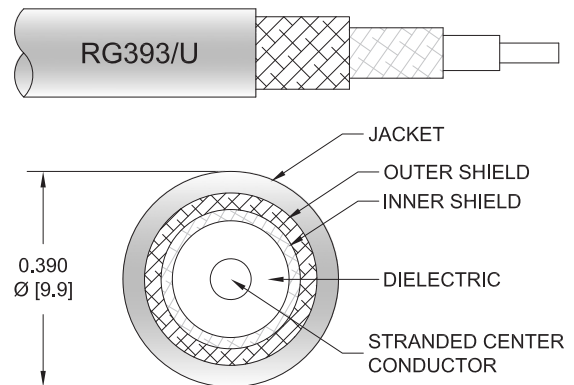

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE35296 type N male to MHV male cable using RG393 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to MHV cable assembly has a male to male gender configuration with 50 ohm flexible RG393 coax. The PE35296 type N male to MHV male cable assembly operates to 300 MHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR			1.4:1	
Capacitance		32 [104.99]		pF/ft [pF/m]

Specifications by Frequency

N Male to MHV Male Cable Using RG393 Coax



PE35296

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	50	100	250	300	MHz	
PE35296	Custom Lengths Available	Insertion Loss (Typ.)	0.013	0.021	0.03	0.033	dB/ft	
			0.05	0.07	0.1	0.11	dB/m	
PE35296-12	12 inch	Insertion Loss (Typ.)	0.22	0.23	0.23	0.24	dB	0.287
PE35296-24	24 inch	Insertion Loss (Typ.)	0.23	0.25	0.26	0.27	dB	0.451
PE35296-36	36 inch	Insertion Loss (Typ.)	0.24	0.27	0.29	0.3	dB	0.614
PE35296-60	60 inch	Insertion Loss (Typ.)	0.27	0.31	0.35	0.37	dB	0.94
PE35296-72	72 inch	Insertion Loss (Typ.)	0.28	0.33	0.38	0.4	dB	1.103

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.287 pounds
Additional Weight per Inch:	0.01359 pounds

Mechanical Specifications

Cable Assembly

Weight	0.287 lbs [130.18 g]
--------	----------------------

Cable

Cable Type	RG393
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.39 in [9.91 mm]

N Male to MHV Male Cable Using RG393 Coax



PE35296

Connectors

Description	Connector 1	Connector 2
Type	N Male	MHV Male
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:
Values at 25°C, sea level.

N Male to MHV Male Cable Using RG393 Coax



PE35296

Typical Performance Data

How to Order

Part Number Configuration:

PE35296

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE35296-12 = 12 inches long cable
PE35296-100cm = 100 cm long cable

N Male to MHV Male Cable Using RG393 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to MHV Male Cable Using RG393 Coax PE35296](#)

URL: <https://www.pasternack.com/n-male-to-mhv-male-cable-using-rg393-pe35296-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE35296 CAD Drawing
N Male to MHV Male Cable Using RG393 Coax

