

SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet



PE35568/HS

Configuration

- Connector 1: SMA Male
- Connector 2: SMB Jack
- Cable Type: RG316-DS

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 85 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket

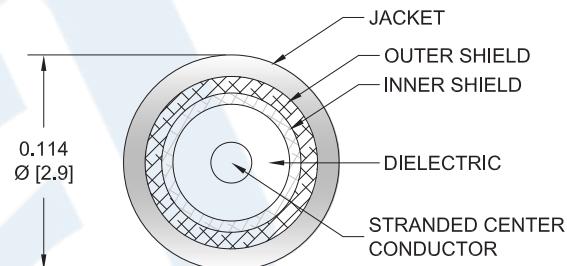

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE35568/HS SMA male to SMB jack cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMB cable assembly has a male to jack gender configuration with 50 ohm flexible RG316-DS coax. The PE35568/HS SMA male to SMB jack cable assembly operates to 3 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 85 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink PE35568/HS](#)



SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE35568/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	85			dB
Capacitance		28.96 [95.01]		pF/ft [pF/m]
DC Resistance Inner Conductor		83.82 [275]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		5.33 [17.49]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			335	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.109	0.159	0.238	0.379	0.579	dB/ft
	0.36	0.52	0.78	1.24	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Weight 0.034 lbs [15.42 g]

Cable

Cable Type	RG316-DS
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.114 in [2.9 mm]
One Time Minimum Bend Radius	0.59 in [14.99 mm]
Repeated Minimum Bend Radius	1.57 in [39.88 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink PE35568/HS](#)

SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE35568/HS

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMB Jack
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in. Min
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in. Minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in minimum	
Hex Size	5/16 inch	
Torque	3 in-lbs [0.34 Nm]	

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink PE35568/HS](#)

SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink




RF Cable Assemblies Technical Data Sheet

PE35568/HS

How to Order

Part Number Configuration:

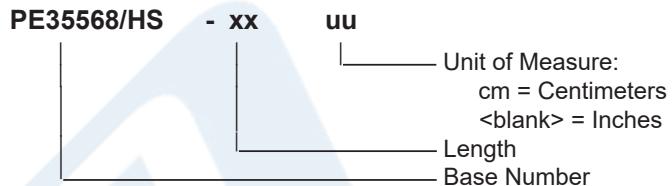

Example: PE35568/HS-12 = 12 inches long cable
PE35568/HS-100cm = 100 cm long cable

SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink PE35568/HS](#)

URL: <https://www.pasternack.com/sma-male-to-smb-jack-cable-using-rg316-ds-with-heatshrink-pe35568-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE35568/HS CAD Drawing

SMA Male to SMB Jack Cable Using RG316-DS Coax with HeatShrink

