


MCX Plug to MCX Plug Right Angle Cable Using RG178 Coax



PE36472


Configuration

- Connector 1: MCX Plug
- Connector 2: MCX Plug Right Angle
- Cable Type: RG178
- Coax Flex Type: Flexible



Features

- Max Frequency 3 GHz
- 69.5% Phase Velocity
- FEP Jacket

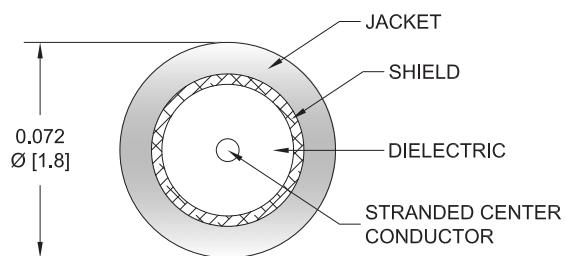

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE36472 MCX plug to MCX plug right angle cable using RG178 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to MCX cable assembly has a plug to plug gender configuration with 50 ohm flexible RG178 coax. The PE36472 MCX plug to MCX plug cable assembly operates to 3 GHz. The right angle MCX interface on the RG178 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			170	Vrms

Specifications by Frequency

MCX Plug to MCX Plug Right Angle Cable Using RG178 Coax



PE36472

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	3000	MHz	
PE36472	Custom Lengths Available	Insertion Loss (Typ.)	0.13	0.18	0.26	0.44	0.78	dB/ft	
			0.43	0.6	0.86	1.45	2.56	dB/m	
PE36472-6	6 inch	Insertion Loss (Typ.)	0.67	0.69	0.73	0.82	0.99	dB	0.014
PE36472-9	9 inch	Insertion Loss (Typ.)	0.7	0.74	0.8	0.93	1.19	dB	0.015
PE36472-12	12 inch	Insertion Loss (Typ.)	0.73	0.78	0.86	1.04	1.38	dB	0.016
PE36472-24	24 inch	Insertion Loss (Typ.)	0.86	0.96	1.12	1.48	2.16	dB	0.022
PE36472-36	36 inch	Insertion Loss (Typ.)	0.99	1.14	1.38	1.92	2.94	dB	0.027

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.4 dB
 Loss due to Connector 2: 0.2 dB
 Base Weight: 0.016 pounds
 Additional Weight per Inch: 0.00042 pounds

Mechanical Specifications

Cable Assembly

Weight 0.016 lbs [7.26 g]

Cable

Cable Type RG178
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.072 in [1.83 mm]
 Repeated Minimum Bend Radius 0.393 in [9.98 mm]

Connectors

Description	Connector 1	Connector 2
Type MCX Plug		MCX Plug Right Angle
Specification		CECC 22220
Impedance 50 Ohms		50 Ohms
Configuration Straight		Right Angle
Contact Material and Plating Brass, Gold		Brass, Gold
Contact Plating Specification 30 μ in minimum		30 μ in minimum
Dielectric Type PTFE		PTFE
Body Material and Plating Brass, Nickel		Brass, Nickel
Body Plating Specification 2.5 μ in minimum		100 μ in minimum

MCX Plug to MCX Plug Right Angle Cable Using RG178 Coax



PE36472

Environmental Specifications

Operating Range Temperature

-40 to +60 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:

Values at 25°C, sea level.

Typical Performance Data

How to Order

Part Number Configuration:

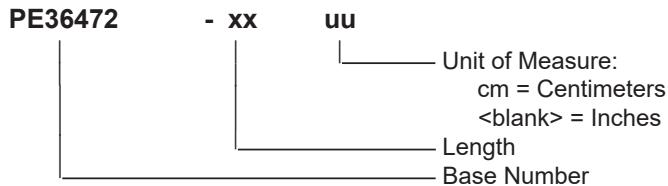

Example: PE36472-12 = 12 inches long cable
PE36472-100cm = 100 cm long cable

MCX Plug to MCX Plug Right Angle Cable Using RG178 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug to MCX Plug Right Angle Cable Using RG178 Coax PE36472](#)

URL: <https://www.pasternack.com/mcx-plug-to-mcx-plug-cable-using-rg178-pe36472-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE36472 CAD Drawing

MCX Plug to MCX Plug Right Angle Cable Using RG178 Coax

