



SMA Male Right Angle to SMB Plug
Right Angle Cable Using RG188 Coax

RF Cable Assemblies Technical Data Sheet

PE3676

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMB Plug Right Angle
- Cable Type: RG188

Features

- Max Frequency 3 GHz
- PTFE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3676 SMA male right angle to SMB plug right angle cable using RG188 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMB cable assembly has a male to plug gender configuration with 50 ohm flexible RG188 coax. The PE3676 SMA male to SMB plug cable assembly operates to 3 GHz. The right angle SMA and right angle SMB interfaces on the RG188 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Dielectric Withstanding Voltage (AC)			750	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	400					MHz
Insertion Loss (Typ.)	0.2					dB/ft
	0.66					dB/m

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMB Plug Right Angle Cable Using RG188 Coax PE3676](#)



SMA Male Right Angle to SMB Plug
Right Angle Cable Using RG188 Coax

RF Cable Assemblies Technical Data Sheet

PE3676

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.039 lbs [17.69 g]

Cable

Cable Type RG188
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Silver Plated Copper Braid
Jacket Material PTFE, White
Jacket Diameter 0.11 in [2.79 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMB Plug Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50µ in. minimum	30µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100µ in. minimum	100µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100µ in. minimum	100µ in. minimum
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMB Plug Right Angle Cable Using RG188 Coax PE3676](#)



SMA Male Right Angle to SMB Plug Right Angle Cable Using RG188 Coax

RF Cable Assemblies Technical Data Sheet

PE3676

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

How to Order

Part Number Configuration:

PE3676

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3676-12 = 12 inches long cable
PE3676-100cm = 100 cm long cable

SMA Male Right Angle to SMB Plug Right Angle Cable Using RG188 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMB Plug Right Angle Cable Using RG188 Coax PE3676](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-smb-plug-cable-using-rg188-pe3676-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3676 CAD Drawing

SMA Male Right Angle to SMB Plug Right Angle Cable Using RG188 Coax

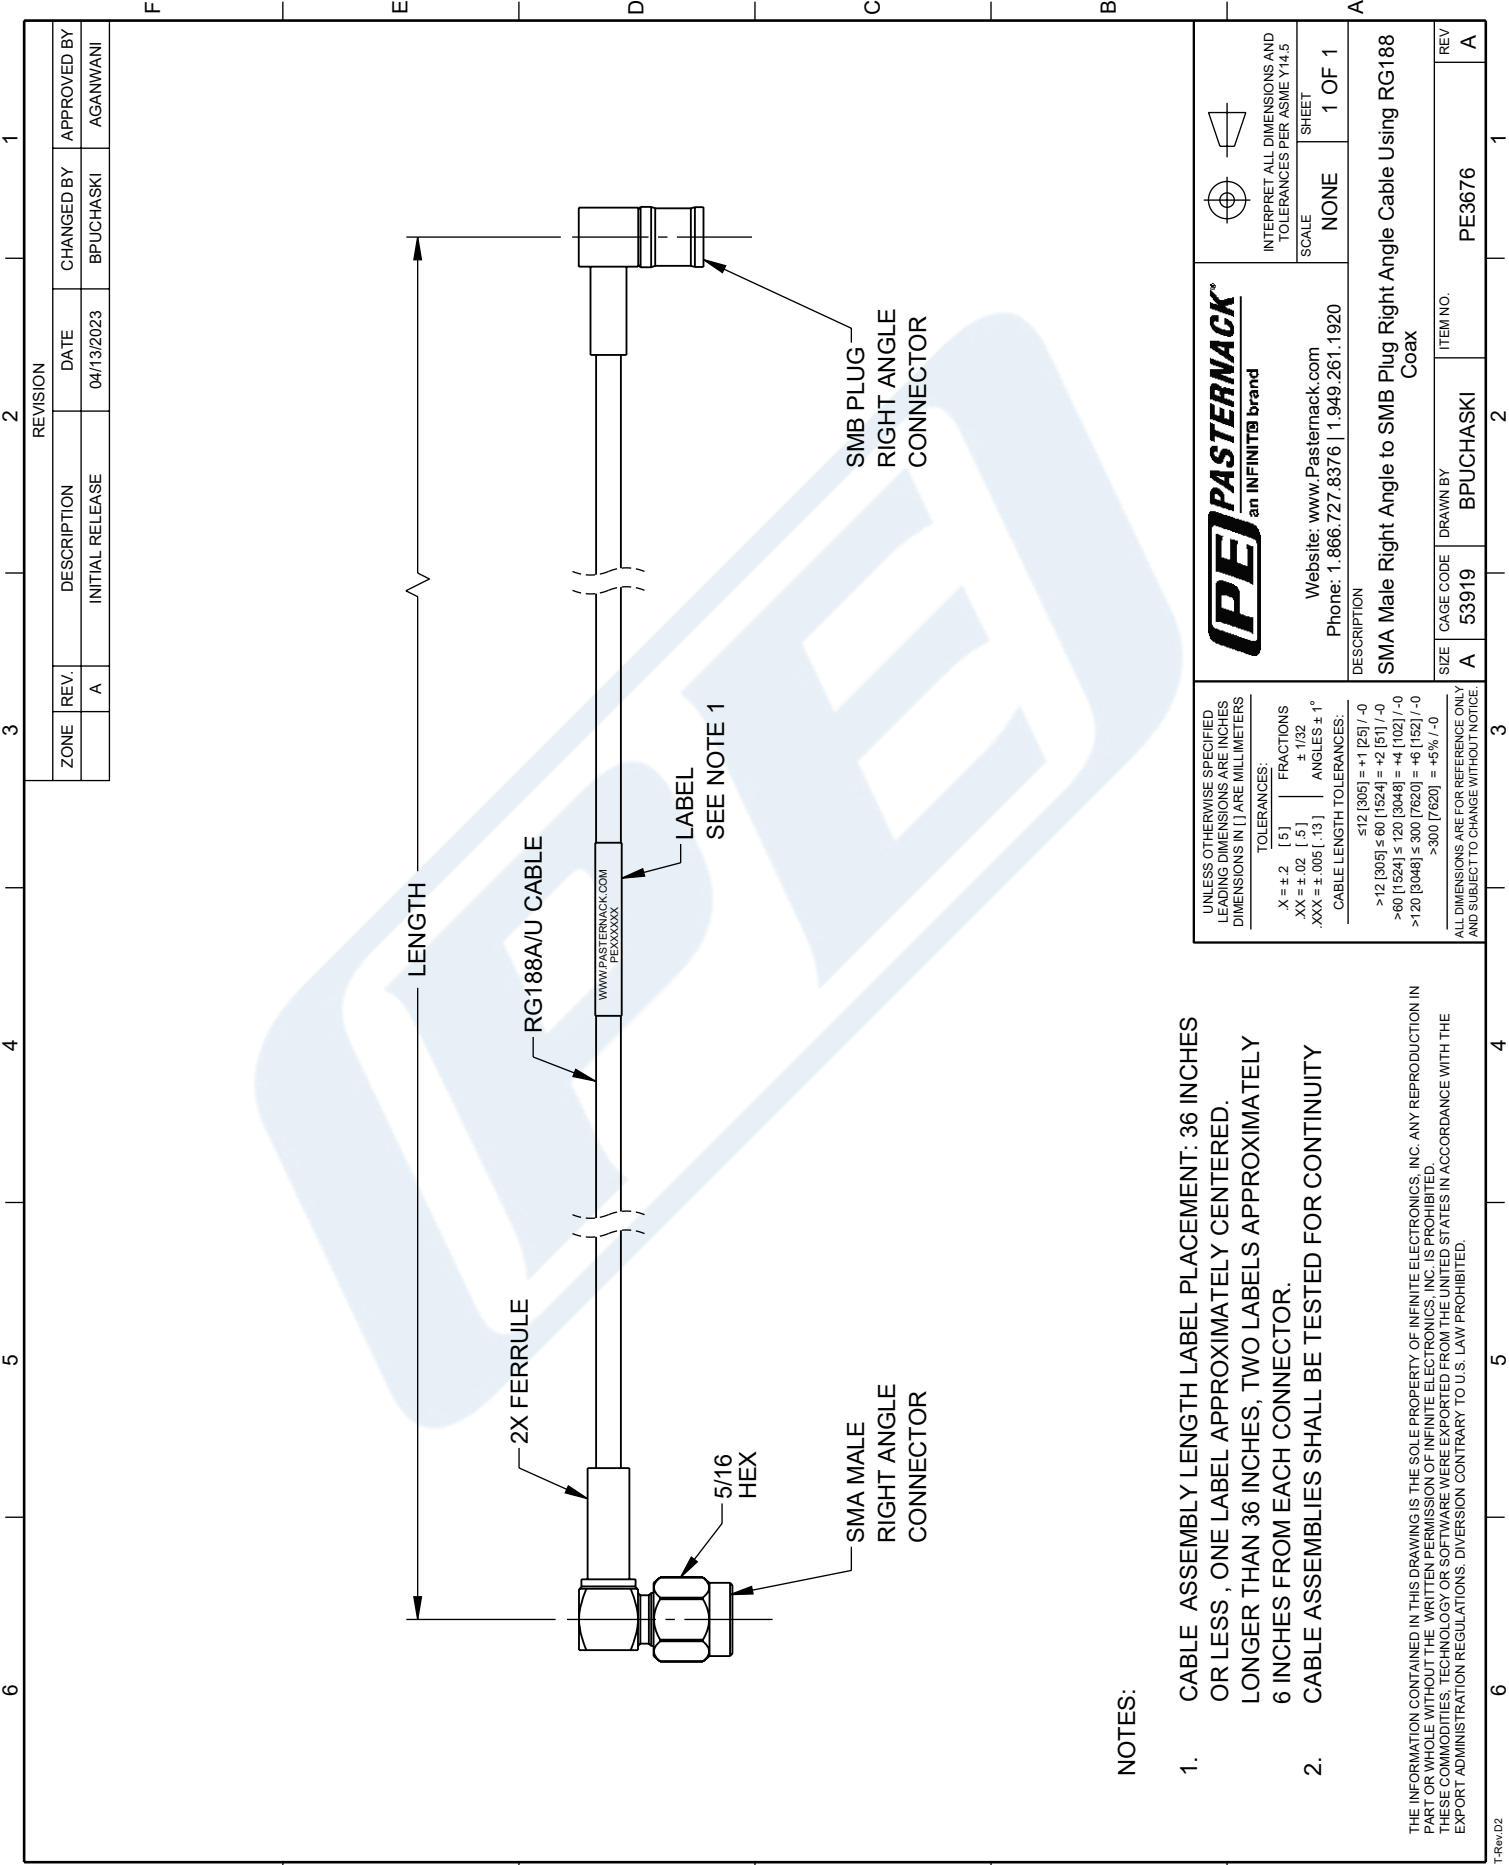

REVISION			
ZONE	REV.	DESCRIPTION	DATE
	A	INITIAL RELEASE	04/13/2023
			CHANGED BY
			APPROVED BY
			AGANWANI

 PASTERNAK an INFINITE brand			
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
DESCRIPTION SMA Male Right Angle to SMB Plug Right Angle Cable Using RG188 Coax		SCALE NONE	SHEET 1 OF 1
SIZE A	CAGE CODE 53919	DRAWN BY BPUCHASKI	ITEM NO. PE3676
			REV A