



SMA Male Right Angle to MMCX Plug Right Angle
Cable Using RG316-DS Coax

RF Cable Assemblies Technical Data Sheet


PE36970

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: MMCX Plug Right Angle
- Cable Type: RG316-DS

Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

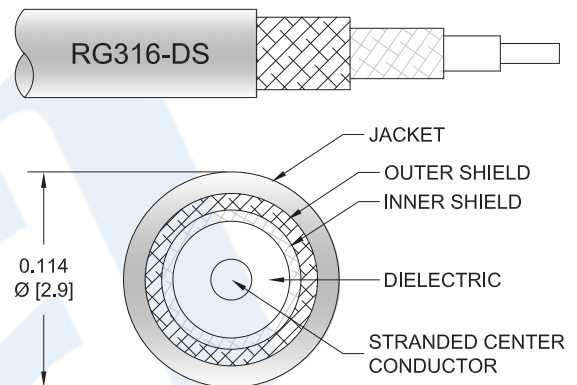

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE36970 SMA male right angle to MMCX plug right angle cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to MMCX cable assembly has a male to plug gender configuration with 50 ohm flexible RG316-DS coax. The PE36970 SMA male to MMCX plug cable assembly operates to 3 GHz. The right angle SMA and right angle MMCX interfaces on the RG316-DS cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316-DS Coax PE36970](#)



SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316-DS Coax

RF Cable Assemblies Technical Data Sheet

PE36970

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			250	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.082	0.128	0.194	0.29	0.535	dB/ft
	0.27	0.42	0.64	0.95	1.76	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.032 lbs [14.51 g]

Cable

Cable Type RG316-DS
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.114 in [2.9 mm]
 One Time Minimum Bend Radius 0.59 in [14.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316-DS Coax PE36970](#)



SMA Male Right Angle to MMCX Plug Right Angle
Cable Using RG316-DS Coax

RF Cable Assemblies Technical Data Sheet

PE36970

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	MMCX Plug Right Angle
Specification	MIL-STD-348A	BS EN 122340
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50µ in. minimum	30µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Gold
Body Plating Specification	100µ in. minimum	3µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100µ in. minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316-DS Coax PE36970](#)



SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316-DS Coax

RF Cable Assemblies Technical Data Sheet

PE36970

How to Order

Part Number Configuration:

PE36970

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE36970-12 = 12 inches long cable
PE36970-100cm = 100 cm long cable

SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316-DS Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to MMCX Plug Right Angle Cable Using RG316-DS Coax PE36970](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-mmcx-plug-cable-using-rg316-ds-pe36970-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

