



TNC Male to TNC Female Cable Using RG400 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3767LF/HS

Configuration

- Connector 1: TNC Male
- Connector 2: TNC Female
- Cable Type: RG400

Features

- 70% Phase Velocity
- Double Shielded
- FEP Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3767LF/HS TNC male to TNC female cable using RG400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to female gender configuration with 50 ohm flexible RG400 coax. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
Capacitance		32 [104.99]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Weight 0.103 lbs [46.72 g]

Cable

Cable Type	RG400
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	2

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Female Cable Using RG400 Coax with HeatShrink, LF Solder PE3767LF/HS](#)



TNC Male to TNC Female Cable Using RG400 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3767LF/HS

Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.195 in [4.95 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male	TNC Female
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	30 μ in minimum	
Dielectric Type	PTFE	
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in minimum	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Female Cable Using RG400 Coax with HeatShrink, LF Solder PE3767LF/HS](#)



TNC Male to TNC Female Cable Using RG400 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3767LF/HS

How to Order

Part Number Configuration:



Example: PE3767LF/HS-12 = 12 inches long cable
PE3767LF/HS-100cm = 100 cm long cable

TNC Male to TNC Female Cable Using RG400 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Female Cable Using RG400 Coax with HeatShrink, LF Solder PE3767LF/HS](#)


URL: <https://www.pasternack.com/tnc-male-to-tnc-female-cable-using-rg400-with-heatshrink-lf-solder-pe3767lf-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3767LF/HS CAD Drawing

TNC Male to TNC Female Cable Using RG400 Coax with HeatShrink, LF Solder

ZONE	REV.	DESCRIPTION	REVISION	DATE	CHANGED BY	APPROVED BY
	A	initial release		01/25/2023	BPUCHASKI	AGANWANI

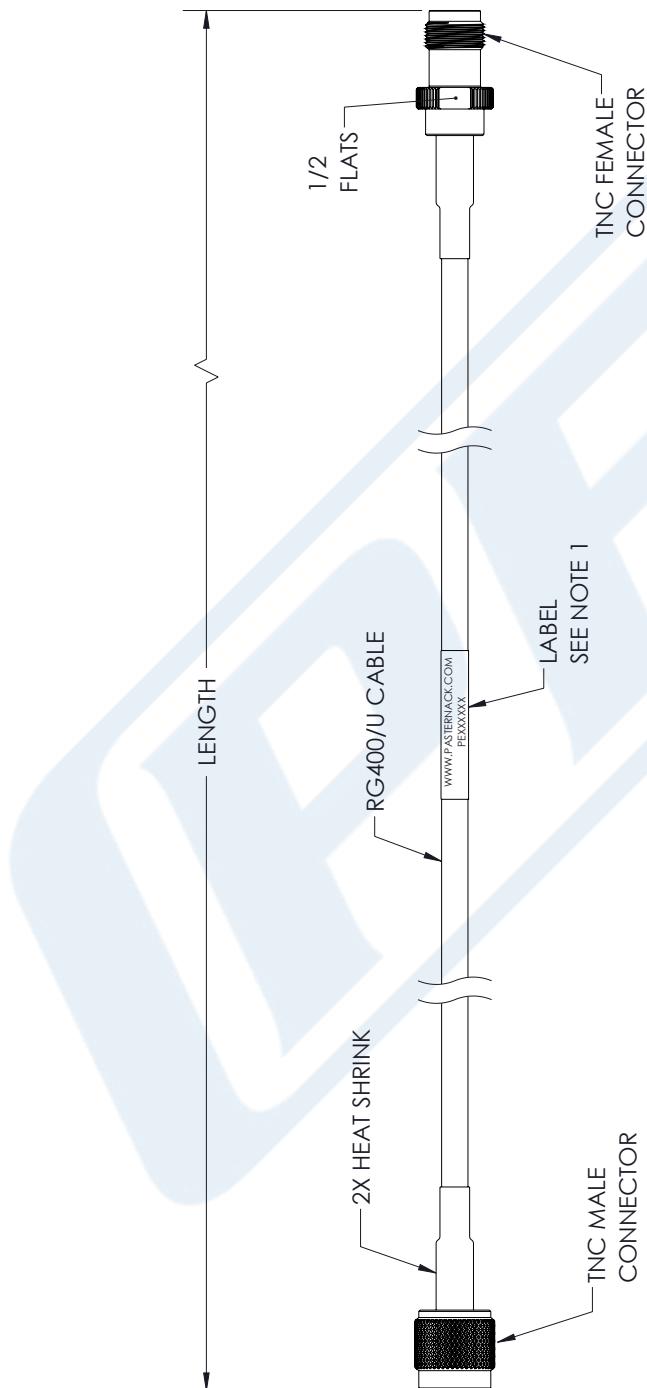

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS , ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS , ONE LABEL APPROXIMATELY CENTERED. LONGER

2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY
THAN 36 INCHES, TWO LABELS APPROXIMATELY 8 INCHES
FROM EACH CONNECTOR.

 PASTERNACK® an INFINITI® brand												
UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SHEET										
TOLERANCES: <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>$X = \pm 2$</td> <td>$[5]$</td> <td>FRACTIONS</td> </tr> <tr> <td>$.005 = \pm .02$</td> <td>$[.13]$</td> <td>± 152</td> </tr> <tr> <td colspan="2">$XXX = \pm 0.005$</td> <td>ANGLES $\pm 1^\circ$</td> </tr> </table>		$X = \pm 2$	$[5]$	FRACTIONS	$.005 = \pm .02$	$[.13]$	± 152	$XXX = \pm 0.005$		ANGLES $\pm 1^\circ$	DESCRIPTION Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920 PHONE	
$X = \pm 2$	$[5]$	FRACTIONS										
$.005 = \pm .02$	$[.13]$	± 152										
$XXX = \pm 0.005$		ANGLES $\pm 1^\circ$										
TOLERANCES: <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>$X = \pm 2$</td> <td>$[5]$</td> <td>FRACTIONS</td> </tr> <tr> <td>$.005 = \pm .02$</td> <td>$[.13]$</td> <td>± 152</td> </tr> <tr> <td colspan="2">$XXX = \pm 0.005$</td> <td>ANGLES $\pm 1^\circ$</td> </tr> </table>		$X = \pm 2$	$[5]$	FRACTIONS	$.005 = \pm .02$	$[.13]$	± 152	$XXX = \pm 0.005$		ANGLES $\pm 1^\circ$	CABLE LENGTH TOLERANCES: ± 120 [305] = ± 110 [280] / $-\pm 130$ [330]	
$X = \pm 2$	$[5]$	FRACTIONS										
$.005 = \pm .02$	$[.13]$	± 152										
$XXX = \pm 0.005$		ANGLES $\pm 1^\circ$										

LF Solder				REV A
SIZE A	CAGE CODE 53919	DRAWN BY BPUCHASKI	ITEM NO. PE3767LF/HS	