

## MCX Plug Right Angle to SMA Female Bulkhead Cable Using RG316-DS Coax with HeatShrink




### PE38772/HS

#### Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: SMA Female Bulkhead
- Cable Type: RG316-DS
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

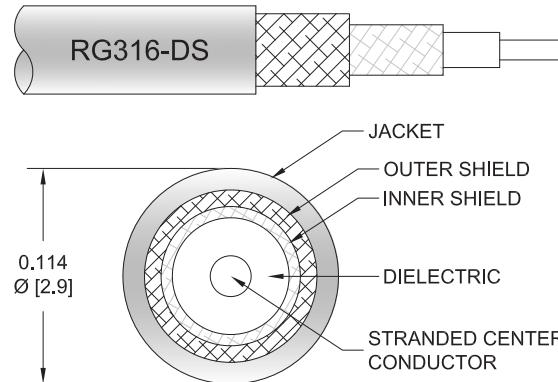

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE38772/HS MCX plug right angle to SMA female bulkhead cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to SMA cable assembly has a plug to female gender configuration with 50 ohm flexible RG316-DS coax. The PE38772/HS MCX plug to SMA female cable assembly operates to 3 GHz. The right angle MCX interface on the RG316-DS cable allows for easier connections in tight spaces. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR		1.4:1		
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

#### Specifications by Frequency

## MCX Plug Right Angle to SMA Female Bulkhead Cable Using RG316-DS Coax with HeatShrink



### PE38772/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	3000	MHz	
PE38772/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.08	0.13	0.194	0.29	0.535	dB/ft	
			0.27	0.42	0.64	0.96	1.76	dB/m	
PE38772/HS-6	6 inch	Insertion Loss (Typ.)	0.35	0.37	0.4	0.45	0.57	dB	0.021
PE38772/HS-12	12 inch	Insertion Loss (Typ.)	0.39	0.43	0.5	0.59	0.84	dB	0.028
PE38772/HS-24	24 inch	Insertion Loss (Typ.)	0.47	0.56	0.69	0.88	1.37	dB	0.043
PE38772/HS-36	36 inch	Insertion Loss (Typ.)	0.55	0.69	0.89	1.17	1.91	dB	0.057
PE38772/HS-48	48 inch	Insertion Loss (Typ.)	0.63	0.82	1.08	1.46	2.44	dB	0.071

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.028 pounds

Additional Weight per Inch: 0.00117 pounds

### Mechanical Specifications

#### Cable Assembly

Weight 0.028 lbs [12.7 g]

#### Cable

Cable Type RG316-DS  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper Clad Steel, Silver  
 Dielectric Type PTFE  
 Number of Shields 2  
 Shield Layer 1 Silver Plated Copper Braid  
 Shield Layer 2 Silver Plated Copper Braid  
 Jacket Material FEP, Tan  
 Jacket Diameter 0.114 in [2.9 mm]  
 Repeated Minimum Bend Radius 0.6 in [15.24 mm]

### Connectors

Description	Connector 1	Connector 2
Type MCX Plug Right Angle		SMA Female Bulkhead
Impedance 50 Ohms		50 Ohms
Configuration Right Angle		Straight
Contact Material and Plating Beryllium Copper, Gold		
Contact Plating Specification QQ-C-530		
Dielectric Type Teflon		
Body Material and Plating Brass, Nickel		Brass, Nickel
Body Plating Specification QQ-B-626		

## MCX Plug Right Angle to SMA Female Bulkhead Cable Using RG316-DS Coax with HeatShrink



### PE38772/HS

#### Environmental Specifications

**Compliance Certifications** (see product page for current document)

#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:



Example: PE38772/HS-12 = 12 inches long cable  
PE38772/HS-100cm = 100 cm long cable

MCX Plug Right Angle to SMA Female Bulkhead Cable Using RG316-DS Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMA Female Bulkhead Cable Using RG316-DS Coax with HeatShrink PE38772/HS](#)

URL: <https://www.pasternack.com/mcx-plug-right-angle-to-sma-female-bulkhead-cable-using-rg316-ds-with-heatshrink-pe38772-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE38772/HS CAD Drawing

MCX Plug Right Angle to SMA Female Bulkhead Cable Using RG316-DS Coax with HeatShrink

