


SMA Female to Straight Cut Lead Cable Using RG316 Coax

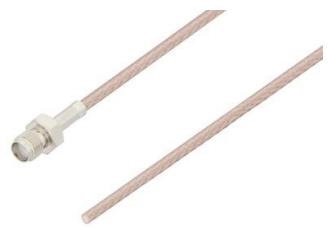



PE38988

Configuration

- Connector 1: SMA Female
- Connector 2: Straight Cut Lead
- Cable Type: RG316
- Coax Flex Type: Flexible

Features

- FEP Jacket

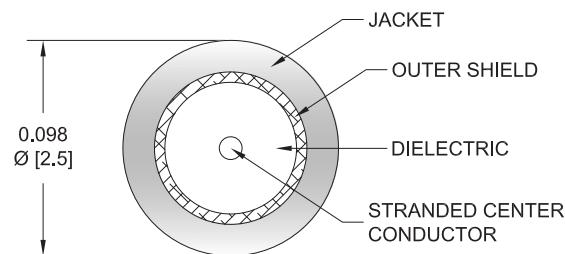

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE38988 50 ohm SMA female to straight cut lead cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.


Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Capacitance		32 [104.99]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly	
Weight	0.017 lbs [7.71 g]
Cable	
Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.098 in [2.49 mm]

SMA Female to Straight Cut Lead Cable Using RG316 Coax

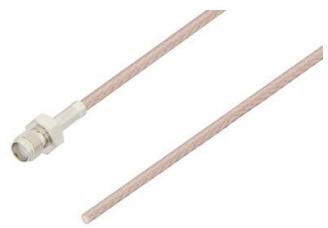**PE38988****Connectors**

Description	Connector 1	Connector 2
Type	SMA Female	Straight Cut Lead
Specification	MIL-STD-348	
Impedance	50 Ohms	0 Ohms
Configuration	Straight	Straight
Mating Cycles	100	
Contact Material and Plating	Beryllium Copper, Gold	
Dielectric Type	PTFE	
Outer Conductor Material and Plating	Brass, Nickel	
Body Material and Plating	Brass, Nickel	


Environmental Specifications**Compliance Certifications** (see product page for current document)**Plotted and Other Data**

Notes:

SMA Female to Straight Cut Lead Cable Using RG316 Coax

**PE38988****Typical Performance Data****How to Order**

Part Number Configuration:

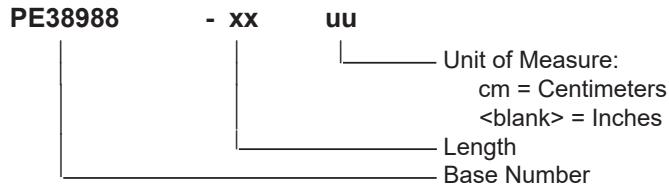

Example: PE38988-12 = 12 inches long cable
PE38988-100cm = 100 cm long cable

SMA Female to Straight Cut Lead Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to Straight Cut Lead Cable Using RG316 Coax PE38988](#)

URL: <https://www.pasternack.com/sma-female-to-straight-cut-lead-cable-using-rg316-pe38988-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE38988 CAD Drawing

SMA Female to Straight Cut Lead Cable Using RG316 Coax

