

## TNC Male to QN Male Right Angle Cable Using RG223 Coax

### PE39030




#### Configuration

- Connector 1: TNC Male
- Connector 2: QN Male Right Angle
- Cable Type: RG223
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

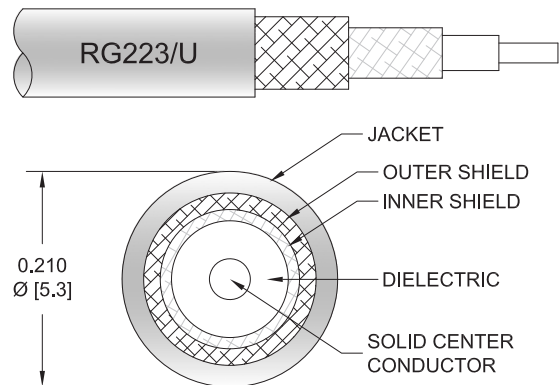

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE39030 TNC male to QN male right angle cable using RG223 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to QN cable assembly has a male to male gender configuration with 50 ohm flexible RG223 coax. The PE39030 TNC male to QN male cable assembly operates to 6 GHz. The right angle QN interface on the RG223 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

#### Specifications by Frequency

## TNC Male to QN Male Right Angle Cable Using RG223 Coax

### PE39030



Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	500	1000	2500	6000	MHz	
PE39030	Custom Lengths Available	Insertion Loss (Typ.)	0.09	0.13	0.21	0.36	dB/ft	
			0.3	0.43	0.69	1.19	dB/m	
PE39030-12	12 inch	Insertion Loss (Typ.)	0.23	0.28	0.39	0.59	dB	0.116
PE39030-24	24 inch	Insertion Loss (Typ.)	0.32	0.41	0.6	0.95	dB	0.148
PE39030-36	36 inch	Insertion Loss (Typ.)	0.41	0.54	0.81	1.31	dB	0.179
PE39030-60	60 inch	Insertion Loss (Typ.)	0.59	0.8	1.23	2.03	dB	0.241
PE39030-72	72 inch	Insertion Loss (Typ.)	0.68	0.93	1.44	2.39	dB	0.272

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
 Loss due to Connector 2:  $0.05 \times \text{SQRT}(\text{FGHz})$  dB  
 Base Weight: 0.116 pounds  
 Additional Weight per Inch: 0.00259 pounds

### Mechanical Specifications

#### Cable Assembly

Weight 0.116 lbs [52.62 g]

#### Cable

Cable Type RG223  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PE  
 Number of Shields 2  
 Shield Layer 1 Silver Plated Copper Braid  
 Shield Layer 2 Silver Plated Copper Braid  
 Jacket Material PVC, Black  
 Jacket Diameter 0.21 in [5.33 mm]  
 One Time Minimum Bend Radius 1 in [25.4 mm]

## TNC Male to QN Male Right Angle Cable Using RG223 Coax

**PE39030**



### Connectors

Description	Connector 1	Connector 2
Type	TNC Male	QN Male Right Angle
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	

### Environmental Specifications

Operating Range Temperature -40 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:  
Values at 25°C, sea level.

## TNC Male to QN Male Right Angle Cable Using RG223 Coax



### PE39030

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE39030**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE39030-12 = 12 inches long cable  
PE39030-100cm = 100 cm long cable

TNC Male to QN Male Right Angle Cable Using RG223 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to QN Male Right Angle Cable Using RG223 Coax PE39030](#)

URL: <https://www.pasternack.com/tnc-male-to-qn-male-cable-using-rg223-pe39030-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE39030 CAD Drawing
TNC Male to QN Male Right Angle Cable Using RG223 Coax

