

## SMA Male to Water Blue FAKRA Jack Cable Using RG174 Coax with HeatShrink




### PE39199Z/HS

#### Configuration

- Connector 1: SMA Male
- Connector 2: FAKRA Jack
- Cable Type: RG174
- Coax Flex Type: Flexible

#### Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

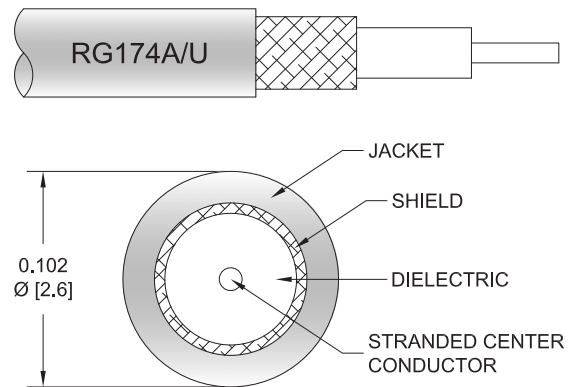

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE39199Z/HS SMA male to water blue FAKRA jack cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to FAKRA cable assembly has a male to jack gender configuration with 50 ohm flexible RG174 coax. The PE39199Z/HS SMA male to FAKRA jack cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.08 [101.97]		pF/ft [pF/m]

#### Specifications by Frequency

## SMA Male to Water Blue FAKRA Jack Cable Using RG174 Coax with HeatShrink



### PE39199Z/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	50	100	250	500	1000	MHz	
PE39199Z/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.04	0.08	0.14	0.21	0.32	dB/ft	
			0.14	0.28	0.45	0.7	1.05	dB/m	
PE39199Z/HS-12	12 inch	Insertion Loss (Typ.)	0.25	0.29	0.34	0.42	0.52	dB	0.028
PE39199Z/HS-24	24 inch	Insertion Loss (Typ.)	0.29	0.37	0.48	0.63	0.84	dB	0.037
PE39199Z/HS-36	36 inch	Insertion Loss (Typ.)	0.33	0.46	0.62	0.84	1.16	dB	0.046
PE39199Z/HS-48	48 inch	Insertion Loss (Typ.)	0.37	0.54	0.75	1.05	1.48	dB	0.055
PE39199Z/HS-72	72 inch	Insertion Loss (Typ.)	0.46	0.71	1.03	1.47	2.12	dB	0.073

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.028 pounds
Additional Weight per Inch:	0.00075 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.028 lbs [12.7 g]

#### Cable

Cable Type	RG174
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]

## SMA Male to Water Blue FAKRA Jack Cable Using RG174 Coax with HeatShrink



### PE39199Z/HS

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	FAKRA Jack
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Color		WB
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Gold
Contact Plating Specification	30 µin minimum	
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Nickel	Plastic
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	
Hex Size	5/16 inch	
Torque	3 in-lbs 0.34 Nm	

#### Environmental Specifications

Operating Range Temperature -40 to +80 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## SMA Male to Water Blue FAKRA Jack Cable Using RG174 Coax with HeatShrink



### PE39199Z/HS

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE39199Z/HS - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE39199Z/HS-12 = 12 inches long cable  
PE39199Z/HS-100cm = 100 cm long cable

SMA Male to Water Blue FAKRA Jack Cable Using RG174 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Water Blue FAKRA Jack Cable Using RG174 Coax with HeatShrink PE39199Z/HS](#)

URL: <https://www.pasternack.com/sma-male-to-fakra-jack-cable-using-rg174-with-heatshrink-pe39199z-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE39199Z/HS CAD Drawing
SMA Male to Water Blue FAKRA Jack Cable Using RG174 Coax with HeatShrink

