

SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder



**RF Cable Assemblies Technical Data Sheet**

**PE39423LF**

**Configuration**

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: PE-SR402FL

**Features**

- Max Frequency 18 GHz
- Shielding Effectivity > 110 dB
- 69.5% Phase Velocity


**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE39423LF SMA male to SMA male cable using PE-SR402FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm formable PE-SR402FL coax. The PE39423LF SMA male to SMA male cable assembly operates to 18 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

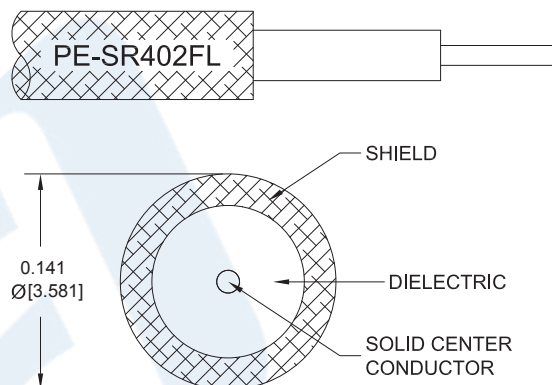

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder PE39423LF](#)



SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder

**RF Cable Assemblies Technical Data Sheet**

**PE39423LF**

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Velocity of Propagation		69.5		%
RF Shielding	110			dB
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		7.8 [25.59]		$\Omega$ /1000ft [ $\Omega$ /Km]
DC Resistance Outer Conductor		5.5 [18.04]		$\Omega$ /1000ft [ $\Omega$ /Km]

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Typ.)	0.103	0.162	0.268	0.418	0.65	dB/ft
	0.34	0.53	0.88	1.37	2.13	dB/m

**Electrical Specification Notes:**

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

**Mechanical Specifications**

**Cable Assembly**

Weight 0.035 lbs [15.88 g]

**Cable**

Cable Type PE-SR402FL  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Outer Conductor Material and Plating Tinned Copper Braid  
 Repeated Minimum Bend Radius 0.625 in [15.88 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder PE39423LF](#)



SMA Male to SMA Male Cable Using PE-  
SR402FL Coax , LF Solder

## RF Cable Assemblies Technical Data Sheet

**PE39423LF**

### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Body Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 inch	5/16 inch
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]

### Environmental Specifications

#### Temperature

Operating Range -55 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder PE39423LF](#)



## SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

**PE39423LF**

#### How to Order

Part Number Configuration:

**PE39423LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE39423LF-12 = 12 inches long cable  
PE39423LF-100cm = 100 cm long cable

SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder PE39423LF](#)

URL: <https://www.pasternack.com/sma-male-to-sma-male-cable-using-pe-sr402fl-lf-solder-pe39423lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE39423LF CAD Drawing  
SMA Male to SMA Male Cable Using PE-SR402FL Coax , LF Solder

