

## SMA Male Right Angle to BNC Female Bulkhead Cable 12 Inch Length Using RG174 Coax , LF Solder





### PE3972LF-12

#### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: BNC Female Bulkhead
- Cable Type: RG174
- Coax Flex Type: Flexible

#### Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

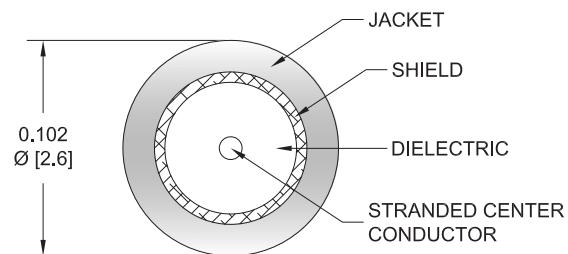

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3972LF-12 SMA male right angle to BNC female bulkhead 12 inch cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to BNC cable assembly has a male to female gender configuration with 50 ohm flexible RG174 coax. The PE3972LF-12 SMA male to BNC female cable assembly operates to 1 GHz. The right angle SMA interface on the RG174 cable allows for easier connections in tight spaces. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation	66			%
Capacitance	31.08 [101.97]			pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz

## SMA Male Right Angle to BNC Female Bulkhead Cable 12 Inch Length Using RG174 Coax , LF Solder



### PE3972LF-12

#### Mechanical Specifications

##### Cable Assembly

Length	12 in [304.8 mm]
Width/Diameter	0.5 in [12.7 mm]
Weight	0.069 lbs [31.3 g]

##### Cable

Cable Type	RG174
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	BNC Female Bulkhead
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 $\mu$ in minimum	30 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 $\mu$ in minimum	100 $\mu$ in minimum
Coupling Nut Material and Plating	Brass, Nickel	

#### Environmental Specifications

Operating Range Temperature -40 to +80 deg C

#### Compliance Certifications

(see [product page](#) for current document)

#### Plotted and Other Data

Notes:

SMA Male Right Angle to BNC Female Bulkhead Cable  
12 Inch Length Using RG174 Coax , LF Solder



## PE3972LF-12

### Typical Performance Data

### How to Order

Part Number Configuration:

PE3972LF - xx uu

Legend:

- Unit of Measure:  
cm = Centimeters  
<blank> = Inches
- Length
- Base Number

Example: PE3972LF-12 = 12 inches long cable  
PE3972LF-100cm = 100 cm long cable

SMA Male Right Angle to BNC Female Bulkhead Cable 12 Inch Length Using RG174 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Female Bulkhead Cable 12 Inch Length Using RG174 Coax , LF Solder PE3972LF-12](#)

URL: <https://www.pasternack.com/sma-male-to-bnc-female-bulkhead-cable-12-inch-length-using-rg174-lf-solder-pe3972lf-12-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3972LF-12 CAD Drawing

SMA Male Right Angle to BNC Female Bulkhead Cable 12 Inch Length Using RG174 Coax , LF Solder

