

75 Ohm TNC Male to 75 Ohm TNC Female
Bulkhead Cable Using 75 Ohm RG179 Coax

TECHNICAL DATA SHEET

PE3C0203

75 Ohm TNC Male to 75 Ohm TNC Female Bulkhead Cable Using 75 Ohm RG179 Coax

Configuration

Connector 1	TNC Male
Connector 2	TNC Female Bulkhead
Cable Type	RG179
Impedance, Ohms	75

Mechanical Specifications

Cable Assembly

Cable Type	RG179
Diameter, in [mm]	0.688 [17.48]
Weight, lbs [g]	0.093 [42.18]
Cable Color	Tan

Cable

No of Shields	1
Dielectric Type	PTFE
Jacket Material	FEP
Jacket Diameter, in [mm]	0.1 [2.54]

Connector 1

Type	TNC Male
Configuration	Straight

Connector 2

Type	TNC Female Bulkhead
Configuration	Straight
Mount Method	Bulkhead
Inner Conductor Material and Plating	Silver
Body Material and Plating	Nickel

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Male to 75 Ohm TNC Female Bulkhead Cable Using 75 Ohm RG179 Coax PE3C0203](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

75 Ohm TNC Male to 75 Ohm TNC Female
Bulkhead Cable Using 75 Ohm RG179 Coax

TECHNICAL DATA SHEET

PE3C0203

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:

Values at 25 °C, sea level

75 Ohm TNC Male to 75 Ohm TNC Female Bulkhead Cable Using 75 Ohm RG179 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Male to 75 Ohm TNC Female Bulkhead Cable Using 75 Ohm RG179 Coax PE3C0203](http://www.pasternack.com/tnc-male-tnc-female-rg179bu-cable-assembly-pe3c0203-p.aspx)

URL: <http://www.pasternack.com/tnc-male-tnc-female-rg179bu-cable-assembly-pe3c0203-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE3C0203 CAD Drawing

75 Ohm TNC Male to 75 Ohm TNC Female Bulkhead Cable Using 75 Ohm RG179 Coax

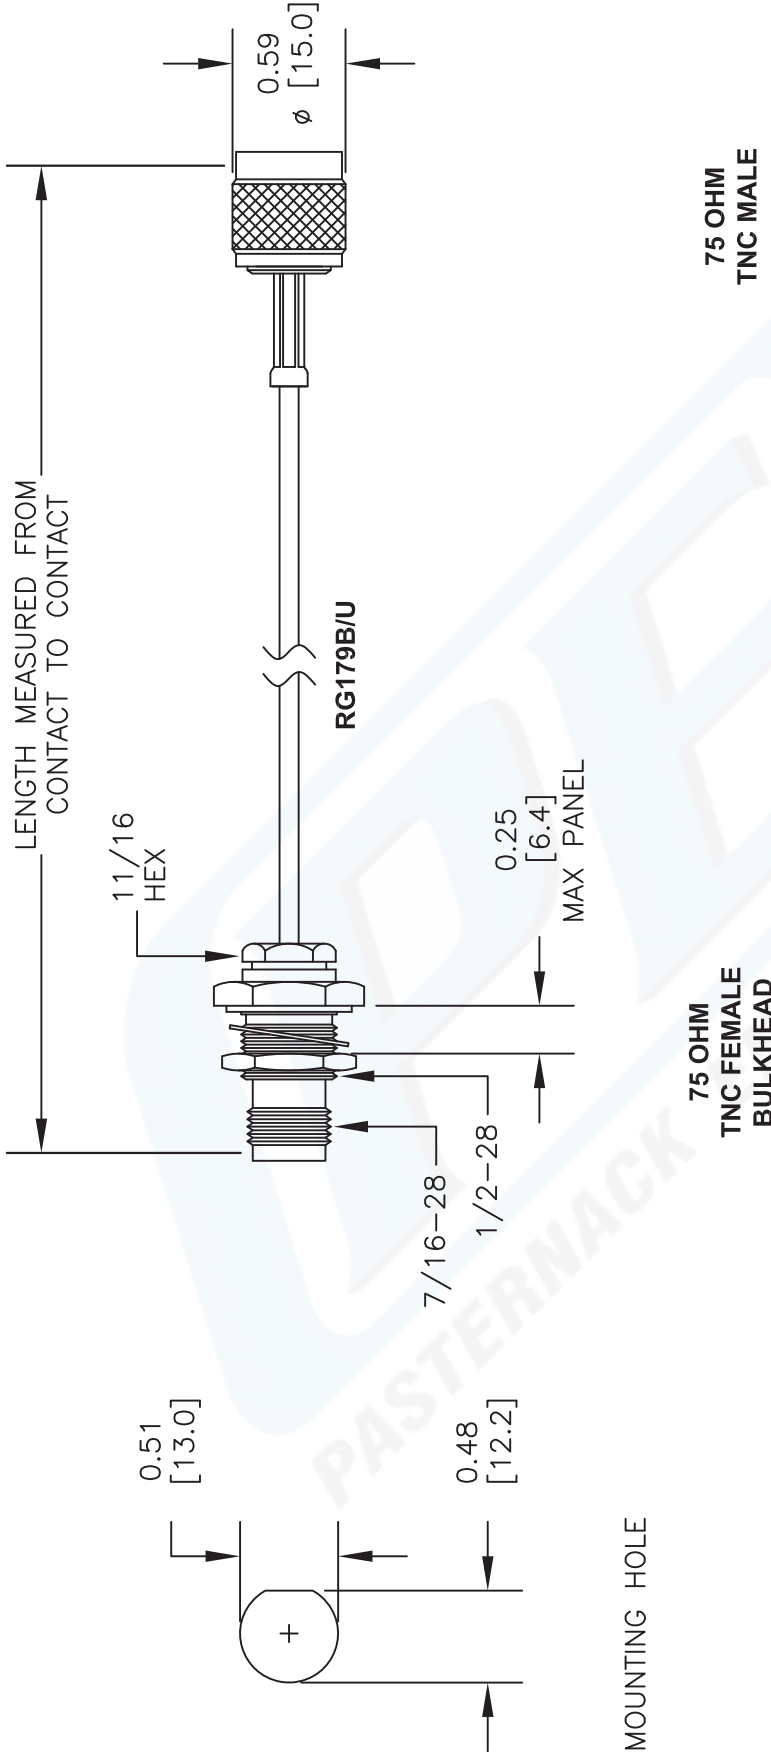

How To Order					
Part Number Configuration PE3 zzz yy - xx uu 00 - 99999 LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables		Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM			
		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
		-12	12"	-25CM	25Cm
		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
-60	60"	-125CM	125Cm		
		-xx	Custom Length	-xxCM	Custom Length

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE
PE3C0203

PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 102413

SCALE N/A

SIZE A

2233