



MMCX Plug Right Angle to SMA Male Right Angle
Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet


PE3C0406

Configuration

- Connector 1: MMCX Plug Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: LMR-100A

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

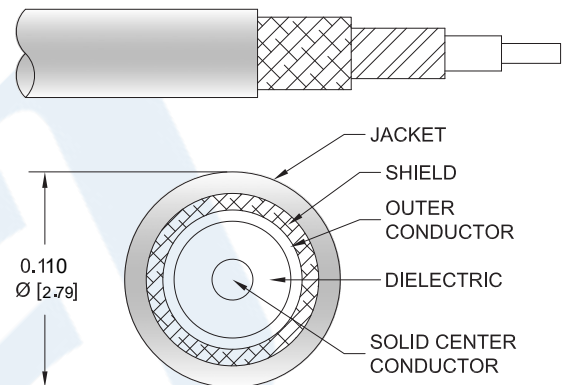

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C0406 MMCX plug right angle to SMA male right angle cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MMCX to SMA cable assembly has a plug to male gender configuration with 50 ohm flexible LMR-100A coax. The PE3C0406 MMCX plug to SMA male cable assembly operates to 5.8 GHz. The right angle MMCX and right angle SMA interfaces on the LMR-100A cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax PE3C0406](#)



MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C0406

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.5:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω /1000ft [Ω /Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω /1000ft [Ω /Km]
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.115	0.165	0.24	0.398	0.641	dB/ft
	0.38	0.54	0.79	1.31	2.1	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.032 lbs [14.51 g]

Cable

Cable Type LMR-100A
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel
 Dielectric Type PE
 Number of Shields 2
 Shield Layer 1 Aluminum Tape
 Shield Layer 2 Tinned Copper Braid
 Jacket Material PVC, Black
 Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax PE3C0406](#)



MMCX Plug Right Angle to SMA Male Right Angle
Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C0406

One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug Right Angle	SMA Male Right Angle
Specification	BS EN 122340	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification	3 µin minimum	100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum
Hex Size		5/16 inch
Torque		3 in-lbs [0.34 Nm]

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
-----------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax PE3C0406](#)



MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C0406

How to Order

Part Number Configuration:

PE3C0406

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C0406-12 = 12 inches long cable
PE3C0406-100cm = 100 cm long cable


MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax PE3C0406](#)

URL: <https://www.pasternack.com/mmcx-plug-right-angle-to-sma-male-low-loss-cable-using-lmr-100-pe3c0406-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax

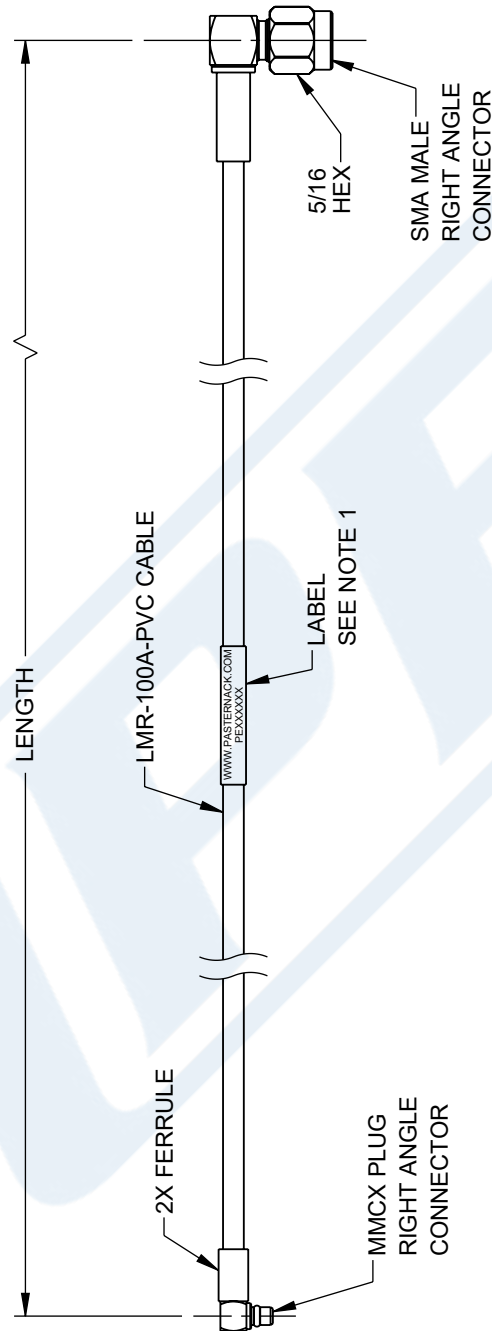

- NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS , ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN WHOLE OR PART WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

REVISION				
ZONE	REV.	DESCRIPTION	DATE	CHANGED BY
	A	INITIAL RELEASE	04/13/2023	BPUCHASKI
				AGANWANI

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS				INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5											
TOLERANCES: <table><tr><td>X = ± .2</td><td>[.5]</td><td>FRACTIONS</td></tr><tr><td>XX = ± .02</td><td>[.5]</td><td>1 / 32</td></tr><tr><td>XXX = ± .005</td><td>[.13]</td><td>ANGLES ± 1°</td></tr></table>		X = ± .2	[.5]	FRACTIONS	XX = ± .02	[.5]	1 / 32	XXX = ± .005	[.13]	ANGLES ± 1°					
X = ± .2	[.5]	FRACTIONS													
XX = ± .02	[.5]	1 / 32													
XXX = ± .005	[.13]	ANGLES ± 1°													
CABLE LENGTH TOLERANCES: <table><tr><td>≤12 [305]</td><td>≤ +1 [25] / -0</td></tr><tr><td>>12 [305] ≤ 60 [1524]</td><td>≤ +2 [51] / -0</td></tr><tr><td>>60 [1524] ≤ 120 [3048]</td><td>≤ +4 [102] / -0</td></tr><tr><td>>120 [3048] ≤ 300 [7620]</td><td>≤ +6 [152] / -0</td></tr><tr><td>>300 [7620]</td><td>≤ +5% / -0</td></tr></table>		≤12 [305]	≤ +1 [25] / -0	>12 [305] ≤ 60 [1524]	≤ +2 [51] / -0	>60 [1524] ≤ 120 [3048]	≤ +4 [102] / -0	>120 [3048] ≤ 300 [7620]	≤ +6 [152] / -0	>300 [7620]	≤ +5% / -0				
≤12 [305]	≤ +1 [25] / -0														
>12 [305] ≤ 60 [1524]	≤ +2 [51] / -0														
>60 [1524] ≤ 120 [3048]	≤ +4 [102] / -0														
>120 [3048] ≤ 300 [7620]	≤ +6 [152] / -0														
>300 [7620]	≤ +5% / -0														
DESCRIPTION															
MMCX Plug Right Angle to SMA Male Right Angle Low Loss Cable Using LMR-100 Coax															
SIZE		CAGE CODE		DRAWN BY											
A		53919		BPUCHASKI											
ITEM NO.				REV											
PE3C0406				A											