

## SMA Female to SMB Plug Right Angle Cable Using RG178 Coax, LF Solder





### PE3C0432LF

#### Configuration

- Connector 1: SMA Female
- Connector 2: SMB Plug Right Angle
- Cable Type: RG178
- Coax Flex Type: Flexible

#### Features

- Max Frequency 2 GHz
- 69.5% Phase Velocity
- FEP Jacket

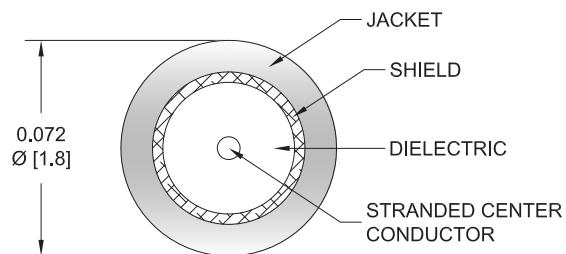

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C0432LF SMA female to SMB plug right angle cable using RG178 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMB cable assembly has a female to plug gender configuration with 50 ohm flexible RG178 coax. The PE3C0432LF SMA female to SMB plug cable assembly operates to 2 GHz. The right angle SMB interface on the RG178 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR		1.4:1		
Velocity of Propagation		69.5		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

#### Specifications by Frequency

## SMA Female to SMB Plug Right Angle Cable Using RG178 Coax, LF Solder



### PE3C0432LF

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	2000	MHz	
PE3C0432LF	Custom Lengths Available	Insertion Loss (Typ.)	0.13	0.18	0.26	0.44	0.61	dB/ft	
			0.43	0.6	0.86	1.45	2.01	dB/m	
PE3C0432LF-6	6 inch	Insertion Loss (Typ.)	0.37	0.39	0.43	0.52	0.61	dB	0.023
PE3C0432LF-9	9 inch	Insertion Loss (Typ.)	0.4	0.44	0.5	0.63	0.76	dB	0.024
PE3C0432LF-12	12 inch	Insertion Loss (Typ.)	0.43	0.48	0.56	0.74	0.91	dB	0.025
PE3C0432LF-24	24 inch	Insertion Loss (Typ.)	0.56	0.66	0.82	1.18	1.52	dB	0.031
PE3C0432LF-36	36 inch	Insertion Loss (Typ.)	0.69	0.84	1.08	1.62	2.13	dB	0.036

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.025 pounds
Additional Weight per Inch:	0.00042 pounds

### Mechanical Specifications

#### Cable Assembly

Weight	0.025 lbs [11.34 g]
--------	---------------------

#### Cable

Cable Type	RG178
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.072 in [1.83 mm]
Repeated Minimum Bend Radius	0.393 in [9.98 mm]

### Connectors

Description	Connector 1	Connector 2
Type	SMA Female	SMB Plug Right Angle
Specification	MIL-STD-348	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204	30 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	100 $\mu$ in minimum

## SMA Female to SMB Plug Right Angle Cable Using RG178 Coax, LF Solder



### PE3C0432LF

#### Environmental Specifications

**Compliance Certifications** (see product page for current document)


#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:

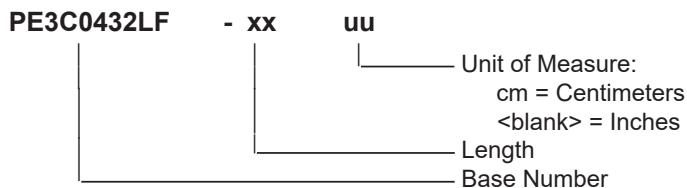

Example: PE3C0432LF-12 = 12 inches long cable  
PE3C0432LF-100cm = 100 cm long cable

SMA Female to SMB Plug Right Angle Cable Using RG178 Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to SMB Plug Right Angle Cable Using RG178 Coax, LF Solder PE3C0432LF](#)

URL: <https://www.pasternack.com/sma-female-to-smb-plug-cable-using-rg178-lf-solder-pe3c0432lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C0432LF CAD Drawing

SMA Female to SMB Plug Right Angle Cable Using RG178 Coax, LF Solder

