



SMP Female Right Angle to MCX Plug Right Angle Cable Using PE-SR405FLJ Coax , LF Solder in 100CM

RF Cable Assemblies Technical Data Sheet



PE3C0645LF-100CM

Configuration

- Connector 1: SMP Female Right Angle
- Connector 2: MCX Plug Right Angle
- Cable Type: PE-SR405FLJ

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

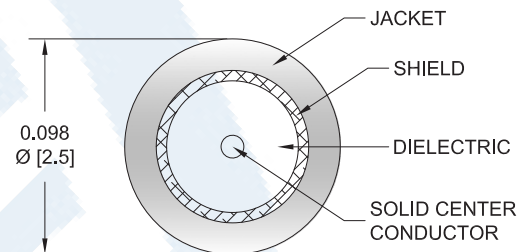

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C0645LF-100CM SMP female right angle to MCX plug right angle 39.37 inch cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMP to MCX cable assembly has a female to plug gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE3C0645LF-100CM SMP female to MCX plug cable assembly operates to 6 GHz. The right angle SMP and right angle MCX interfaces on the PE-SR405FLJ cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to MCX Plug Right Angle Cable Using PE-SR405FLJ Coax , LF Solder in 100CM PE3C0645LF-100CM](#)



SMP Female Right Angle to MCX Plug Right Angle Cable
Using PE-SR405FLJ Coax , LF Solder in 100CM

RF Cable Assemblies Technical Data Sheet

PE3C0645LF-100CM

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|---------------|---------|----------------------------------|
| Frequency Range | DC | | 6 | GHz |
| Velocity of Propagation | | 69.5 | | % |
| RF Shielding | 100 | | | dB |
| Group Delay | | 1.43 [4.69] | | ns/ft [ns/m] |
| Capacitance | | 29 [95.14] | | pF/ft [pF/m] |
| DC Resistance Inner Conductor | | 65.7 [215.55] | | Ω /1000ft [Ω /Km] |
| DC Resistance Outer Conductor | | 10.2 [33.46] | | Ω /1000ft [Ω /Km] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|-----|------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 6 | GHz |
| Insertion Loss (Typ.) | 0.28 | 0.32 | 1.04 | 1.5 | 3.08 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 x SQRT(FGHz)dB for the female connector and 0.2 dB for the male connector.

Mechanical Specifications

Cable Assembly

Length* 39.37 in [100 cm]
Weight 0.041 lbs [18.6 g]

Cable

Cable Type PE-SR405FLJ
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Outer Conductor Material and Plating Tinned Copper Composite Braid
Jacket Material FEP, Black
Jacket Diameter 0.105 in [2.67 mm]

One Time Minimum Bend Radius 0.5 in [12.7 mm]
Repeated Minimum Bend Radius 0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to MCX Plug Right Angle Cable Using PE-SR405FLJ Coax , LF Solder in 100CM PE3C0645LF-100CM](#)



SMP Female Right Angle to MCX Plug Right Angle Cable
Using PE-SR405FLJ Coax , LF Solder in 100CM

RF Cable Assemblies Technical Data Sheet

PE3C0645LF-100CM

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------|------------------------|-------------------------|
| Type | SMP Female Right Angle | MCX Plug Right Angle |
| Specification | MIL-STD-348A | |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Beryllium Copper, Gold | Brass, Gold over Nickel |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Beryllium Copper, Gold | Brass, Gold over Nickel |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to MCX Plug Right Angle Cable Using PE-SR405FLJ Coax , LF Solder in 100CM PE3C0645LF-100CM](#)



SMP Female Right Angle to MCX Plug Right Angle Cable Using PE-SR405FLJ Coax , LF Solder in 100CM

RF Cable Assemblies Technical Data Sheet

PE3C0645LF-100CM

How to Order

Part Number Configuration:

PE3C0645LF - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C0645LF-12 = 12 inches long cable
PE3C0645LF-100cm = 100 cm long cable

SMP Female Right Angle to MCX Plug Right Angle Cable Using PE-SR405FLJ Coax , LF Solder in 100CM from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to MCX Plug Right Angle Cable Using PE-SR405FLJ Coax , LF Solder in 100CM PE3C0645LF-100CM](https://www.pasternack.com/smp-female-right-angle-to-mcx-plug-cable-using-pe-sr405flj-lf-solder-pe3c0645lf-100cm-p.aspx)

URL: <https://www.pasternack.com/smp-female-right-angle-to-mcx-plug-cable-using-pe-sr405flj-lf-solder-pe3c0645lf-100cm-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C0645LF-100CM CAD Drawing

SMP Female Right Angle to MCX Plug Right Angle Cable

Using PE-SR405FLJ Coax , LF Solder in 100CM

| REVISIONS | | | |
|-----------|-----------------|------------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 08/10/2022 | AGANWANI |

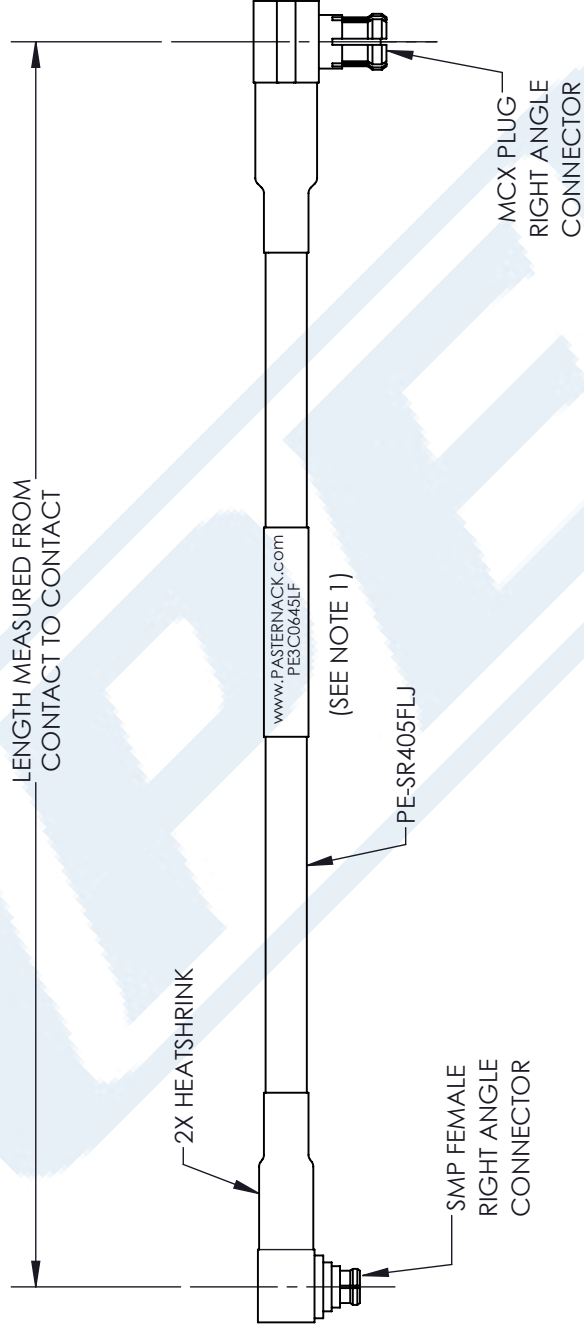

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

| | | |
|--------------|--------|-------------|
| .X = ±.2 | [.508] | FRACTIONS |
| .XX = ±.02 | [.51] | ± 1/32 |
| .XXX = ±.005 | [.13] | ANGLES ± 1° |

CABLE LENGTH (L) TOLERANCES:

| | | |
|-----------------------------|-----------|-----|
| L ≤ 12 [305] | ±.1 [25] | /-0 |
| 12 [305] < L ≤ 60 [1524] | ±.2 [51] | /-0 |
| 60 [1524] < L ≤ 120 [3048] | ±.4 [102] | /-0 |
| 120 [3048] < L ≤ 300 [7620] | ±.6 [152] | /-0 |
| 300 [7620] < L | ±.5% [L] | /-0 |

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

PE PASTERNAK
an INFINITI brand

Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

| | | | |
|------|-----------|-----------|------------|
| SIZE | CAGE CODE | DRAWN BY | ITEM NO. |
| A | 53919 | BPUCHASKI | PE3C0645LF |

NOTES:

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM END OF CONNECTOR

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.