

## 1.85mm Female to 1.85mm Female Low Loss Test Cable Using PE-TC142A Coax



### PE3C100083

#### Configuration

- Connector 1: 1.85mm Female
- Connector 2: 1.85mm Female
- Cable Type: PE-TC142A
- Coax Flex Type: Flexible

#### Features

- Max Frequency 67 GHz
- 77% Phase Velocity
- Double Shielded
- Ruggedized Aramid yarn Jacket
- Excellent Phase and Loss Stability with Flexure
- Low Loss Performance

#### Applications

- General Purpose
- Test & Measurement
- Laboratory Use
- VNA Test Port Extenders
- Semiconductor Probe Testing
- Precise Bench-Top Testing
- Lab and Production Testing

#### Description

Pasternack's PE3C100083 1.85mm female to 1.85mm female cable using PE-TC142A coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 1.85mm to 1.85mm cable assembly has a female to female gender configuration with 50 ohm flexible PE-TC142A coax. The PE3C100083 1.85mm female to 1.85mm female cable assembly operates to 67 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		67	GHz
VSWR			1.5:1	
Velocity of Propagation		77		%
Phase Stability with Flexure		19		Degrees
Loss Stability with Flexure		0.1		dB

#### Specifications by Frequency

## 1.85mm Female to 1.85mm Female Low Loss Test Cable Using PE-TC142A Coax



### PE3C100083

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	5000	10000	20000	40000	67000	
PE3C100083	Custom Lengths Available	Insertion Loss (Typ.)	0.456	0.655	0.98	1.439	1.925	dB/ft	
			1.5	2.15	3.22	4.73	6.32	dB/m	
PE3C100083-12	12 In	Insertion Loss (Typ.)	0.68	0.98	1.43	2.08	2.75	dB	0.416
PE3C100083-24	24 In	Insertion Loss (Typ.)	1.14	1.63	2.41	3.52	4.67	dB	0.432
PE3C100083-36	36 In	Insertion Loss (Typ.)	1.6	2.29	3.39	4.95	6.6	dB	0.448
PE3C100083-100CM	100 CM	Insertion Loss (Typ.)	1.72	2.47	3.67	5.36	7.14	dB	0.452
PE3C100083-150CM	150 CM	Insertion Loss (Typ.)	2.47	3.54	5.28	7.72	10.3	dB	0.478

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.05\*SQRT(FGHz) dB

Loss due to Connector 2: 0.05\*SQRT(FGHz) dB

Base Weight: 0.416 pounds

Additional Weight per Inch: 0.00133 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter: 0.5 in [12.7 mm]  
Weight: 0.416 lbs [188.69 g]

#### Cable

Cable Type: PE-TC142A  
Impedance: 50 Ohms  
Inner Conductor Type: Stranded  
Inner Conductor Material and Plating: Copper, Silver  
Dielectric Type: PTFE  
Number of Shields: 2  
Shield Layer 1: Silver Plated Copper  
Shield Layer 2: Silver Plated Copper Braid  
Jacket Material: Ruggedized Aramid yarn  
Jacket Diameter: 0.141 in [3.58 mm]  
Repeated Minimum Bend Radius: 0.98 in [24.89 mm]

### Connectors

Description	Connector 1	Connector 2
Type	1.85mm Female	1.85mm Female
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	Polystyrene	Polystyrene
Outer Conductor Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel

## 1.85mm Female to 1.85mm Female Low Loss Test Cable Using PE-TC142A Coax



### PE3C100083

#### Environmental Specifications

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration: **PE3C100083 - xx uu**

PE3C100083: Base Number  
 - xx: Length  
 uu: Unit of Measure:  
 cm = Centimeters  
 <blank> = Inches

Example: PE3C100083-12 = 12 inches long cable  
 PE3C100083-100cm = 100 cm long cable

1.85mm Female to 1.85mm Female Low Loss Test Cable Using PE-TC142A Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Female to 1.85mm Female Low Loss Test Cable Using PE-TC142A Coax PE3C100083](#)

URL: <https://www.pasternack.com/1.85mm-female-to-1.85mm-female-low-loss-test-cable-using-pe-tc142a-pe3c100083-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C100083 CAD Drawing

1.85mm Female to 1.85mm Female Low Loss Test Cable Using PE-TC142A Coax

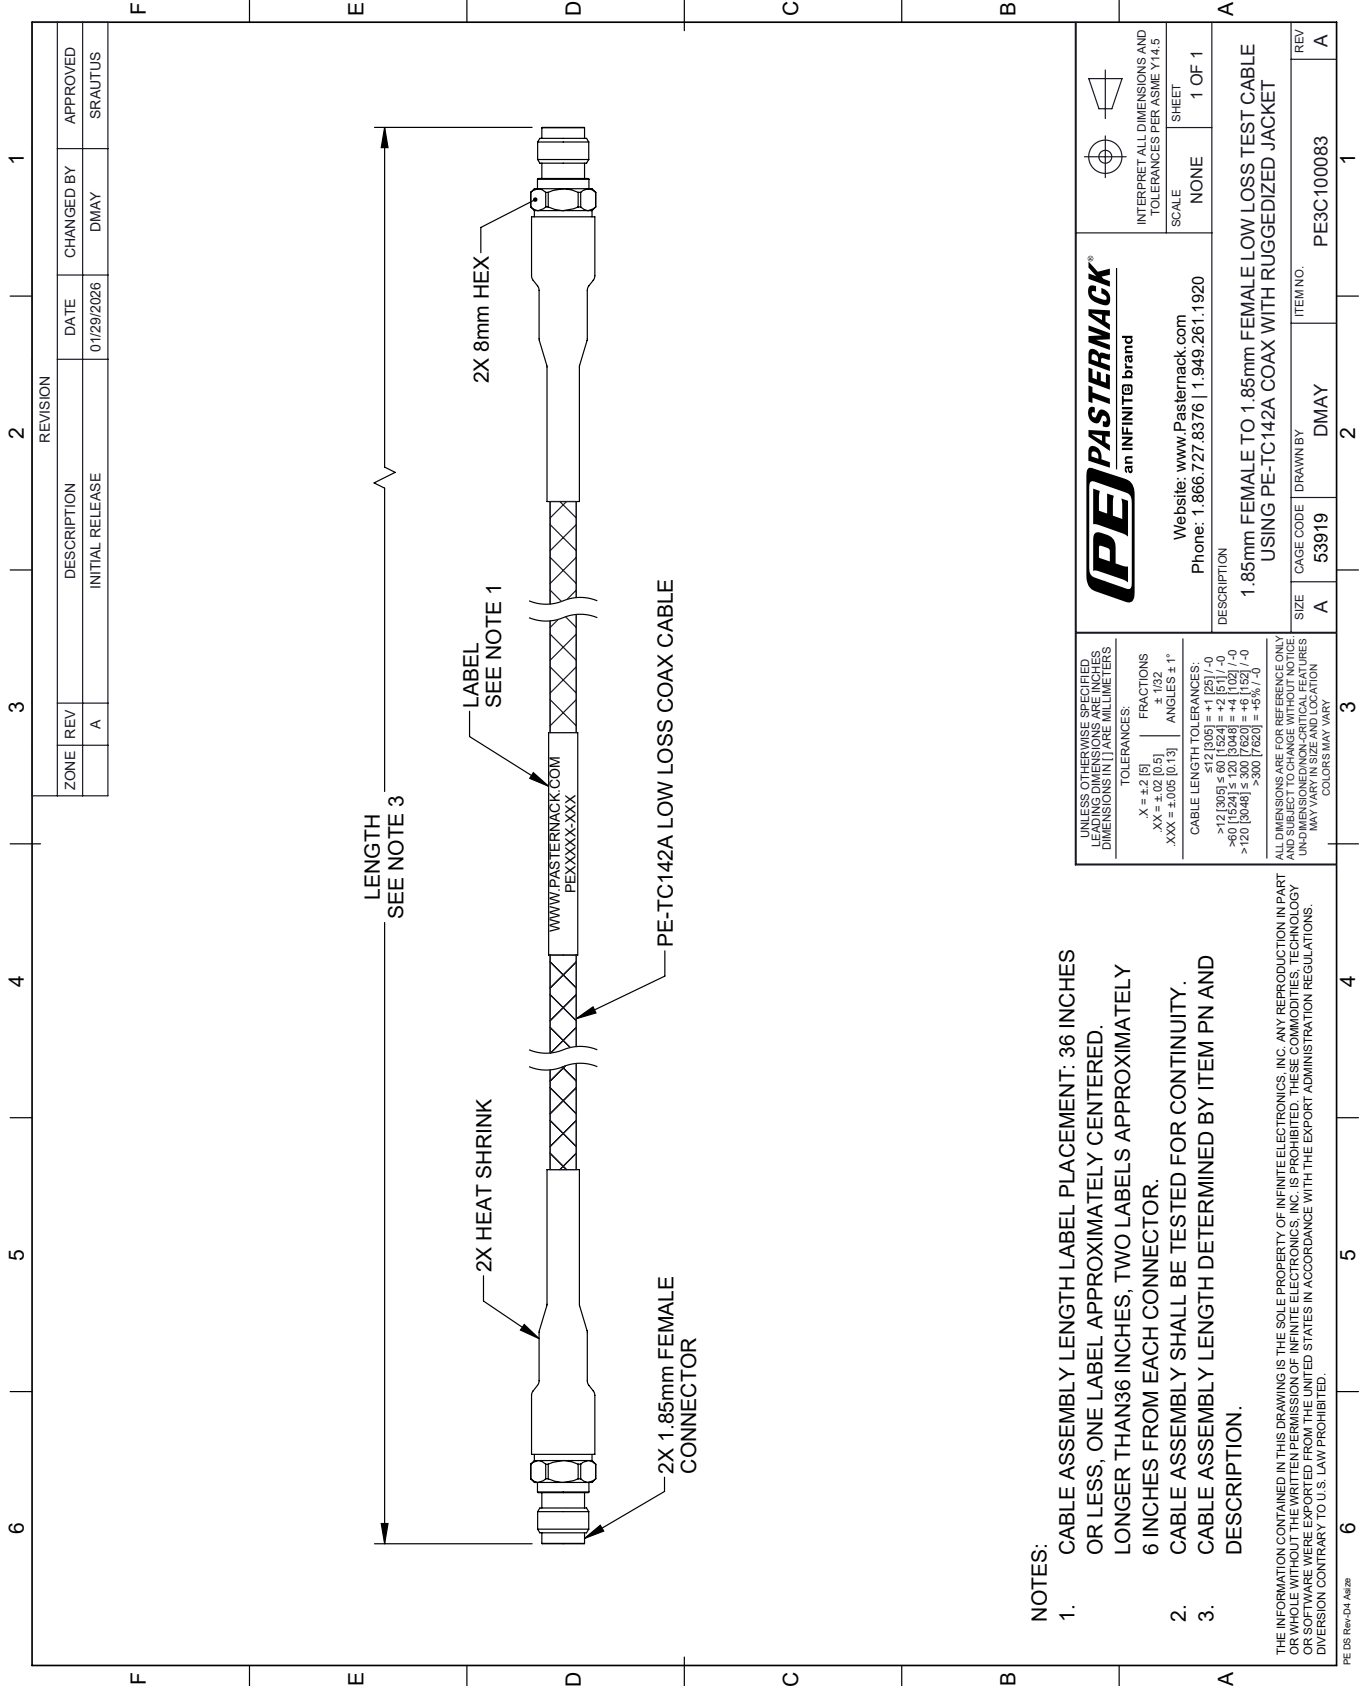

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE DS Rev-04 Add2

	INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
	SCALE	SHEET
Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a> Phone: 1.866.727.8376   1.949.261.1920	NONE 1 OF 1	
DESCRIPTION 1.85mm FEMALE TO 1.85mm FEMALE LOW LOSS TEST CABLE USING PE-TC142A COAX WITH RUGGEDIZED JACKET		
SIZE	CAGE CODE	ITEM NO.
A	53919	PE3C100083
DRAWN BY		REV
DMAY		A

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE MILLIMETERS.

TOLERANCES:  
 .X = ±.2 [5]  
 .XX = ±.02 [0.5]  
 .XXX = ±.005 [0.13]

FRACTIONS:  
 ± 1/32  
 ANGLES ± 1°

CABLE LENGTH TOLERANCES:  
 <12 [305] ≤ 60 [1524] = ±.1 [25] / -0  
 >60 [1524] ≤ 120 [3048] = ±.4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = ±.6 [152] / -0  
 >300 [7620] = ±.9 [229] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. DIMENSIONS OF NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.