

Plenum TNC Male to TNC Male Low Loss Cable Using LMR-240-LLPX Coax with Times Microwave Components




PE3C10287

Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: LMR-240-LLPX

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 76% Phase Velocity
- Fluoropolymer Jacket
- 500 Mating Cycles

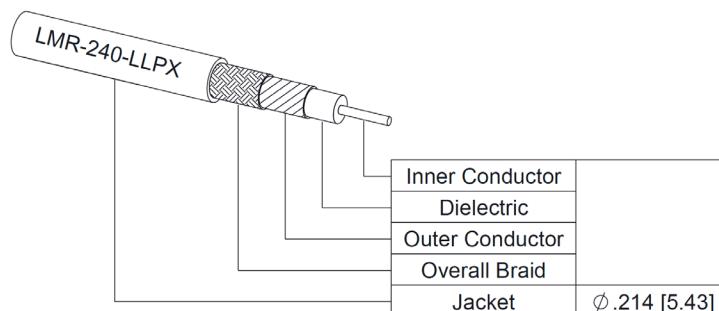

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C10287 TNC male to TNC male cable using LMR-240-LLPX coax is part of our full line of RF components available for same-day shipping. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 50 ohm LMR-240-LLPX coax. The PE3C10287 TNC male to TNC male cable assembly operates to 6 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	90			dB
Capacitance		26.7 [87.6]		pF/ft [pF/m]
Inductance		0.067 [0.22]		uH/ft [uH/m]
DC Resistance Inner Conductor	4 [13.12]			Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor	3.9 [12.8]			Ohms/1000ft [Ohms/Km]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Plenum TNC Male to TNC Male Low Loss Cable Using LMR-240-LLPX Coax with Times Microwave Components



PE3C10287

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3C10287	Custom Lengths Available	Insertion Loss (Typ.)	0.038	0.056	0.079	0.129	0.203	dB/ft	
			0.13	0.19	0.26	0.43	0.67	dB/m	
PE3C10287-12	12 Inch	Insertion Loss (Typ.)	0.24	0.26	0.28	0.33	0.41	dB	0.135
PE3C10287-24	24 Inch	Insertion Loss (Typ.)	0.28	0.32	0.36	0.46	0.61	dB	0.171
PE3C10287-36	36 Inch	Insertion Loss (Typ.)	0.32	0.37	0.44	0.59	0.81	dB	0.206
PE3C10287-48	48 Inch	Insertion Loss (Typ.)	0.36	0.43	0.52	0.72	1.02	dB	0.241
PE3C10287-60	60 Inch	Insertion Loss (Typ.)	0.39	0.48	0.6	0.85	1.22	dB	0.276

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.135 pounds

Additional Weight per Inch: 0.4983 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.135 lbs [61.23 g]

Cable

Cable Type	LMR-240-LLPX
Impedance	50 Ohms
Inner Conductor Material and Plating	Copper
Dielectric Type	PTFE
Outer Conductor 1 Material and Plating	Aluminum Tape
Jacket Material	Fluoropolymer
Jacket Diameter	0.214 in [5.44 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Flat Plate Crush	85 lbs/in [1.52 Kg/mm]
Tensile Strength	60 lbs [27.22 Kg]

Plenum TNC Male to TNC Male Low Loss Cable Using LMR-240-LLPX Coax with Times Microwave Components



PE3C10287

Connectors

Description	Connector 1	Connector 2
Type	TNC Male	TNC Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	500
Contact Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Contact Plating Specification	50µ in. minimum	50µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80µ in. minimum	80µ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	80µ in. minimum	80µ in. minimum
Torque	20 in-lbs 2.26 Nm	20 in-lbs 2.26 Nm

Environmental Specifications

Operating Range Temperature -40 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Plenum TNC Male to TNC Male Low Loss Cable Using LMR-240-LLPX Coax with Times Microwave Components




PE3C10287

Typical Performance Data

How to Order

Part Number Configuration:

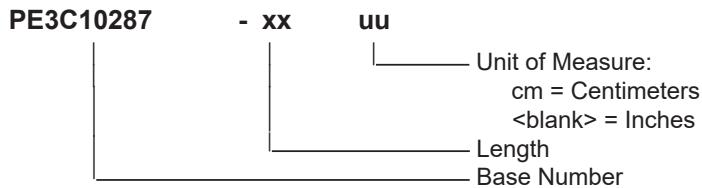

Example: PE3C10287-12 = 12 inches long cable
PE3C10287-100cm = 100 cm long cable

Plenum TNC Male to TNC Male Low Loss Cable Using LMR-240-LLPX Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum TNC Male to TNC Male Low Loss Cable Using LMR-240-LLPX Coax with Times Microwave Components PE3C10287](#)

URL: <https://www.pasternack.com/plenum-tnc-male-to-tnc-male-low-loss-cable-using-lmr-240-llpx-pe3c10287-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C10287 CAD Drawing

Plenum TNC Male to TNC Male Low Loss Cable Using LMR-240-LLPX Coax with Times Microwave Components

