

Fire Rated N Male to N Male Right Angle Low Loss Cable Using TCOM-195-FR Coax With Times Microwave Components




PE3C10385

Configuration

- Connector 1: N Male
- Connector 2: N Male Right Angle
- Cable Type: TCOM-195-FR
- Coax Flex Type: Flexible

Features

- Max Frequency 6 GHz
- 80% Phase Velocity
- Triple Shielded
- PE Jacket
- 500 Mating Cycles

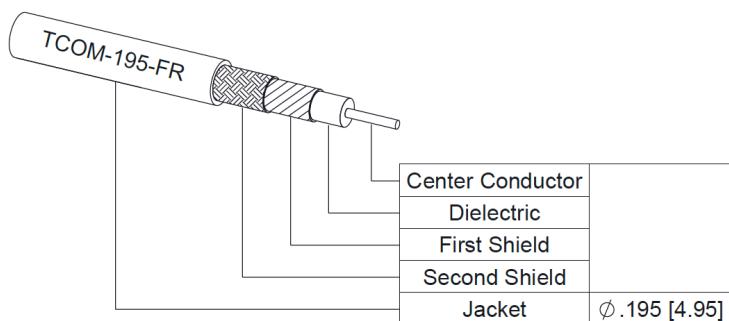

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C10385 type N male to type N male right angle cable using TCOM-195-FR coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-195-FR coax. The PE3C10385 type N male to type N male cable assembly operates to 6 GHz. The right angle type N interface on the TCOM-195-FR cable allows for easier connections in tight spaces. The triple shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		80		%
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.16 [23.49]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.42 [11.22]		Ohms/1000ft [Ohms/Km]
Jacket Spark			3,000	Vrms

Specifications by Frequency

Fire Rated N Male to N Male Right Angle Low Loss Cable Using TCOM-195-FR Coax With Times Microwave Components



PE3C10385

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3C10385	Custom Lengths Available	Insertion Loss (Typ.)	0.036	0.073	0.106	0.172	0.271	dB/ft	
			0.12	0.24	0.35	0.57	0.89	dB/m	
PE3C10385-12	12 inch	Insertion Loss (Typ.)	0.52	0.56	0.59	0.66	0.76	dB	0.212
PE3C10385-24	24 inch	Insertion Loss (Typ.)	0.56	0.63	0.7	0.83	1.03	dB	0.247
PE3C10385-36	36 inch	Insertion Loss (Typ.)	0.59	0.7	0.8	1	1.3	dB	0.282
PE3C10385-48	48 inch	Insertion Loss (Typ.)	0.63	0.78	0.91	1.17	1.57	dB	0.317
PE3C10385-60	60 inch	Insertion Loss (Typ.)	0.66	0.85	1.01	1.34	1.84	dB	0.352

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.28 dB
Loss due to Connector 2: 0.2 dB
Base Weight: 0.212 pounds
Additional Weight per Inch: 0.00291 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.212 lbs [96.16 g]

Cable

Cable Type	TCOM-195-FR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	3
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]

Fire Rated N Male to N Male Right Angle Low Loss Cable Using TCOM-195-FR Coax With Times Microwave Components



PE3C10385

Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male Right Angle
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 μ in minimum	50 μ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification		80 μ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification		80 μ in. minimum
Hex Size	13/16 Inch	30
Torque	9 in-lbs 1.02 Nm	

Environmental Specifications

Operating Range Temperature -40 to +125 deg C

Compliance Certifications

(see product page for current document)

Plotted and Other Data

Notes:

Fire Rated N Male to N Male Right Angle Low Loss Cable Using TCOM-195-FR Coax With Times Microwave Components




PE3C10385

Typical Performance Data

How to Order

Part Number Configuration:

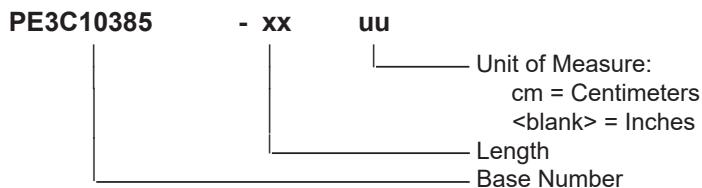

Example: PE3C10385-12 = 12 inches long cable
PE3C10385-100cm = 100 cm long cable

Fire Rated N Male to N Male Right Angle Low Loss Cable Using TCOM-195-FR Coax With Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Fire Rated N Male to N Male Right Angle Low Loss Cable Using TCOM-195-FR Coax With Times Microwave Components PE3C10385](#)

URL: <https://www.pasternack.com/fire-rated-n-male-to-n-male-low-loss-cable-using-tcom-195-fr-pe3c10385-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C10385 CAD Drawing

Fire Rated N Male to N Male Right Angle Low Loss Cable Using TCOM-195-FR Coax With Times Microwave Components

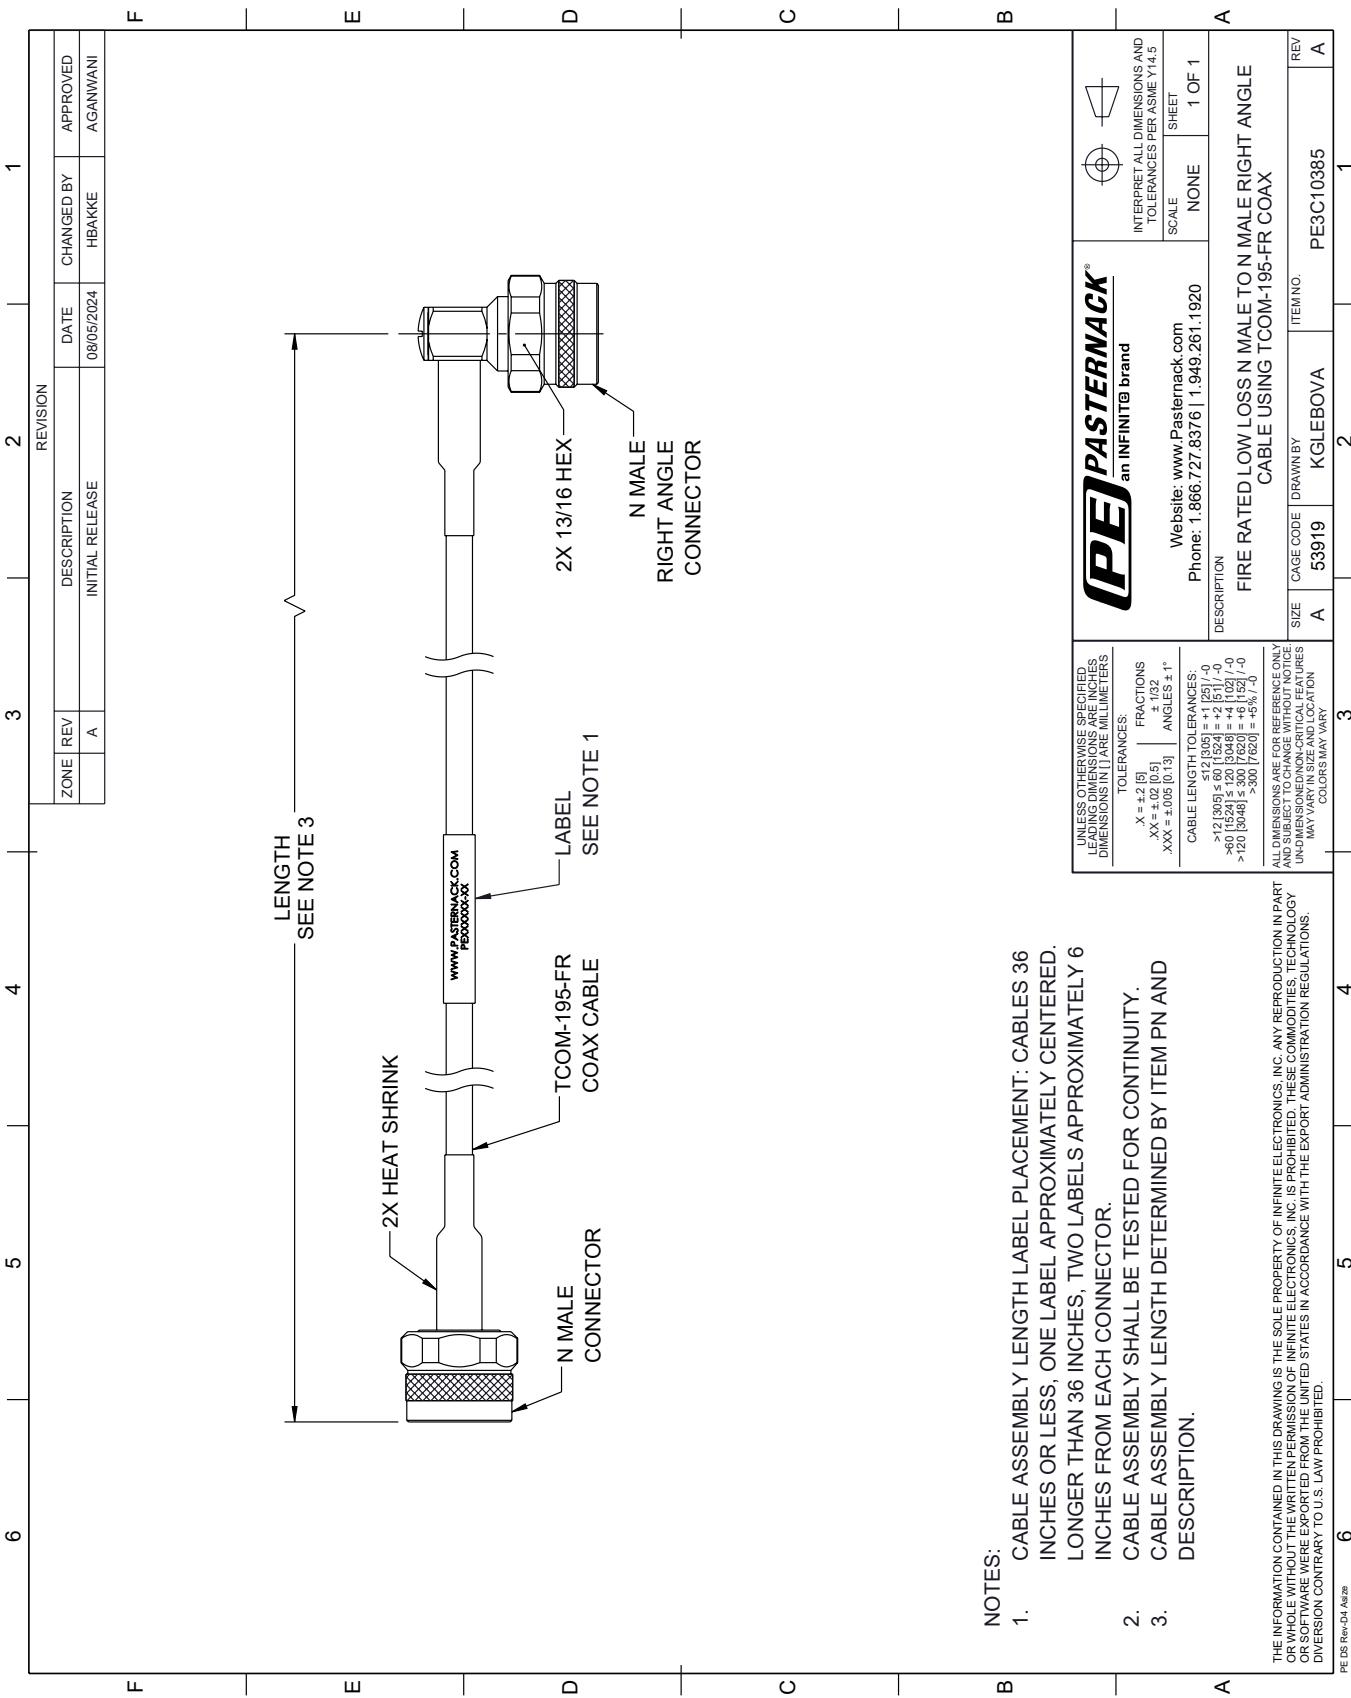

OTES:
CA
INC
LO
INC
CA
CA
DE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.