

## 1.85mm Female to 1.85mm Female Cable Using RG405 Semi-Rigid Coax




### PE3C10445

#### Configuration

- Connector 1: 1.85mm Female
- Connector 2: 1.85mm Female
- Cable Type: RG405
- Coax Flex Type: Semi-Rigid

#### Features

- Max Frequency 40 GHz

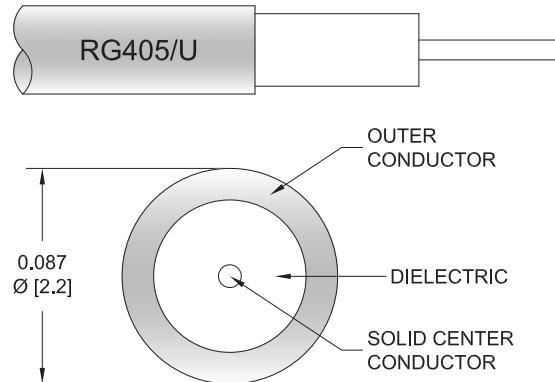

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C10445 1.85mm female to 1.85mm female cable using RG405 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack 1.85mm to 1.85mm cable assembly has a female to female gender configuration with 50 ohm semi-rigid RG405 coax. The PE3C10445 1.85mm female to 1.85mm female cable assembly operates to 40 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	
Dielectric Withstanding Voltage (AC)			1,000	Vrms

#### Specifications by Frequency

## 1.85mm Female to 1.85mm Female Cable Using RG405 Semi-Rigid Coax



### PE3C10445

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	2500	5000	10000	20000	MHz	
PE3C10445	Custom Lengths Available	Insertion Loss (Typ.)	0.316	0.477	0.8	1.2	dB/ft	
			1.04	1.57	2.63	3.94	dB/m	
PE3C10445-6	6 Inch	Insertion Loss (Typ.)	0.36	0.44	0.6	0.8	dB	0.037
PE3C10445-12	12 Inch	Insertion Loss (Typ.)	0.52	0.68	1	1.4	dB	0.043
PE3C10445-18	18 Inch	Insertion Loss (Typ.)	0.68	0.92	1.4	2	dB	0.05
PE3C10445-24	24 Inch	Insertion Loss (Typ.)	0.84	1.16	1.8	2.6	dB	0.057
PE3C10445-36	36 Inch	Insertion Loss (Typ.)	1.15	1.64	2.6	3.8	dB	0.07

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
Loss due to Connector 2: 0.1 dB  
Base Weight: 0.043 pounds  
Additional Weight per Inch: 0.00109 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter 0.5 in [12.7 mm]  
Weight 0.043 lbs [19.5 g]

#### Cable

Cable Type RG405  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Outer Conductor 1 Material and Plating Copper  
Jacket Material Tan  
Repeated Minimum Bend Radius 0.05 in [1.27 mm]

### Connectors

Description	Connector 1	Connector 2
Type	1.85mm Female	1.85mm Female
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold over Nickel over Copper	Beryllium Copper, Gold over Nickel over Copper
Dielectric Type	PPO	PPO
Body Material and Plating	Stainless Steel, Passivated	Stainless Steel, Passivated

## 1.85mm Female to 1.85mm Female Cable Using RG405 Semi-Rigid Coax



### PE3C10445

#### Environmental Specifications

Operating Range Temperature -55 to +100 deg C

#### Compliance Certifications (see product page for current document)


#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:

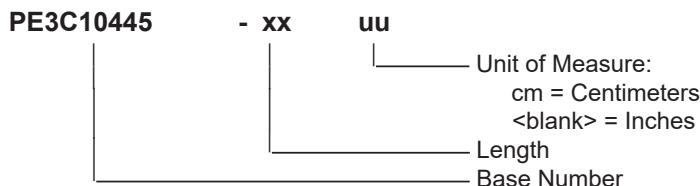

Example: PE3C10445-12 = 12 inches long cable  
PE3C10445-100cm = 100 cm long cable

1.85mm Female to 1.85mm Female Cable Using RG405 Semi-Rigid Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Female to 1.85mm Female Cable Using RG405 Semi-Rigid Coax PE3C10445](#)

URL: <https://www.pasternack.com/1.85mm-female-to-1.85mm-female-cable-using-rg405-pe3c10445-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C10445 CAD Drawing

1.85mm Female to 1.85mm Female Cable Using RG405 Semi-Rigid Coax

