

## 2.92mm Male to 1.85mm Female Bulkhead Cable Using RG405 Semi-Rigid Coax




### PE3C10447

#### Configuration

- Connector 1: 2.92mm Male
- Connector 2: 1.85mm Female Bulkhead
- Cable Type: RG405
- Coax Flex Type: Semi-Rigid

#### Features

- Max Frequency 40 GHz

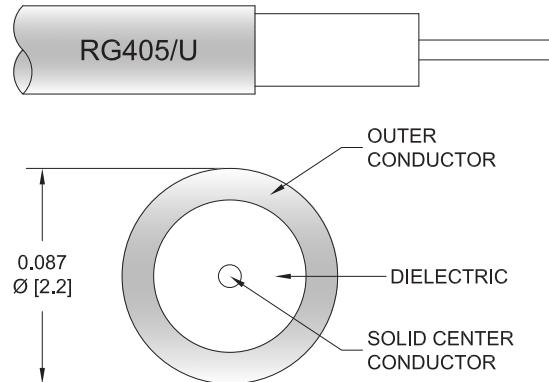

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C10447 2.92mm male to 1.85mm female bulkhead cable using RG405 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack 2.92mm to 1.85mm cable assembly has a male to female gender configuration with 50 ohm semi-rigid RG405 coax. The PE3C10447 2.92mm male to 1.85mm female cable assembly operates to 40 GHz. Our RF cable assembly with 1.85mm bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	
Dielectric Withstanding Voltage (AC)			1,000	Vrms

#### Specifications by Frequency

## 2.92mm Male to 1.85mm Female Bulkhead Cable Using RG405 Semi-Rigid Coax



### PE3C10447

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	2500	5000	10000	20000	MHz	
PE3C10447	Custom Lengths Available	Insertion Loss (Typ.)	0.316	0.477	0.8	1.2	dB/ft	
			1.04	1.57	2.63	3.94	dB/m	
PE3C10447-6	6 Inch	Insertion Loss (Typ.)	0.36	0.44	0.6	0.8	dB	0.032
PE3C10447-12	12 Inch	Insertion Loss (Typ.)	0.52	0.68	1	1.4	dB	0.038
PE3C10447-18	18 Inch	Insertion Loss (Typ.)	0.68	0.92	1.4	2	dB	0.045
PE3C10447-24	24 Inch	Insertion Loss (Typ.)	0.84	1.16	1.8	2.6	dB	0.052
PE3C10447-36	36 Inch	Insertion Loss (Typ.)	1.15	1.64	2.6	3.8	dB	0.065

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
 Loss due to Connector 2: 0.1 dB  
 Base Weight: 0.038 pounds  
 Additional Weight per Inch: 0.00109 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter 0.5 in [12.7 mm]  
 Weight 0.038 lbs [17.24 g]

#### Cable

Cable Type	RG405
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Copper
Jacket Material	Tan
Repeated Minimum Bend Radius	0.05 in [1.27 mm]

## 2.92mm Male to 1.85mm Female Bulkhead Cable Using RG405 Semi-Rigid Coax



### PE3C10447

#### Connectors

Description	Connector 1	Connector 2
Type	2.92mm Male	1.85mm Female Bulkhead
Specification		IEEE-STD-P287
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel
Contact Plating Specification	50 $\mu$ in minimum	50 $\mu$ in minimum
Dielectric Type	PCTFE	PEI
Body Material and Plating	Beryllium Copper, Gold over Nickel	Passivated Stainless Steel
Body Plating Specification	50 $\mu$ in minimum	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	
Hex Size	5/16 inch	
Torque	8 in-lbs 0.9 Nm	

#### Environmental Specifications

**Compliance Certifications** (see product page for current document)

#### Plotted and Other Data

Notes:

## 2.92mm Male to 1.85mm Female Bulkhead Cable Using RG405 Semi-Rigid Coax




### PE3C10447

#### Typical Performance Data

#### How to Order

Part Number Configuration:

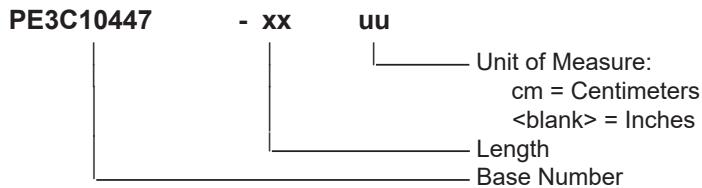

Example: PE3C10447-12 = 12 inches long cable  
PE3C10447-100cm = 100 cm long cable

2.92mm Male to 1.85mm Female Bulkhead Cable Using RG405 Semi-Rigid Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 1.85mm Female Bulkhead Cable Using RG405 Semi-Rigid Coax PE3C10447](#)

URL: <https://www.pasternack.com/2.92mm-male-to-1.85mm-female-bulkhead-cable-using-rg405-pe3c10447-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C10447 CAD Drawing

2.92mm Male to 1.85mm Female Bulkhead Cable Using RG405 Semi-Rigid Coax

