

## 2.92mm Male to 2.92mm Male Non-Magnetic Cable Using PE-SR047-NM Coax



### PE3C10848

#### Configuration

- Connector 1: 2.92mm Male
- Connector 2: 2.92mm Male
- Cable Type: PE-SR047-NM
- Coax Flex Type: Semi-Rigid

#### Features

- Max Frequency 40 GHz
- Shielding Effectivity > 165 dB
- 69.5% Phase Velocity

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C10848 2.92mm male to 2.92mm male cable using PE-SR047-NM coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack 2.92mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm semi-rigid PE-SR047-NM coax. The PE3C10848 2.92mm male to 2.92mm male cable assembly operates to 40 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	165			dB

#### Specifications by Frequency

## 2.92mm Male to 2.92mm Male Non-Magnetic Cable Using PE-SR047-NM Coax



### PE3C10848

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		2500	5000	10000		
PE3C10848	Custom Lengths Available	Insertion Loss (Typ.)	0.508	0.79	1.14	1.65	2.45	dB/ft	
			1.67	2.6	3.75	5.42	8.04	dB/m	
PE3C10848-6	6 inch	Insertion Loss (Typ.)	0.35	0.53	0.76	1.1	1.61	dB	0.202
PE3C10848-9	9 inch	Insertion Loss (Typ.)	0.48	0.73	1.05	1.51	2.22	dB	0.203
PE3C10848-12	12 inch	Insertion Loss (Typ.)	0.61	0.93	1.33	1.92	2.83	dB	0.204
PE3C10848-18	18 inch	Insertion Loss (Typ.)	0.86	1.32	1.9	2.75	4.06	dB	0.207
PE3C10848-24	24 inch	Insertion Loss (Typ.)	1.12	1.72	2.47	3.57	5.28	dB	0.209

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.03\*SQRT(FGHz) dB  
 Loss due to Connector 2: 0.03\*SQRT(FGHz) dB  
 Base Weight: 0.204 pounds  
 Additional Weight per Inch: 0.00034 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter: 0.5 in [12.7 mm]  
 Weight: 0.204 lbs [92.53 g]

#### Cable

Cable Type: PE-SR047-NM  
 Impedance: 50 Ohms  
 Inner Conductor Material and Plating: Copper, Silver  
 Dielectric Type: PTFE  
 Outer Conductor 1 Material and Plating: Copper  
 One Time Minimum Bend Radius: 0.05 in [1.27 mm]

### Connectors

Description	Connector 1	Connector 2
Type	2.92mm Male	2.92mm Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PEI	PEI
Body Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Coupling Nut Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold

## 2.92mm Male to 2.92mm Male Non-Magnetic Cable Using PE-SR047-NM Coax



### PE3C10848

#### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)


#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:

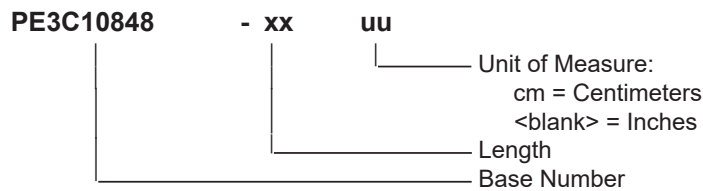

Example: PE3C10848-12 = 12 inches long cable  
PE3C10848-100cm = 100 cm long cable

2.92mm Male to 2.92mm Male Non-Magnetic Cable Using PE-SR047-NM Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Non-Magnetic Cable Using PE-SR047-NM Coax PE3C10848](#)

URL: <https://www.pasternack.com/2.92mm-male-to-2.92mm-male-non-magnetic-cable-using-pe-sr047-nm-pe3c10848-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C10848 CAD Drawing

2.92mm Male to 2.92mm Male Non-Magnetic Cable Using PE-SR047-NM Coax

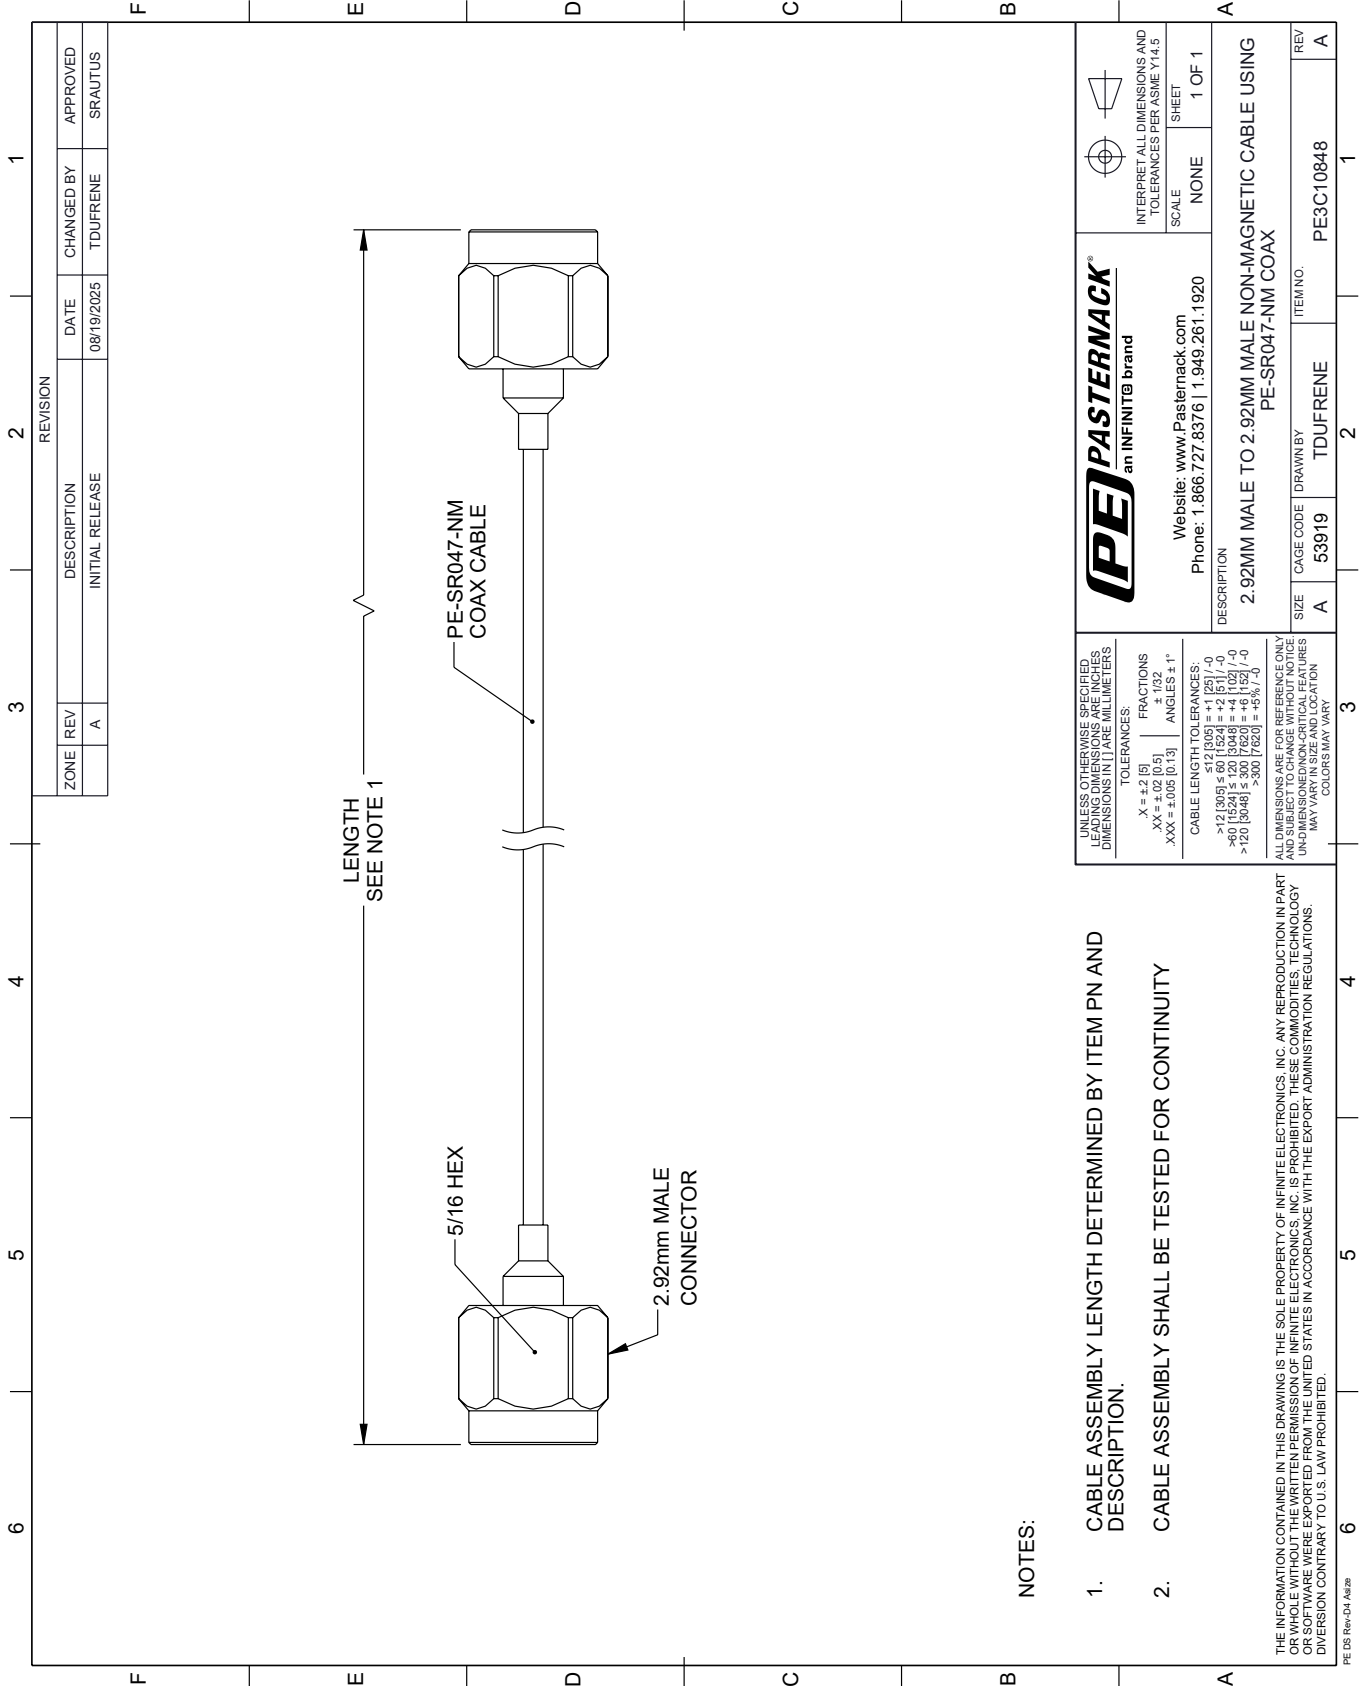

REVISION		DATE	CHANGED BY	APPROVED	
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	08/19/2025	TDUFRENE	SRAUTUS

**NOTES:**

1. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SERVICES ARE BEING EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p>an INFINITE brand</p> <p>Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a> Phone: 1.866.727.8376   1.949.261.1920</p>	<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p>
	<p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>
<p>DESCRIPTION</p> <p><b>2.92MM MALE TO 2.92MM MALE NON-MAGNETIC CABLE USING PE-SR047-NM COAX</b></p>	
<p>SIZE: A</p> <p>CAGE CODE: 53919</p>	<p>ITEM NO.: PE3C10848</p>

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES AND TRAILING DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES:  
 .X = ±.2 (5) | FRACTIONS ± 1/32 | ANGLES ± 1°  
 .XX = ±.02 (0.5) | .XXX = ±.005 (0.13)

CABLE LENGTH TOLERANCES:  
 <12 (305) ≤ 60 (1524) = ±.1 (25) / -0  
 >60 (1524) ≤ 120 (3048) = ±.4 (102) / -0  
 >120 (3048) ≤ 300 (7620) = ±.6 (152) / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

PE DS Rev-04 Add2