



N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1110

**Configuration**

- Connector 1: N Female Bulkhead
- Connector 2: TNC Male
- Cable Type: PE-P142LL

**Features**

- 83% Velocity of Propagation
- Shielding effectiveness > 95 dB
- Maximum VSWR < 1.45:1 to 18 GHz
- Minimum Bend Radius of 1 inch
- Operating Temperature range of -55 to +125°C
- ROHS and REACH Compliant
- Same day shipment of custom lengths
- 100% Continuity, Hi-Pot, and RF tested



**Description**

The PE3C1110 series high performance test cable's 0.195 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All PE3C1110 cable assemblies are 100% Continuity, Hi-POT, and RF tested to published specifications. Custom lengths are built to order and shipped same day.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.45:1	
Return Loss	14.72			dB
Velocity of Propagation		83		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS PE3C1110](#)



N Female Bulkhead to TNC Male Low Loss  
Cable Using PE-P142LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1110

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.1 [0.33]	0.14 [0.46]	0.2 [0.66]	0.29 [0.95]	0.4 [1.31]	dB/ft [dB/m]
Insertion Loss (Typ.)	0.07 [0.23]	0.1 [0.33]	0.16 [0.52]	0.23 [0.75]	0.33 [1.08]	dB/ft [dB/m]

**Electrical Specification Notes:**

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.05dB x vFrequency (GHz) per connector.

**Mechanical Specifications**

**Cable Assembly**

Diameter 0.875 in [22.23 mm]  
Weight 0.188 lbs [85.28 g]

**Cable**

Cable Type PE-P142LL  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper, Silver  
Dielectric Type PTFE  
Number of Shields 3  
Shield Layer 1 Silver Plated Copper Tape  
Shield Layer 2 Aluminum Polyester  
Shield Layer 3 Silver Plated Copper Wire  
Jacket Material FEP, Green  
Jacket Diameter 0.195 in [4.95 mm]  
  
One Time Minimum Bend Radius 1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS PE3C1110](#)



N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1110

**Connectors**

Description	Connector 1	Connector 2
Type	N Female Bulkhead	TNC Male
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	ASTM-B488, 50µ in. minimum	ASTM-B488, 50µ in. minimum
Dielectric Type	PEI	PEI
Outer Conductor Material and Plating	Passivated Stainless Steel	
Outer Conductor Plating Specification	SAE-AMS-2700	
Coupling Nut Material and Plating		Passivated Stainless Steel
Coupling Nut Plating Specification		SAE-AMS-2701
Hex Size		9/16 Inch
Torque		12 in-lbs [1.36 Nm]
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2701

**Environmental Specifications**

**Temperature**

Operating Range -55 to +125 deg C

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant Yes  
 REACH Compliant 12/17/2015

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS PE3C1110](#)



N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1110

**How to Order**

Part Number Configuration:

**PE3C1110**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C1110-12 = 12 inches long cable  
PE3C1110-100cm = 100 cm long cable

N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS PE3C1110](https://www.pasternack.com/n-female-tnc-male-pe-p142ll-cable-assembly-pe3c1110-p.aspx)

URL: <https://www.pasternack.com/n-female-tnc-male-pe-p142ll-cable-assembly-pe3c1110-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C1110 CAD Drawing

N Female Bulkhead to TNC Male Low Loss Cable Using PE-P142LL Coax, RoHS

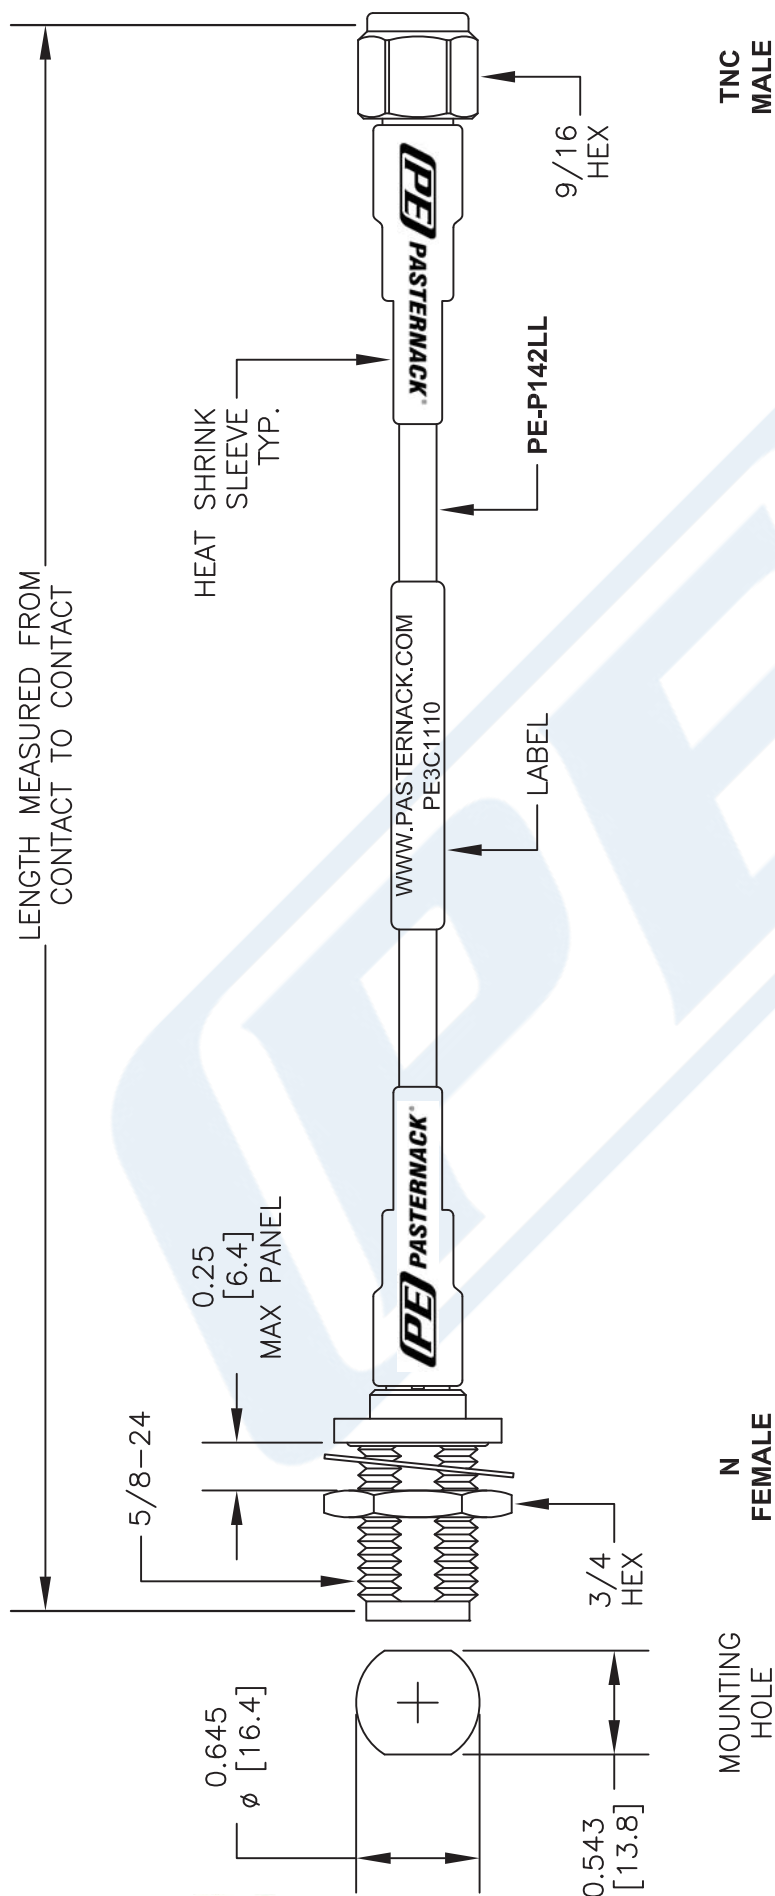

**NOTE:**  
LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED. 48" OR LONGER WILL BE 12" AWAY FROM CONNECTOR.

Part Number Configuration		How To Order	
PE3	[zzz] [yy] - [xx] [uu]	Part # Ext.	Length In Inches
00 - 99999	[Blank] > = Standard	-12	12"
LF = RoHS Compliant	[Blank] > = Standard	-24	24"
LF = RoHS Compliant	[Blank] > = Standard	-36	36"
LF = RoHS Compliant	[Blank] > = Standard	-48	48"
LF = RoHS Compliant	[Blank] > = Standard	-60	60"
LF = RoHS Compliant	[Blank] > = Standard	-xx	Custom Length
LF applies only to RF cables	[Blank] > = Standard	-25CM	25Cm
		-50CM	50Cm
		-75CM	75Cm
		-100CM	100Cm
		-125CM	125Cm
		-xxCM	Custom Length

**NOTES:**  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE  
**PE3C1110**

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAD FILE 072914 SCALE N/A SIZE A 2233

FSCM NO. 53919

FSCM NO. 53919