

SMA Female Bulkhead to MMCX Plug Right Angle Cable Using PE-SR405FL Coax




PE3C1115

Configuration

- Connector 1: SMA Female Bulkhead
- Connector 2: MMCX Plug Right Angle
- Cable Type: PE-SR405FL
- Coax Flex Type: Formable

Features

- Max Frequency 6 GHz
- 69.5% Phase Velocity

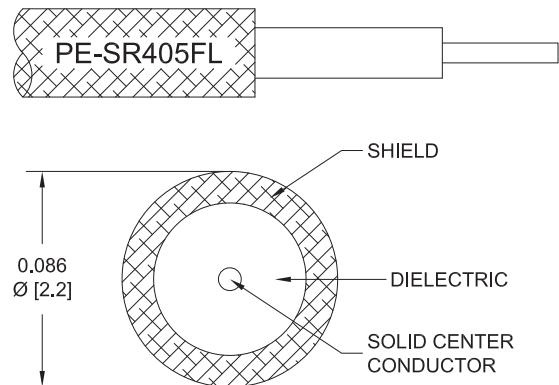

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1115 SMA female bulkhead to MMCX plug right angle cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to MMCX cable assembly has a female to plug gender configuration with 50 ohm formable PE-SR405FL coax. The PE3C1115 SMA female to MMCX plug cable assembly operates to 6 GHz. The right angle MMCX interface on the PE-SR405FL cable allows for easier connections in tight spaces. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]

Specifications by Frequency

SMA Female Bulkhead to MMCX Plug Right Angle Cable Using PE-SR405FL Coax



PE3C1115

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
			Frequency				MHz	
PE3C1115	Custom Lengths Available	Insertion Loss (Typ.)	0.15	0.22	0.34	0.06	dB/ft	
			0.5	0.73	1.12	0.2	dB/m	
PE3C1115-6	6 inch	Insertion Loss (Typ.)	0.38	0.41	0.47	0.33	dB	0.023
PE3C1115-9	9 inch	Insertion Loss (Typ.)	0.42	0.47	0.56	0.35	dB	0.026
PE3C1115-12	12 inch	Insertion Loss (Typ.)	0.45	0.52	0.64	0.36	dB	0.028
PE3C1115-24	24 inch	Insertion Loss (Typ.)	0.6	0.74	0.98	0.42	dB	0.04
PE3C1115-36	36 inch	Insertion Loss (Typ.)	0.75	0.96	1.32	0.48	dB	0.051

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.028 pounds
Additional Weight per Inch:	0.00092 pounds

Mechanical Specifications

Cable Assembly

Weight 0.028 lbs [12.7 g]

Cable

Cable Type	PE-SR405FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid

Connectors

Description	Connector 1	Connector 2
Type	SMA Female Bulkhead	MMCX Plug Right Angle
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Beryllium Copper, Gold	Phosphor Bronze, Gold over Nickel
Contact Plating Specification	50 µin minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Stainless Steel, Gold	Brass, Gold over Nickel
Body Plating Specification	30 µin minimum	

SMA Female Bulkhead to MMCX Plug Right Angle Cable Using PE-SR405FL Coax



PE3C1115

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:
Values at 25°C, sea level.

Typical Performance Data

How to Order

Part Number Configuration:

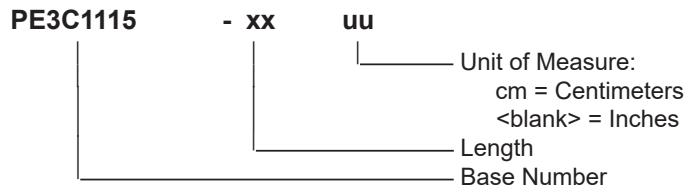

Example: PE3C1115-12 = 12 inches long cable
PE3C1115-100cm = 100 cm long cable

SMA Female Bulkhead to MMCX Plug Right Angle Cable Using PE-SR405FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to MMCX Plug Right Angle Cable Using PE-SR405FL Coax PE3C1115](#)

URL: <https://www.pasternack.com/sma-female-bulkhead-to-mmcx-plug-cable-using-pe-sr405fl-pe3c1115-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C1115 CAD Drawing

SMA Female Bulkhead to MMCX Plug Right Angle Cable Using PE-SR405FL Coax

