

BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder



RF Cable Assemblies Technical Data Sheet



PE3C1527LF/HS

Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: RG316-DS

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 85 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket

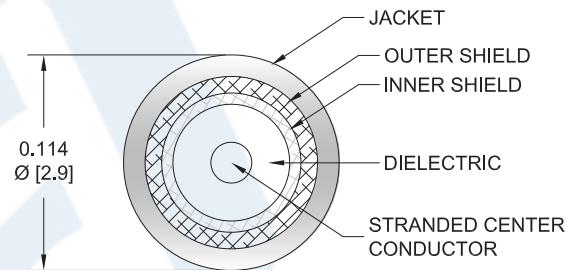

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1527LF/HS BNC male to BNC male cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG316-DS coax. The PE3C1527LF/HS BNC male to BNC male cable assembly operates to 3 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 85 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder PE3C1527LF/HS](#)

BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder


RF Cable Assemblies Technical Data Sheet
PE3C1527LF/HS
Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		69.5		%
RF Shielding	85			dB
Capacitance		28.96 [95.01]		pF/ft [pF/m]
DC Resistance Inner Conductor		83.82 [275]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		5.33 [17.49]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			335	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.11	0.16	0.238	0.379	0.579	dB/ft
	0.36	0.52	0.78	1.24	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector.

Mechanical Specifications
Cable Assembly

Weight 0.069 lbs [31.3 g]

Cable

Cable Type	RG316-DS
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.114 in [2.9 mm]
One Time Minimum Bend Radius	0.59 in [14.99 mm]
Repeated Minimum Bend Radius	1.57 in [39.88 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder PE3C1527LF/HS](#)

BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder


RF Cable Assemblies Technical Data Sheet
PE3C1527LF/HS
Connectors

Description	Connector 1	Connector 2
Type	BNC Male	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 μ in. minimum	50 μ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in. minimum	100 μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in. minimum	100 μ in. minimum

Environmental Specifications
Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder PE3C1527LF/HS](#)

BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder



RF Cable Assemblies Technical Data Sheet

PE3C1527LF/HS

How to Order

Part Number Configuration:

PE3C1527LF/HS - xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C1527LF/HS-12 = 12 inches long cable
PE3C1527LF/HS-100cm = 100 cm long cable

BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder PE3C1527LF/HS](#)

URL: <https://www.pasternack.com/bnc-male-to-bnc-male-cable-using-rg316-ds-with-heatshrink-lf-solder-pe3c1527lf-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C1527LF/HS CAD Drawing

BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder

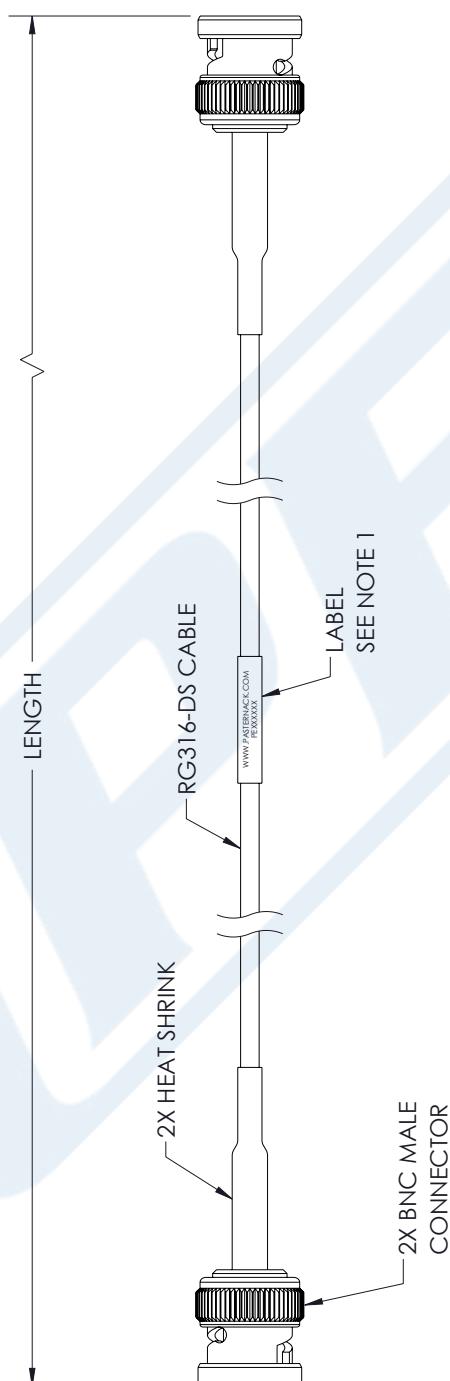

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS , ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

PASTERNAK® an INFINITI® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: <input type="checkbox"/> NONE SHEET <input type="checkbox"/> 1 OF 1
Website: www.Pasternak.com Phone: 1.866.727.8376 1.949.261.1920 DESCRIPTION BNC Male to BNC Male Cable Using RG316-DS Coax with HeatShrink, LF Solder		

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: $X = \pm .2$ [5.1] FRACTIONS: $XX = \pm .02$ [5.] $\pm 1/32$ $XXX = \pm .005$ [1.3] ANGLES $\pm 1^\circ$ CABLE LENGTH TOLERANCES: $>12 [305] = +1 [25] / -0$ $>12 [305] \leq 60 [1524] = +2 [51] / -0$ $>60 [1524] \leq 120 [3048] = +4 [102] / -0$ $>120 [3048] \leq 300 [7620] = +6 [152] / -0$ $>300 [7620] = +8\% / -0$	SIZE <input type="checkbox"/> A DRAWN BY <input type="checkbox"/> BPUCHASKI ITEM NO. <input type="checkbox"/> PE3C1527LF/HS	REV <input type="checkbox"/> A
--	---	--------------------------------