

## SMA Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink




### PE3C1761/HS

#### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: LMR-200
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- PE Jacket

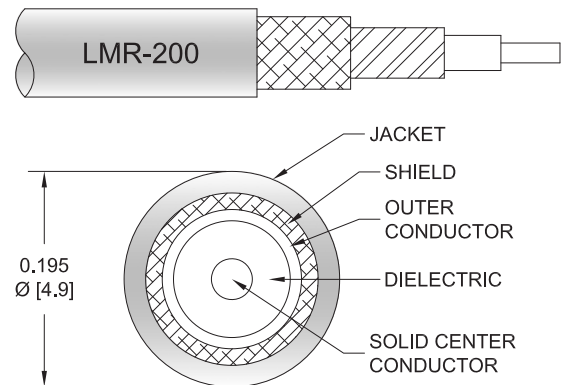

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C1761/HS SMA male right angle to type N male right angle cable using LMR-200 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-200 coax. The PE3C1761/HS SMA male to type N male cable assembly operates to 6 GHz. The right angle SMA and right angle type N interfaces on the LMR-200 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
RF Shielding	90			dB
Group Delay		1.22 [4]		ns/ft [ns/m]
Capacitance		24.5 [80.38]		pF/ft [pF/m]
Inductance		0.061 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		5.36 [17.59]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ohms/1000ft [Ohms/Km]

## SMA Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink



### PE3C1761/HS

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			3,000	Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency					MHz	
PE3C1761/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.051	0.073	0.104	0.169	0.264	dB/ft	
			0.17	0.24	0.35	0.56	0.87	dB/m	
PE3C1761/HS-24	24 inch	Insertion Loss (Typ.)	0.51	0.55	0.61	0.74	0.93	dB	0.173
PE3C1761/HS-36	36 inch	Insertion Loss (Typ.)	0.56	0.62	0.72	0.91	1.2	dB	0.197
PE3C1761/HS-48	48 inch	Insertion Loss (Typ.)	0.61	0.7	0.82	1.08	1.46	dB	0.221
PE3C1761/HS-60	60 inch	Insertion Loss (Typ.)	0.66	0.77	0.92	1.25	1.72	dB	0.245
PE3C1761/HS-72	72 inch	Insertion Loss (Typ.)	0.71	0.84	1.03	1.42	1.99	dB	0.269

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.149 pounds
Additional Weight per Inch:	0.002 pounds

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.12 lbs [54.43 g]

##### Cable

Cable Type	LMR-200
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

SMA Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink



**PE3C1761/HS**

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	N Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Nickel
Coupling Nut Material and Plating	Brass, Gold	Brass, Nickel

**Environmental Specifications**

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

## SMA Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink




### PE3C1761/HS

#### Typical Performance Data

#### How to Order

Part Number Configuration:

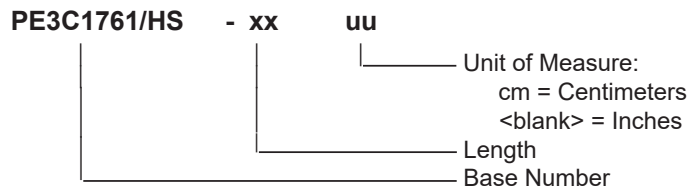

Example: PE3C1761/HS-12 = 12 inches long cable  
PE3C1761/HS-100cm = 100 cm long cable

SMA Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink PE3C1761/HS](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-n-male-low-loss-cable-using-lmr-200-with-heatshrink-pe3c1761-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C1761/HS CAD Drawing

SMA Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink

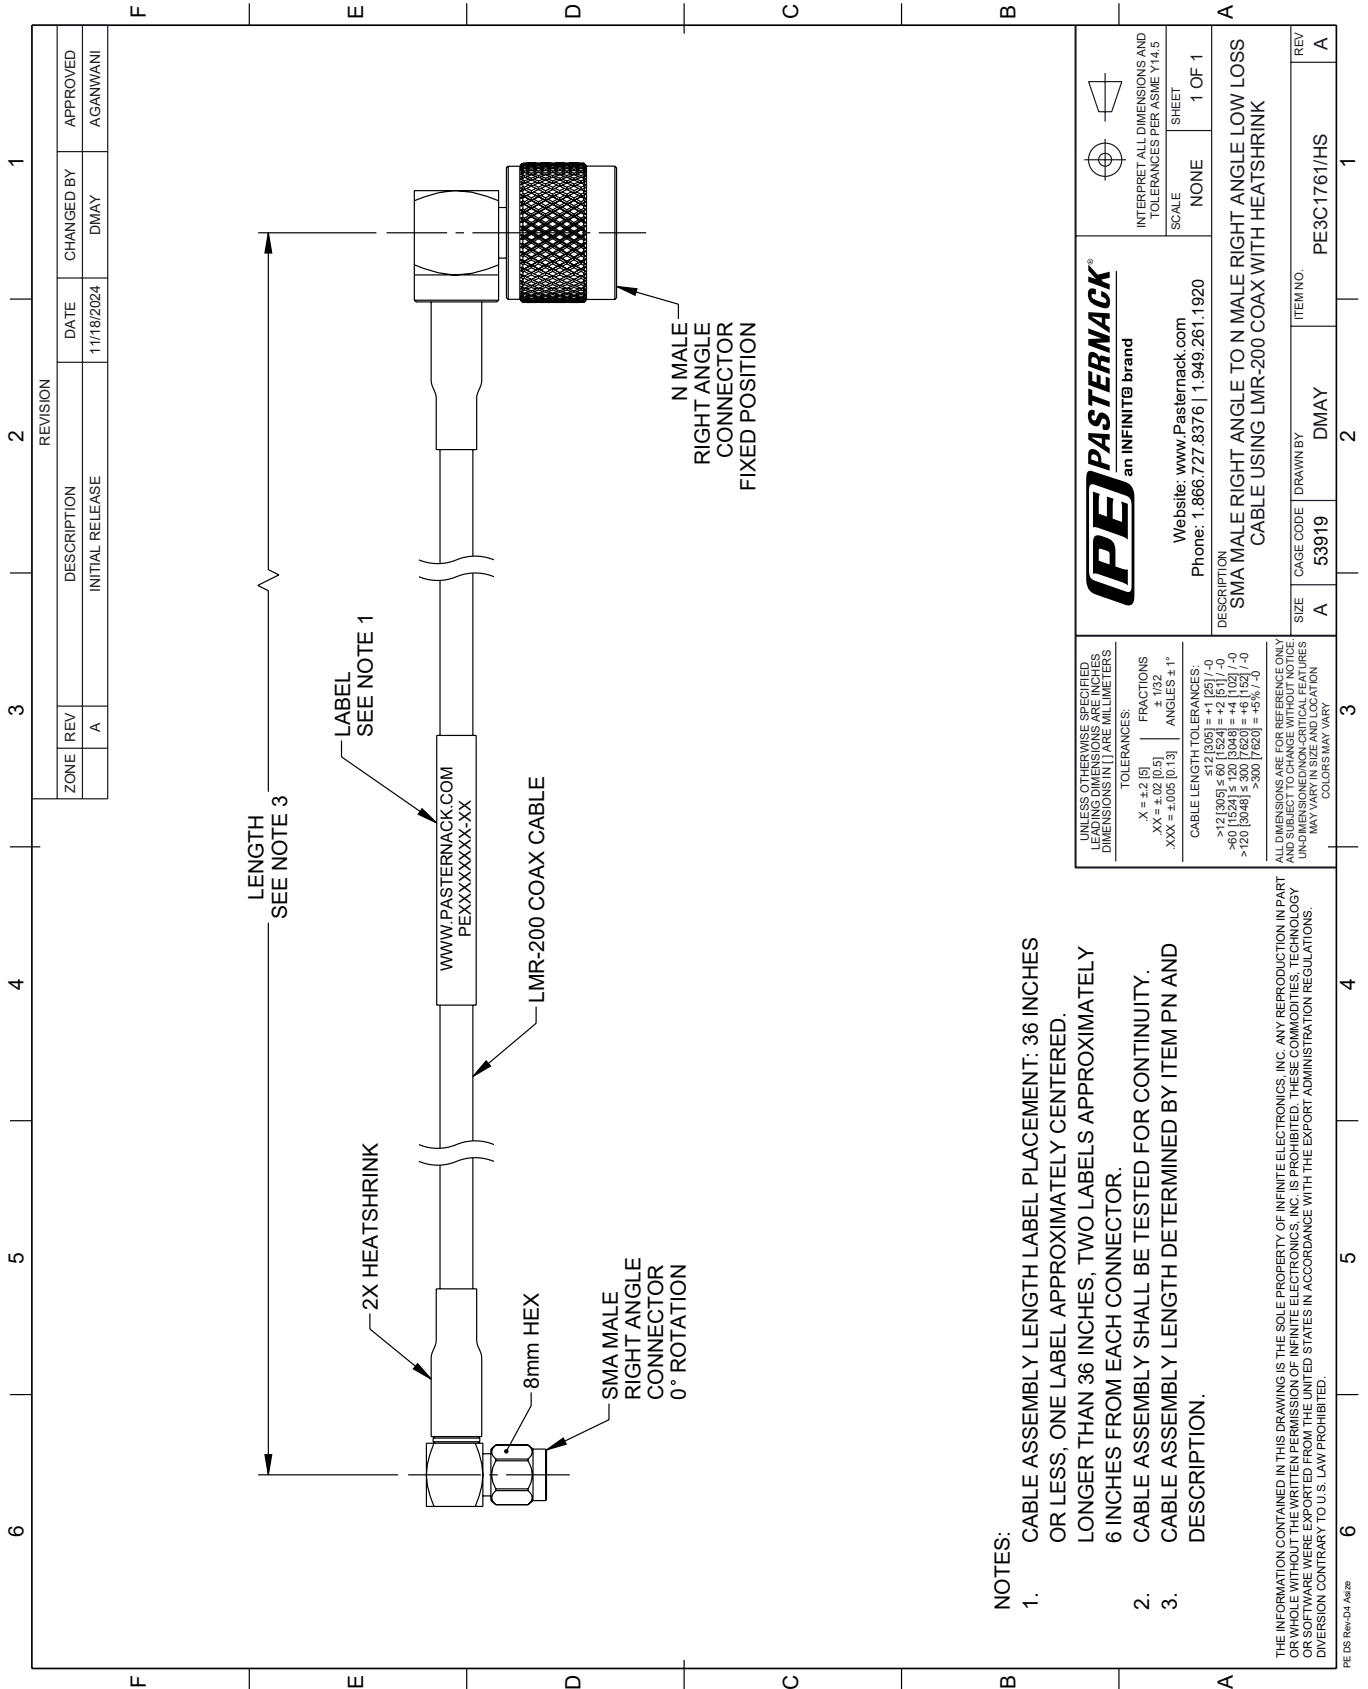

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
A		INITIAL RELEASE	11/18/2024	DMAY	AGANWANI

REVISION	DATE	CHANGED BY	APPROVED
1	11/18/2024	DMAY	AGANWANI

LENGTH SEE NOTE 3

LABEL SEE NOTE 1

2X HEATSHRINK

8mm HEX

SMA MALE RIGHT ANGLE CONNECTOR 0° ROTATION

WWW.PASTERNAK.COM PEXXXXXXXXX-XX

LMR-200 COAX CABLE

N MALE RIGHT ANGLE CONNECTOR FIXED POSITION

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SERVICES ARE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p><b>PASTERNAK</b> an INFINITE brand</p>	<p>Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a></p> <p>Phone: 1.866.727.8376   1.949.281.1920</p>	<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>
	<p>DESCRIPTION</p> <p>SMA MALE RIGHT ANGLE TO N MALE RIGHT ANGLE LOW LOSS CABLE USING LMR-200 COAX WITH HEATSHRINK</p>	<p>SIZE: A</p> <p>CAGE CODE: 53919</p> <p>DRAWN BY: DMAY</p> <p>ITEM NO.: PE3C1761/HS</p>

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE MILLIMETERS.

TOLERANCES:

.X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	

CABLE LENGTH TOLERANCES:

>12 [305] ≤ 60 [1524] = ±.1 [2.5] / -0
>60 [1524] ≤ 120 [3048] = ±.4 [102] / -0
>120 [3048] ≤ 300 [7620] = ±.6 [15.2] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE MILLIMETERS. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE MILLIMETERS. COLORS MAY VARY.