

SMA Female to SSMA Male Cable Using PE-SR405FL Coax




PE3C1871

Configuration

- Connector 1: SMA Female
- Connector 2: SSMA Male
- Cable Type: PE-SR405FL
- Coax Flex Type: Formable

Features

- Max Frequency 18 GHz
- 69.5% Phase Velocity

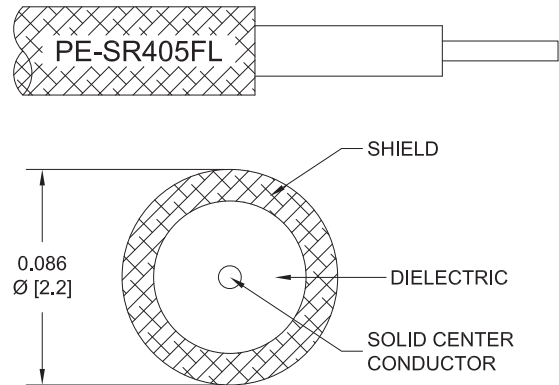

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1871 SMA female to SSMA male cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SSMA cable assembly has a female to male gender configuration with 50 ohm formable PE-SR405FL coax. The PE3C1871 SMA female to SSMA male cable assembly operates to 18 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]

Specifications by Frequency

SMA Female to SSMA Male Cable Using PE-SR405FL Coax



PE3C1871

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	1000	2000	4500	9000	18000	MHz	
PE3C1871	Custom Lengths Available	Insertion Loss (Typ.)	0.22	0.3	0.5	0.75	1.12	dB/ft	
			0.73	0.99	1.65	2.47	3.68	dB/m	
PE3C1871-6	6 inch	Insertion Loss (Typ.)	0.31	0.35	0.45	0.58	0.76	dB	0.016
PE3C1871-9	9 inch	Insertion Loss (Typ.)	0.37	0.43	0.58	0.77	1.04	dB	0.019
PE3C1871-12	12 inch	Insertion Loss (Typ.)	0.42	0.5	0.7	0.95	1.32	dB	0.021
PE3C1871-24	24 inch	Insertion Loss (Typ.)	0.64	0.8	1.2	1.7	2.44	dB	0.033
PE3C1871-36	36 inch	Insertion Loss (Typ.)	0.86	1.1	1.7	2.45	3.56	dB	0.044

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
 Loss due to Connector 2: 0.1 dB
 Base Weight: 0.021 pounds
 Additional Weight per Inch: 0.00092 pounds

Mechanical Specifications

Cable Assembly

Weight 0.021 lbs [9.53 g]

Cable

Cable Type PE-SR405FL
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Tinned Copper Braid

SMA Female to SSMA Male Cable Using PE-SR405FL Coax



PE3C1871

Connectors

Description	Connector 1	Connector 2
Type	SMA Female	SSMA Male
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Gold
Contact Plating Specification		MIL-G-45204
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification		MIL-G-45204
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		QQ-N-290
Hex Size		1/4 in.
Torque		3 in-lbs 0.34 Nm

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

SMA Female to SSMA Male Cable Using PE-SR405FL Coax



PE3C1871

Typical Performance Data

How to Order

Part Number Configuration:

PE3C1871

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C1871-12 = 12 inches long cable
PE3C1871-100cm = 100 cm long cable

SMA Female to SSMA Male Cable Using PE-SR405FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to SSMA Male Cable Using PE-SR405FL Coax PE3C1871](#)

URL: <https://www.pasternack.com/sma-female-to-ssma-male-cable-using-pe-sr405fl-pe3c1871-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C1871 CAD Drawing
SMA Female to SSMA Male Cable Using PE-SR405FL Coax

