

MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet


PE3C1872/HS

Configuration

- Connector 1: MMCX Plug
- Connector 2: MMCX Plug
- Cable Type: PE-P047

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

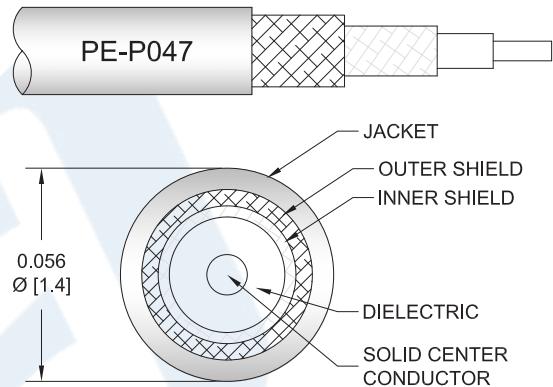

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1872/HS MMCX plug to MMCX plug cable using PE-P047 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MMCX to MMCX cable assembly has a plug to plug gender configuration with 50 ohm flexible PE-P047 coax. The PE3C1872/HS MMCX plug to MMCX plug cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink PE3C1872/HS](#)

MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C1872/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
RF Shielding	90			dB
Capacitance		29 [95.14]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2.5	6			GHz
Insertion Loss (Typ.)	0.335	0.539	0.869			dB/ft
	1.1	1.77	2.85			dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight	0.043 lbs [19.5 g]
Cable	
Cable Type	PE-P047
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	FEP
Number of Shields	2
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Blue
Jacket Diameter	0.056 in [1.42 mm]
One Time Minimum Bend Radius	0.2 in [5.08 mm]
Repeated Minimum Bend Radius	0.4 in [10.16 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink PE3C1872/HS](#)

MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink


RF Cable Assemblies Technical Data Sheet
PE3C1872/HS
Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug	MMCX Plug
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold

Environmental Specifications
Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink PE3C1872/HS](#)

MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C1872/HS

How to Order

Part Number Configuration:

PE3C1872/HS - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C1872/HS-12 = 12 inches long cable
PE3C1872/HS-100cm = 100 cm long cable

MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink PE3C1872/HS](#)

URL: <https://www.pasternack.com/mmcx-plug-to-mmcx-plug-cable-using-pe-p047-with-heatshrink-pe3c1872-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C1872/HS CAD Drawing

MMCX Plug to MMCX Plug Cable Using PE-P047 Coax with HeatShrink

