



BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder

TECHNICAL DATA SHEET


PE3C1929LF/HS

Configuration

- Connector 1: BNC Male
- Connector 2: SMA Male
- Cable Type: PE-P195
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- 70% Phase Velocity
- Triple Shielded
- FEP Jacket

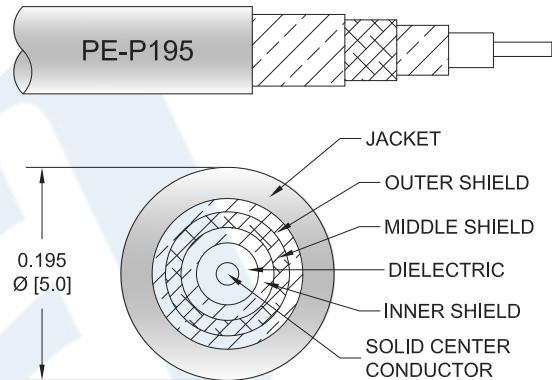

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1929LF/HS BNC male to SMA male cable using PE-P195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMA cable assembly has a male to male gender configuration with 50 ohm flexible PE-P195 coax. The PE3C1929LF/HS BNC male to SMA male cable assembly operates to 4 GHz. The triple shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder PE3C1929LF/HS](#)



BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder

TECHNICAL DATA SHEET

PE3C1929LF/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		29 [95.14]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	4000		
PE3C1929LF/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.04	0.06	0.088	0.125	0.268	MHz	
			0.13	0.19	0.29	0.42	0.88	dB/ft	
PE3C1929LF/HS-12	12 inch	Insertion Loss (Typ.)	0.24	0.26	0.29	0.33	0.47	dB	0.081
PE3C1929LF/HS-24	24 inch	Insertion Loss (Typ.)	0.28	0.32	0.38	0.45	0.74	dB	0.12
PE3C1929LF/HS-36	36 inch	Insertion Loss (Typ.)	0.32	0.38	0.47	0.58	1.01	dB	0.158
PE3C1929LF/HS-60	60 inch	Insertion Loss (Typ.)	0.4	0.49	0.64	0.83	1.54	dB	0.234
PE3C1929LF/HS-72	72 inch	Insertion Loss (Typ.)	0.44	0.55	0.73	0.95	1.81	dB	0.272

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.081 pounds
Additional Weight per Inch:	0.00317 pounds

Mechanical Specifications

Cable Assembly

Weight	0.081 lbs [36.74 g]
--------	---------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder PE3C1929LF/HS](#)



BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder

TECHNICAL DATA SHEET

PE3C1929LF/HS

Cable

Cable Type	PE-P195
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	3
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Aluminum Tape
Shield Layer 3	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.195 in [4.95 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2
Type	BNC Male Bayonet	SMA Male Threaded
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	50 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	90 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification		100 μ in minimum
Hex Size		5/16 inch
Torque		3 in-lbs [0.34 Nm]

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder PE3C1929LF/HS](#)



BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder

TECHNICAL DATA SHEET

PE3C1929LF/HS

How to Order

Part Number Configuration:

PE3C1929LF/HS - xx**uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C1929LF/HS-12 = 12 inches long cable
PE3C1929LF/HS-100cm = 100 cm long cable

BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder PE3C1929LF/HS](#)

URL: <https://www.pasternack.com/bnc-male-to-sma-male-cable-using-pe-p195-with-heatshrink-lf-solder-pe3c1929lf-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C1929LF/HS CAD Drawing

BNC Male to SMA Male Cable Using PE-P195 Coax with HeatShrink, LF Solder

