

TNC Male to N Male Low Loss Cable Using
LMR-400-DB Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet


PE3C1964/HS

Configuration

- Connector 1: TNC Male
- Connector 2: N Male
- Cable Type: LMR-400-DB

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket

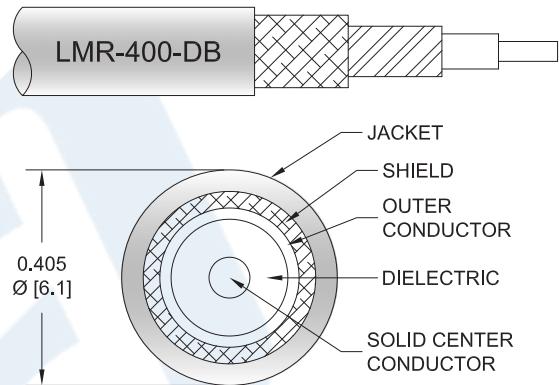

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1964/HS TNC male to type N male cable using LMR-400-DB coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400-DB coax. The PE3C1964/HS TNC male to type N male cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink PE3C1964/HS](#)



TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C1964/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.39 [4.56]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			500	Vrms
Jacket Spark			8,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	6	GHz
Insertion Loss (Typ.)	0.02	0.028	0.041	0.068	0.108	dB/ft
	0.07	0.09	0.13	0.22	0.35	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.212 lbs [96.16 g]

Cable

Cable Type LMR-400-DB
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Aluminum
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material PE, Black
Jacket Diameter 0.405 in [10.29 mm]

One Time Minimum Bend Radius 1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink PE3C1964/HS](#)



TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C1964/HS

Repeated Minimum Bend Radius
Bending Moment
Flat Plate Crush
Tensile Strength

4 in [101.6 mm]
0.5 lbs-ft [0.68 N-m]
40 lbs/in [0.71 Kg/mm]
160 lbs [72.57 Kg]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male	N Male
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Gold
Contact Plating Specification	ASTM-B700	15 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Body Plating Specification	ASTM-B689	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Tri-Metal
Coupling Nut Plating Specification	ASTM-B689	
Hex Size		18 mm

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink PE3C1964/HS](#)




TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C1964/HS

How to Order

Part Number Configuration:

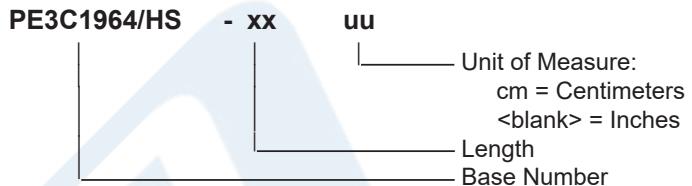

Example: PE3C1964/HS-12 = 12 inches long cable
PE3C1964/HS-100cm = 100 cm long cable

TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink PE3C1964/HS](#)

URL: <https://www.pasternack.com/tnc-male-to-n-male-low-loss-cable-using-lmr-400-db-with-heatshrink-pe3c1964-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C1964/HS CAD Drawing

TNC Male to N Male Low Loss Cable Using LMR-400-DB Coax with HeatShrink

