



SMA Male to BNC Male Cable 48 Inch Length  
Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C2035LF-48

**Configuration**

- Connector 1: SMA Male
- Connector 2: BNC Male
- Cable Type: RG188

**Electrical Specifications**

| Description     | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | DC      |         | 3       | GHz   |
| VSWR            |         |         | 1.4:1   |       |

**Specifications by Frequency**

| Description           | F1    | F2     | F3     | F4     | F5     | Units |
|-----------------------|-------|--------|--------|--------|--------|-------|
| Frequency             | 0.1   | 0.25   | 0.5    | 1      | 3      | GHz   |
| Insertion Loss (Max.) | 0.4   | 0.7    |        |        |        | dB    |
| Insertion Loss (Typ.) | 0.4   | 0.7    |        |        |        | dB    |
| VSWR (Max.)           | 1.4:1 | 1.4:1  | 1.4:1  | 1.4:1  | 1.4:1  |       |
| Return Loss (Max.)    | 15.56 | 15.563 | 15.563 | 15.563 | 15.563 | dB    |

**Mechanical Specifications**

**Cable Assembly**

Length\* 48 in [121.92 cm]  
Diameter 0.57 in [14.48 mm]

**Cable**

Cable Type RG188  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Shield Layer 1 Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable 48 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C2035LF-48](#)



SMA Male to BNC Male Cable 48 Inch Length  
 Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C2035LF-48

Jacket Material PTFE, White  
 Jacket Diameter 0.11 in [2.79 mm]

**Connectors**

| Description                        | Connector 1        | Connector 2      |
|------------------------------------|--------------------|------------------|
| Type                               | SMA Male           | BNC Male         |
| Specification                      | MIL-STD-348A       | MIL-STD-348A     |
| Impedance                          | 50 Ohms            | 50 Ohms          |
| Contact Material and Plating       | Brass, Gold        | Brass, Gold      |
| Contact Plating Specification      | 30 µin minimum     | 50µ in. minimum  |
| Dielectric Type                    | PTFE               | Teflon           |
| Body Material and Plating          | Brass, Nickel      | Brass, Nickel    |
| Body Plating Specification         | 100 µin minimum    | 100µ in. minimum |
| Coupling Nut Material and Plating  | Brass, Nickel      | Brass, Nickel    |
| Coupling Nut Plating Specification | 100 µin minimum    | 100µ in. minimum |
| Hex Size                           | 5/16 inch          |                  |
| Torque                             | 3 in-lbs [0.34 Nm] |                  |

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable 48 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C2035LF-48](#)



SMA Male to BNC Male Cable 48 Inch Length  
Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C2035LF-48

**How to Order**

Part Number Configuration:

**PE3C2035LF - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C2035LF-12 = 12 inches long cable  
PE3C2035LF-100cm = 100 cm long cable

SMA Male to BNC Male Cable 48 Inch Length Using RG188 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable 48 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C2035LF-48](#)

URL: <https://www.pasternack.com/sma-male-bnc-male-rg188au-cable-assembly-pe3c2035lf-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C2035LF-48 CAD Drawing

SMA Male to BNC Male Cable 48 Inch Length Using RG188 Coax, LF Solder, RoHS

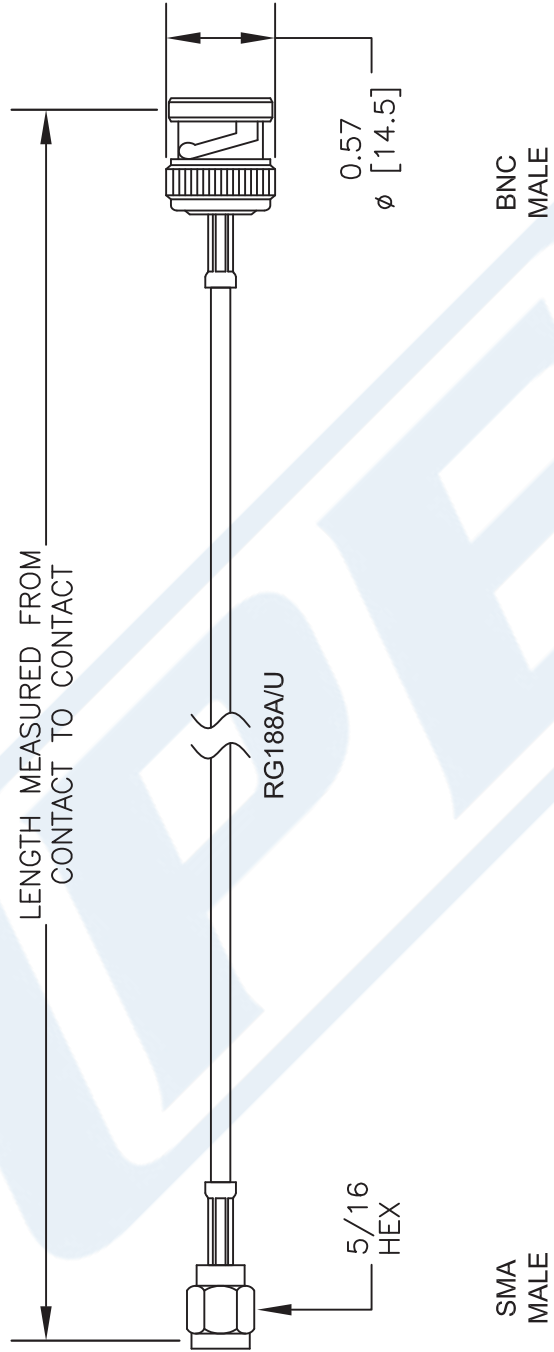

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES (mm).  
 4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE  
**PE3C2035LF**

**(PE) PASTERNAK®**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

|          |        |       |     |      |   |      |
|----------|--------|-------|-----|------|---|------|
| CAD FILE | 102116 | SCALE | N/A | SIZE | A | 2233 |
|----------|--------|-------|-----|------|---|------|

FSCM NO. 53919