

## N Male to N Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components




### PE3C2080

#### Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: LMR-400-UF
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket

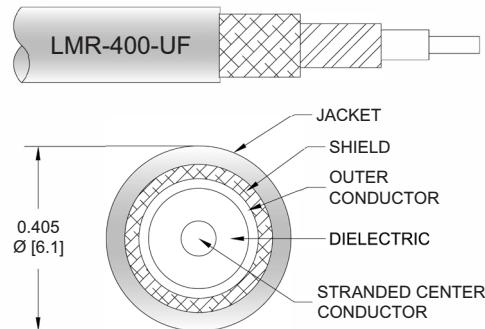

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C2080 type N male to type N male cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3C2080 type N male to type N male cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.07 [3.51]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)			1,500	Vrms

## N Male to N Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components



### PE3C2080

#### Electrical Specifications

Description	Minimum	Typical					Maximum	Units
Jacket Spark						8,000		Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3C2080	Custom Lengths Available	Insertion Loss (Typ.)	0.023	0.035	0.05	0.081	0.112	dB/ft	
			0.08	0.12	0.17	0.27	0.37	dB/m	
PE3C2080-12	12 inch	Insertion Loss (Typ.)	0.23	0.24	0.25	0.29	0.32	dB	0.289
PE3C2080-24	24 inch	Insertion Loss (Typ.)	0.25	0.27	0.3	0.37	0.43	dB	0.376
PE3C2080-36	36 inch	Insertion Loss (Typ.)	0.27	0.31	0.35	0.45	0.54	dB	0.463
PE3C2080-60	60 inch	Insertion Loss (Typ.)	0.32	0.38	0.45	0.61	0.76	dB	0.637
PE3C2080-300	300 inch	Insertion Loss (Typ.)	0.78	1.08	1.45	2.23	3	dB	2.377

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
Loss due to Connector 2: 0.1 dB  
Base Weight: 0.289 pounds  
Additional Weight per Inch: 0.00725 pounds

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter 0.5 in [12.7 mm]  
Weight 0.289 lbs [131.09 g]

##### Cable

Cable Type LMR-400-UF  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper  
Dielectric Type PE (F)  
Number of Shields 2  
Shield Layer 1 Aluminum Tape  
Shield Layer 2 Tinned Copper Braid  
Jacket Material TPE, Black  
Jacket Diameter 0.405 in [10.29 mm]  
One Time Minimum Bend Radius 1 in [25.4 mm]  
Repeated Minimum Bend Radius 4 in [101.6 mm]  
Bending Moment 0.38 lbs-ft [0.52 N-m]  
Flat Plate Crush 20 lbs/in [0.36 Kg/mm]  
Tensile Strength 160 lbs [72.57 Kg]

## N Male to N Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components



### PE3C2080

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 $\mu$ in. minimum	50 $\mu$ in. minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	150 $\mu$ in. minimum	150 $\mu$ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	150 $\mu$ in. minimum	150 $\mu$ in. minimum
Hex Size	13/16 inch	13/16 inch

#### Environmental Specifications

Operating Range Temperature -40 to +85 deg C

#### Compliance Certifications

(see product page for current document)

#### Plotted and Other Data

Notes:

## N Male to N Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components




### PE3C2080

#### Typical Performance Data

#### How to Order

Part Number Configuration:

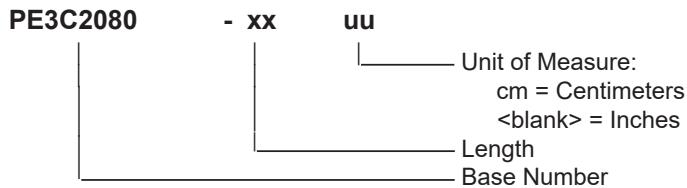

Example: PE3C2080-12 = 12 inches long cable  
PE3C2080-100cm = 100 cm long cable

N Male to N Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components PE3C2080](#)

URL: <https://www.pasternack.com/n-male-to-n-male-low-loss-cable-using-lmr-400-uf-pe3c2080-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C2080 CAD Drawing

N Male to N Male Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components

