

## SMA Male to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder




### PE3C2486LF

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: LMR-240-UF
- Coax Flex Type: Flexible

#### Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket
- 500 Mating Cycles

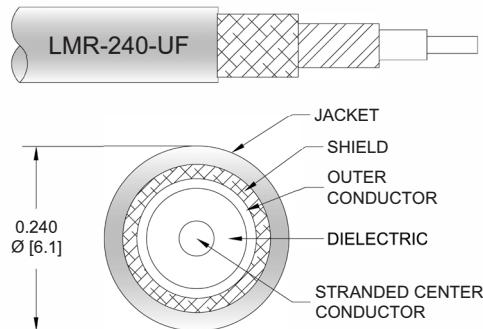

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C2486LF SMA male to SMA male cable using LMR-240-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-UF coax. The PE3C2486LF SMA male to SMA male cable assembly operates to 8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)			333	Vrms

## SMA Male to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder



### PE3C2486LF

#### Electrical Specifications

Description	Minimum	Typical					Maximum	Units
Dielectric Withstanding Voltage (AC)						1,000		Vrms
Jacket Spark						5,000		Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units MHz	Weight (lbs)
		Frequency	500	1000	2000	4000	8000		
PE3C2486LF	Custom Lengths Available	Insertion Loss (Typ.)	0.066	0.096	0.138	0.155	0.244	dB/ft	
			0.22	0.32	0.46	0.51	0.81	dB/m	
PE3C2486LF-12	12 inch	Insertion Loss (Typ.)	0.27	0.3	0.34	0.36	0.45	dB	0.058
PE3C2486LF-24	24 inch	Insertion Loss (Typ.)	0.34	0.4	0.48	0.51	0.69	dB	0.091
PE3C2486LF-36	36 inch	Insertion Loss (Typ.)	0.4	0.49	0.62	0.67	0.94	dB	0.123
PE3C2486LF-60	60 inch	Insertion Loss (Typ.)	0.53	0.68	0.89	0.98	1.42	dB	0.187
PE3C2486LF-300	300 inch	Insertion Loss (Typ.)	1.85	2.6	3.65	4.08	6.3	dB	0.827

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
Loss due to Connector 2: 0.1 dB  
Base Weight: 0.058 pounds  
Additional Weight per Inch: 0.00267 pounds

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter 0.5 in [12.7 mm]  
Weight 0.058 lbs [26.31 g]

##### Cable

Cable Type LMR-240-UF  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper  
Dielectric Type PE (F)  
Number of Shields 2  
Shield Layer 1 Aluminum Tape  
Shield Layer 2 Tinned Copper Braid  
Jacket Material TPE, Black  
Jacket Diameter 0.24 in [6.1 mm]  
One Time Minimum Bend Radius 0.75 in [19.05 mm]  
Repeated Minimum Bend Radius 2.5 in [63.5 mm]  
Bending Moment 0.13 lbs-ft [0.18 N-m]  
Flat Plate Crush 13 lbs/in [0.23 Kg/mm]  
Tensile Strength 80 lbs [36.29 Kg]

## SMA Male to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder



### PE3C2486LF

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Material and Plating	Brass, Gold	Brass, Gold
Hex Size	5/16 inch	5/16 inch
Torque	3 in-lbs 0.34 Nm	3 in-lbs 0.34 Nm

#### Environmental Specifications

Operating Range Temperature -40 to +85 deg C

#### Compliance Certifications

(see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## SMA Male to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder




### PE3C2486LF

#### Typical Performance Data

#### How to Order

Part Number Configuration:

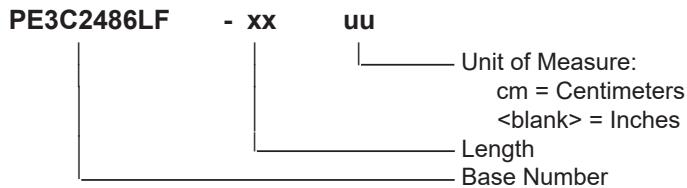

Example: PE3C2486LF-12 = 12 inches long cable  
PE3C2486LF-100cm = 100 cm long cable

SMA Male to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder PE3C2486LF](#)

URL: <https://www.pasternack.com/sma-male-to-sma-male-low-loss-cable-using-lmr-240-uf-lf-solder-pe3c2486lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

## PE3C2486LF CAD Drawing

## SMA Male to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder

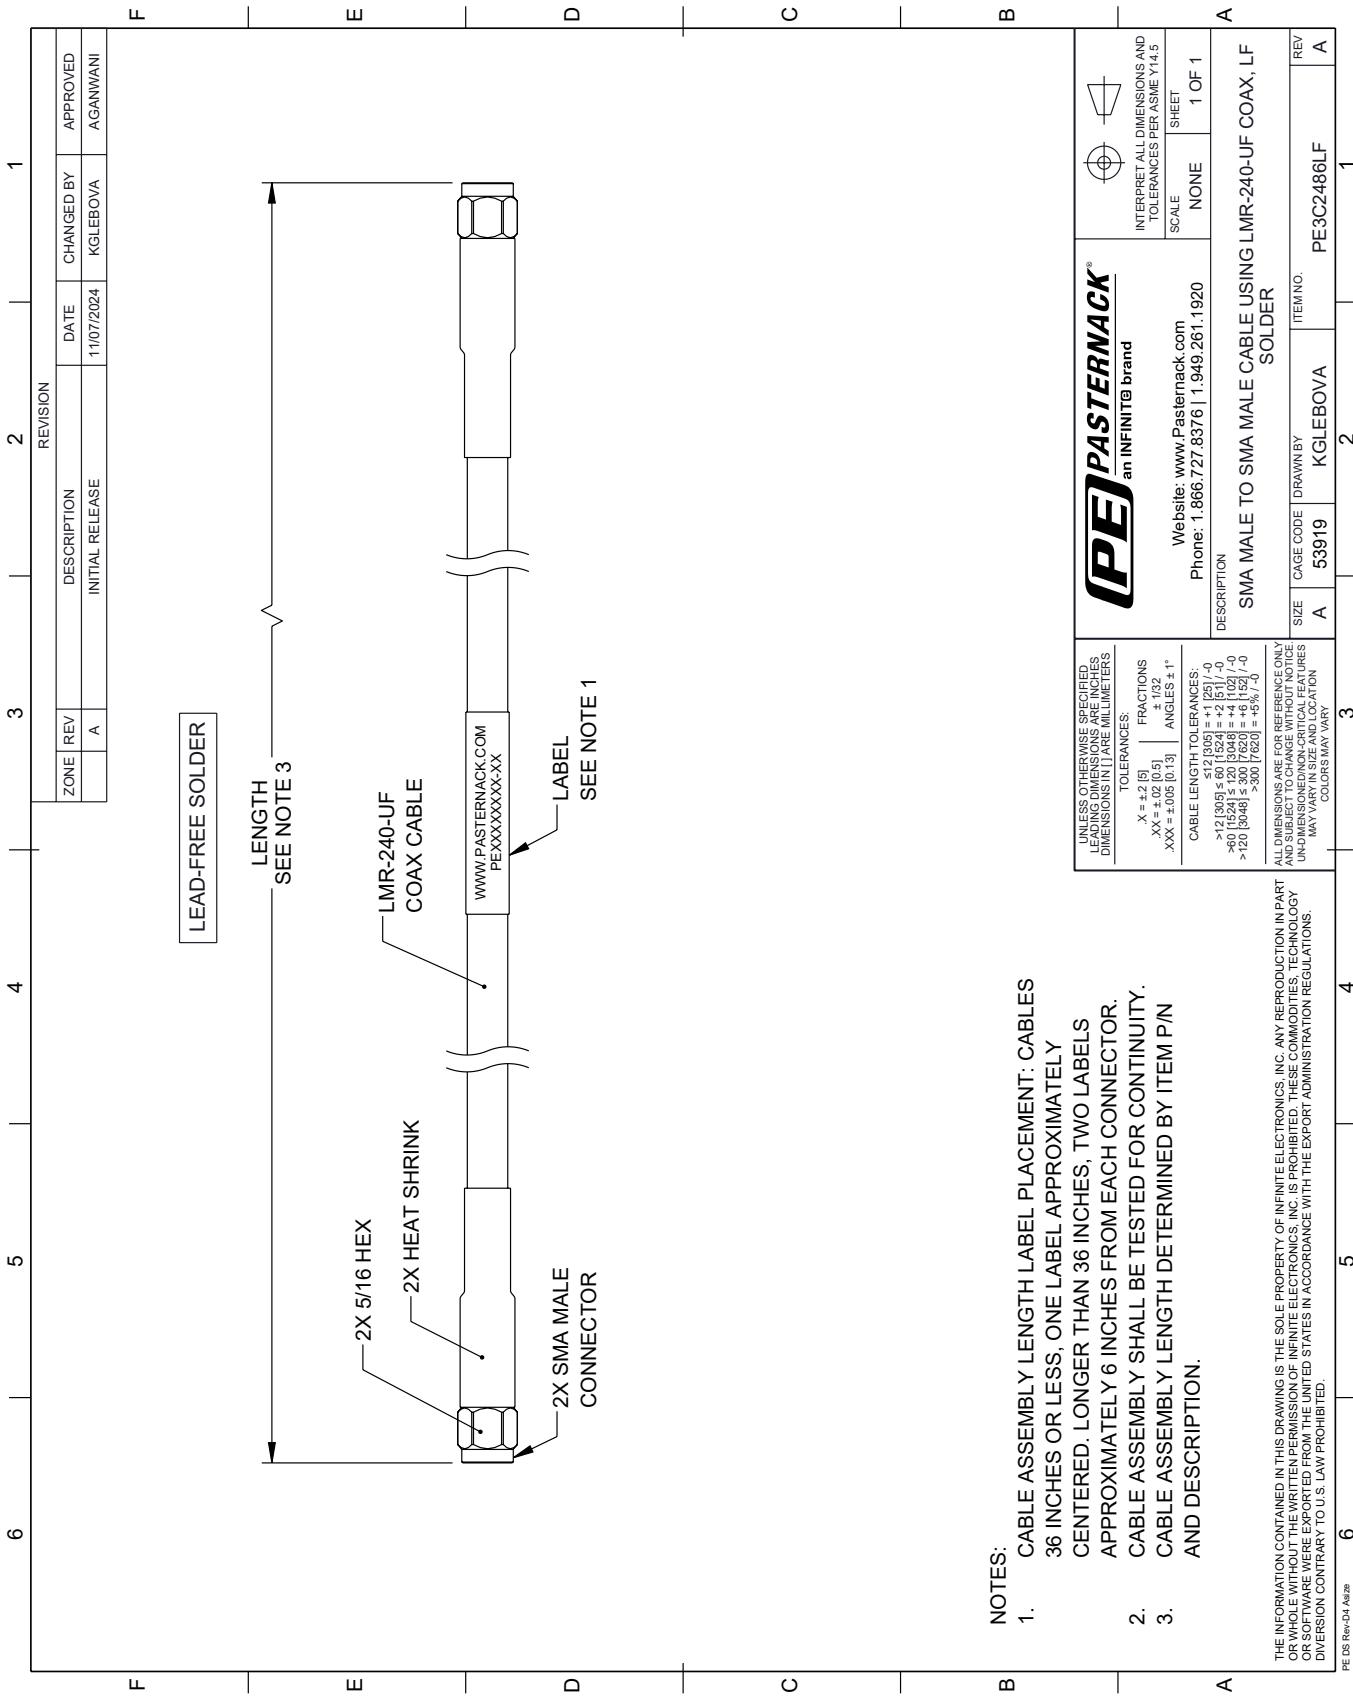

## NOTES.

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: CABLES 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PIN AND DESCRIPTION

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.