

N Male to N Male Low Loss Cable Using LMR-600-DB Coax  
With Times Microwave Components with HeatShrink



**RF Cable Assemblies Technical Data Sheet**


**PE3C2605/HS**

**Configuration**

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: LMR-600-DB

**Features**

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity
- Double Shielded
- PE Jacket

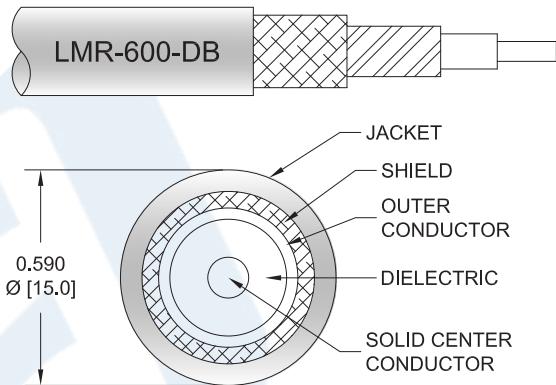

**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3C2605/HS type N male to type N male cable using LMR-600-DB coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-600-DB coax. The PE3C2605/HS type N male to type N male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-600-DB Coax With Times Microwave Components with HeatShrink PE3C2605/HS](#)

## N Male to N Male Low Loss Cable Using LMR-600-DB Coax With Times Microwave Components with HeatShrink



### RF Cable Assemblies Technical Data Sheet

**PE3C2605/HS**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		87		%
RF Shielding	90			dB
Group Delay		1.17 [3.84]		ns/ft [ns/m]
Capacitance		23.4 [76.77]		pF/ft [pF/m]
Inductance		0.058 [0.19]		uH/ft [uH/m]
DC Resistance Inner Conductor		0.53 [1.74]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.2 [3.94]		Ω/1000ft [Ω/Km]
Jacket Spark			8,000	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.012	0.017	0.026	0.044	0.073	dB/ft
	0.04	0.06	0.09	0.14	0.24	dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.405 lbs [183.7 g]

##### Cable

Cable Type LMR-600-DB  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Aluminum  
Dielectric Type PE (F)  
Number of Shields 2  
Shield Layer 1 Aluminum Tape  
Shield Layer 2 Tinned Copper Braid  
Jacket Material PE, Black  
Jacket Diameter 0.59 in [14.99 mm]

One Time Minimum Bend Radius 1.5 in [38.1 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-600-DB Coax With Times Microwave Components with HeatShrink PE3C2605/HS](#)



## N Male to N Male Low Loss Cable Using LMR-600-DB Coax With Times Microwave Components with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3C2605/HS**

Repeated Minimum Bend Radius	6 in [152.4 mm]
Bending Moment	2.75 lbs-ft [3.73 N-m]
Flat Plate Crush	60 lbs/in [1.07 Kg/mm]
Tensile Strength	350 lbs [158.76 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 $\mu$ in. minimum	50 $\mu$ in. minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	100 $\mu$ in. minimum	100 $\mu$ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 $\mu$ in. minimum	100 $\mu$ in. minimum
Hex Size	20.57 mm	20.57 mm
Torque	44 in-lbs [4.97 Nm]	44 in-lbs [4.97 Nm]

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

Shock

MIL-STD-202, Method 213, Condition I

Vibration

MIL-STD-202, Method 204, Condition B

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-600-DB Coax With Times Microwave Components with HeatShrink PE3C2605/HS](#)

N Male to N Male Low Loss Cable Using LMR-600-DB Coax  
With Times Microwave Components with HeatShrink




**RF Cable Assemblies Technical Data Sheet**

**PE3C2605/HS**

**How to Order**

Part Number Configuration:

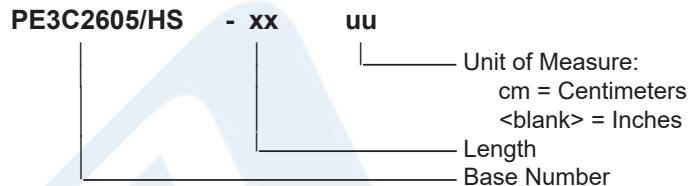

Example: PE3C2605/HS-12 = 12 inches long cable  
PE3C2605/HS-100cm = 100 cm long cable

N Male to N Male Low Loss Cable Using LMR-600-DB Coax With Times Microwave Components with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-600-DB Coax With Times Microwave Components with HeatShrink PE3C2605/HS](#)


URL: <https://www.pasternack.com/n-male-to-n-male-low-loss-cable-using-lmr-600-db-with-heatshrink-pe3c2605-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2605/HS CAD Drawing

## N Male to N Male Low Loss Cable Using LMR-600-DB Coax With Times Microwave Components with HeatShrink

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	01/13/2023	KGLEBOVA	AGANWANI

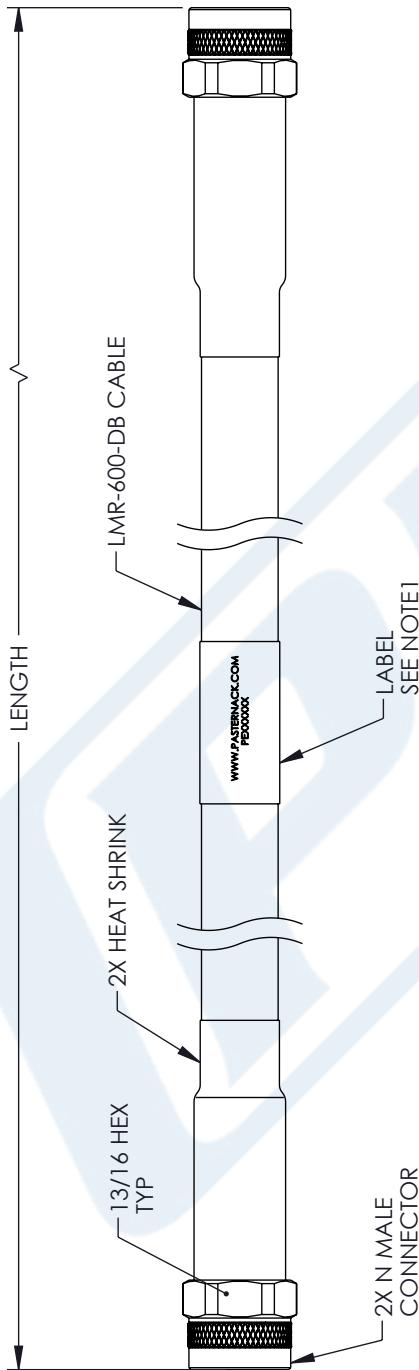

## NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.  
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE  
U.S. EMBARGO AND TRADE CONTROL LAWS.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

OPTION WEBSITE: <a href="http://www.easterntrack.com">www.easterntrack.com</a> PHONE: 1.866.727.8376   1.949.261.1920	NONE	1 OF 1
---	------	--------

COMPONENTS				ITEM NO.	PE3C2605/HS	REV A
SIZE	CAGE CODE	DRAWN BY				
A	53919	KGLEBOVA				

22

4

6