



N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet


PE3C2764/HS

Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Female
- Cable Type: LMR-240

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

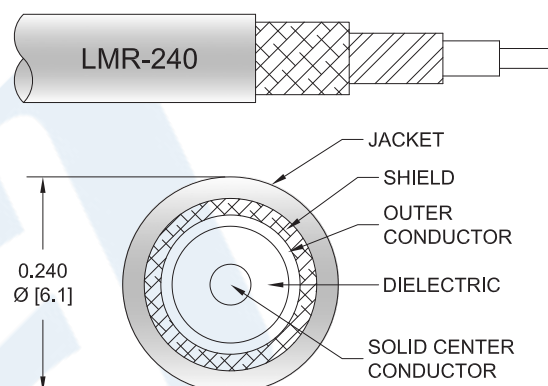

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C2764/HS type N male right angle to type N female cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-240 coax. The PE3C2764/HS type N male to type N female cable assembly operates to 5.8 GHz. The right angle type N interface on the LMR-240 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink PE3C2764/HS](#)



N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C2764/HS

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 84 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.21 [3.97] | | ns/ft [ns/m] |
| Capacitance | | 24.2 [79.4] | | pF/ft [pF/m] |
| Inductance | | 0.06 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 3.2 [10.5] | | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor | | 3.89 [12.76] | | Ω/1000ft [Ω/Km] |
| Jacket Spark | | | 5,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-------|-------|-------|-------|-------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Typ.) | 0.039 | 0.055 | 0.079 | 0.129 | 0.204 | dB/ft |
| | 0.13 | 0.18 | 0.26 | 0.42 | 0.67 | dB/m |

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the N female connector and 0.2 dB for the N male connector.

Mechanical Specifications

Cable Assembly

Weight 0.199 lbs [90.26 g]

Cable

| | |
|--------------------------------------|---------------------|
| Cable Type | LMR-240 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.24 in [6.1 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink PE3C2764/HS](#)



N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C2764/HS

| | |
|------------------------------|------------------------|
| One Time Minimum Bend Radius | 0.75 in [19.05 mm] |
| Repeated Minimum Bend Radius | 2.5 in [63.5 mm] |
| Bending Moment | 0.25 lbs-ft [0.34 N-m] |
| Flat Plate Crush | 20 lbs/in [0.36 Kg/mm] |
| Tensile Strength | 80 lbs [36.29 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------|--------------------|------------------------|
| Type | N Male Right Angle | N Female |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | | 500 |
| Contact Material and Plating | Brass, Gold | Beryllium Copper, Gold |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink PE3C2764/HS](#)



N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C2764/HS

How to Order

Part Number Configuration:

PE3C2764/HS - xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C2764/HS-12 = 12 inches long cable
PE3C2764/HS-100cm = 100 cm long cable

N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink PE3C2764/HS](#)

URL: <https://www.pasternack.com/n-male-right-angle-to-n-female-low-loss-cable-using-lmr-240-with-heatshrink-pe3c2764-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2764/HS CAD Drawing

N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink

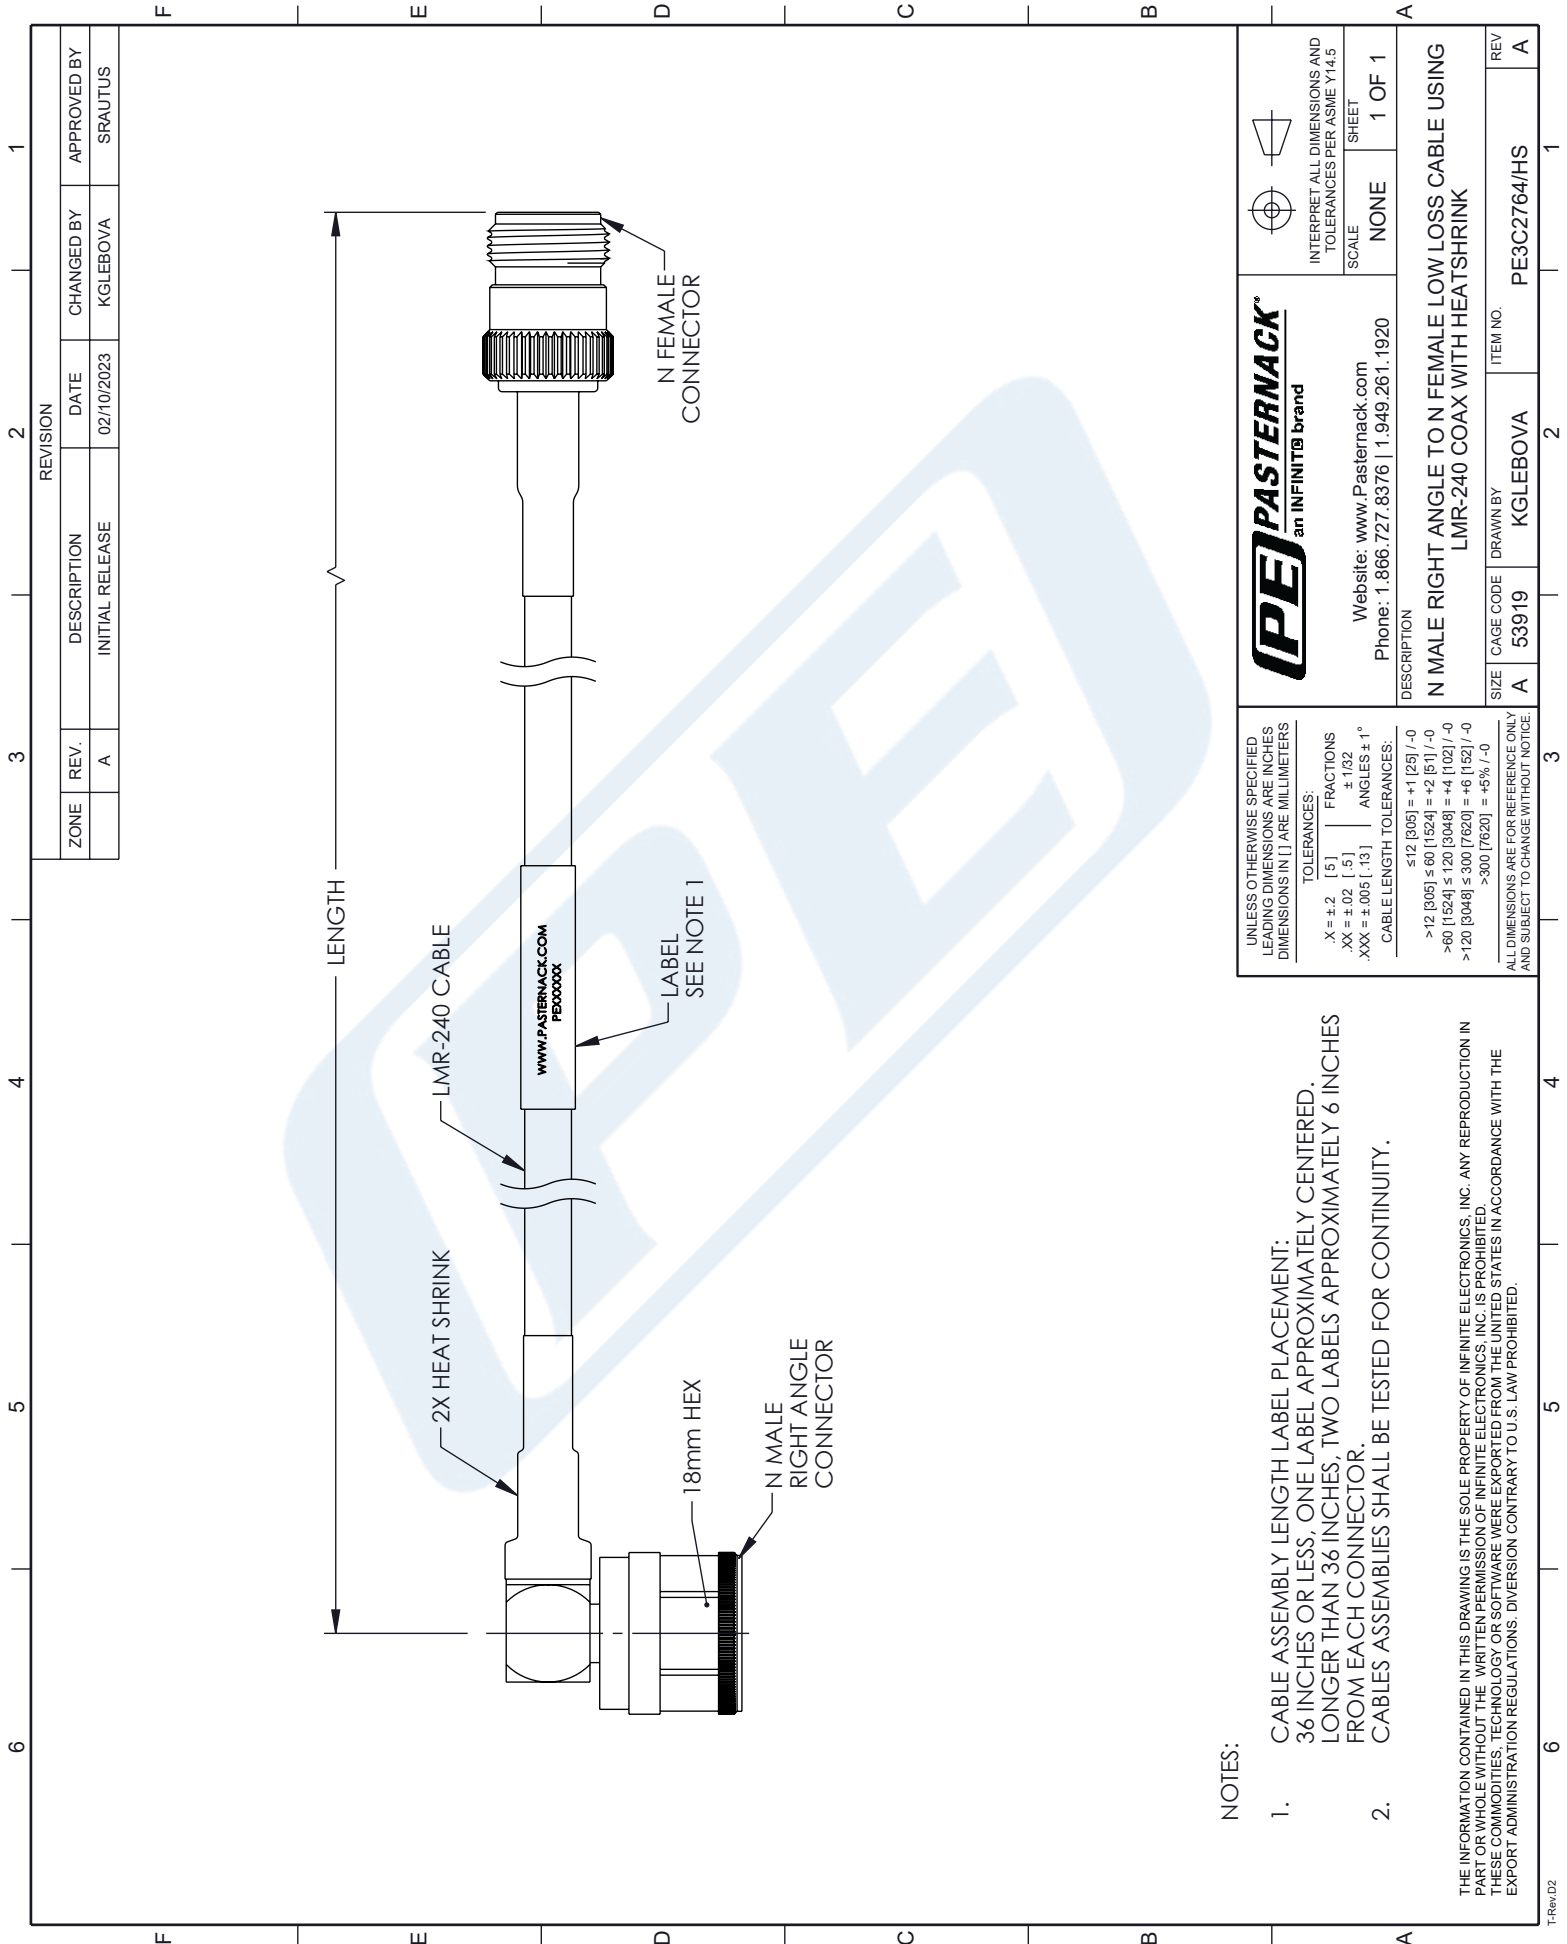

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES
FROM EACH CONNECTOR.
2. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

| | | | |
|---|------------------|---|-----------------------|
| PASTERNAK an INFINIT® brand | | SCALE: NONE SHEET: 1 OF 1 | |
| Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920 | | DESCRIPTION: N MALE RIGHT ANGLE TO N FEMALE LOW LOSS CABLE USING LMR-240 COAX WITH HEATSHRINK | |
| SIZE: A | CAGE CODE: 53919 | DRAWN BY: KGLEBOVA | ITEM NO.: PE3C2764/HS |
| REV: A | | | |

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
.X = ±.2 [.5] FRACTIONS ±.1/32
.XX = ±.02 [.5] ANGLES ± 1°
.XXX = ±.005 [.13]

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.